NAG Library Routine Document E02ZAF

Note: before using this routine, please read the Users' Note for your implementation to check the interpretation of **bold italicised** terms and other implementation-dependent details.

1 Purpose

E02ZAF sorts two-dimensional data into rectangular panels.

2 Specification

```
SUBROUTINE E02ZAF (PX, PY, LAMDA, MU, M, X, Y, POINT, NPOINT, ADRES, NADRES, IFAIL)

INTEGER

PX, PY, M, POINT(NPOINT), NPOINT, ADRES(NADRES), NADRES, IFAIL

REAL (KIND=nag_wp) LAMDA(PX), MU(PY), X(M), Y(M)
```

3 Description

A set of m data points with rectangular Cartesian coordinates x_r, y_r are sorted into panels defined by lines parallel to the y and x axes. The intercepts of these lines on the x and y axes are given in LAMDA(i), for $i = 5, 6, \ldots, PX - 4$ and MU(j), for $j = 5, 6, \ldots, PY - 4$, respectively. The subroutine orders the data so that all points in a panel occur before data in succeeding panels, where the panels are numbered from bottom to top and then left to right, with the usual arrangement of axes, as shown in the diagram. Within a panel the points maintain their original order.

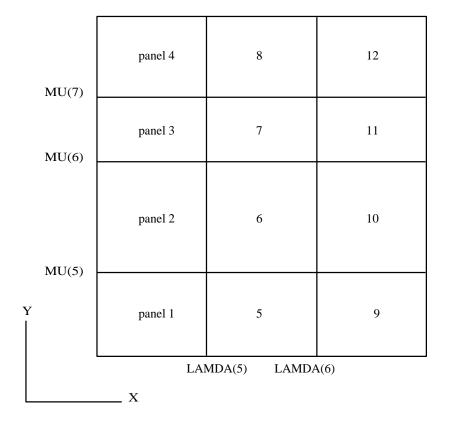


Figure 1

Mark 24 E02ZAF.1

E02ZAF NAG Library Manual

A data point lying exactly on one or more panel sides is taken to be in the highest-numbered panel adjacent to the point. The subroutine does not physically rearrange the data, but provides the array POINT which contains a linked list for each panel, pointing to the data in that panel. The total number of panels is $(PX - 7) \times (PY - 7)$.

4 References

None.

5 Parameters

1: PX – INTEGER
 2: PY – INTEGER
 Input

On entry: PX and PY must specify eight more than the number of intercepts on the x axis and y axis, respectively.

Constraint: $PX \ge 8$ and $PY \ge 8$.

3: LAMDA(PX) - REAL (KIND=nag_wp) array

Input

On entry: LAMDA(5) to LAMDA(PX – 4) must contain, in nondecreasing order, the intercepts on the x axis of the sides of the panels parallel to the y axis.

4: MU(PY) – REAL (KIND=nag_wp) array

Input

On entry: MU(5) to MU(PY - 4) must contain, in nondecreasing order, the intercepts on the y axis of the sides of the panels parallel to the x axis.

5: M – INTEGER Input

On entry: the number m of data points.

```
6: X(M) - REAL (KIND=nag_wp) array
```

Input

7: Y(M) - REAL (KIND=nag wp) array

Input

On entry: the coordinates of the rth data point (x_r, y_r) , for r = 1, 2, ..., m.

8: POINT(NPOINT) – INTEGER array

Output

On exit: for i = 1, 2, ..., NPOINT, POINT(m + i) = I1 is the index of the first point in panel i, POINT(I1) = I2 is the index of the second point in panel i and so on.

POINT(In) = 0 indicates that X(In), Y(In) was the last point in the panel.

The coordinates of points in panel i can be accessed in turn by means of the following instructions:

```
IN = M + I
10 IN = POINT(IN)
IF (IN.EQ. 0) GOTO 20
XI = X(IN)
YI = Y(IN)
.
.
.
GOTO 10
20 ...
```

9: NPOINT – INTEGER

Input

On entry: the dimension of the array POINT as declared in the (sub)program from which E02ZAF is called.

Constraint: NPOINT \geq M + (PX - 7) \times (PY - 7).

E02ZAF.2 Mark 24

10: ADRES(NADRES) - INTEGER array Workspace Input

NADRES - INTEGER 11:

On entry: the value $(PX - 7) \times (PY - 7)$, the number of panels into which the (x, y) plane is divided.

IFAIL - INTEGER 12:

Input/Output

On entry: IFAIL must be set to 0, -1 or 1. If you are unfamiliar with this parameter you should refer to Section 3.3 in the Essential Introduction for details.

For environments where it might be inappropriate to halt program execution when an error is detected, the value -1 or 1 is recommended. If the output of error messages is undesirable, then the value 1 is recommended. Otherwise, if you are not familiar with this parameter, the recommended value is 0. When the value -1 or 1 is used it is essential to test the value of IFAIL on exit.

On exit: IFAIL = 0 unless the routine detects an error or a warning has been flagged (see Section 6).

6 **Error Indicators and Warnings**

If on entry IFAIL = 0 or -1, explanatory error messages are output on the current error message unit (as defined by X04AAF).

Errors or warnings detected by the routine:

```
IFAIL = 1
```

The intercepts in the array LAMDA, or in the array MU, are not in nondecreasing order.

```
IFAIL = 2
```

```
On entry, PX < 8,
          PY < 8,
or
          M < 0,
or
          NADRES \neq (PX - 7) × (PY - 7),
or
          NPOINT < M + (PX - 7) \times (PY - 7).
or
```

7 Accuracy

Not applicable.

8 **Further Comments**

The time taken is approximately proportional to $m \times \log(\text{NPOINT})$.

This subroutine was written to sort two-dimensional data in the manner required by routine E02DAF. The first 9 parameters of E02ZAF are the same as the parameters in E02DAF which have the same name.

9 **Example**

This example reads in data points and the intercepts of the panel sides on the x and y axes; it calls E02ZAF to set up the index array POINT; and finally it prints the data points in panel order.

Mark 24 E02ZAF.3 E02ZAF NAG Library Manual

9.1 Program Text

```
Program e02zafe
     E02ZAF Example Program Text
!
1
     Mark 24 Release. NAG Copyright 2012.
      .. Use Statements ..
     Use nag_library, Only: e02zaf, nag_wp
!
      .. Implicit None Statement ..
     Implicit None
!
      .. Parameters ..
                                       :: nin = 5, nout = 6
     Integer, Parameter
      .. Local Scalars ..
     Integer
                                       :: i, iadres, ifail, m, nadres, npoint, &
                                          px, py
!
      .. Local Arrays ..
     Real (Kind=nag_wp), Allocatable :: lamda(:), mu(:), x(:), y(:)
      Integer, Allocatable
                                       :: adres(:), point(:)
!
      .. Executable Statements ..
      Write (nout,*) 'E02ZAF Example Program Results'
     Skip heading in data file
     Read (nin,*)
     Read (nin,*) m
     Read (nin,*) px, py
     nadres = (px-7)*(py-7)
     npoint = m + nadres
     Allocate (adres(nadres),lamda(px),mu(py),x(m),y(m),point(npoint))
!
     Read data points and intercepts of panel sides
     Read (nin,*)(x(i),y(i),i=1,m)
      If (px>8) Then
       Read (nin,*) lamda(5:(px-4))
     End If
      If (py>8) Then
       Read (nin,*) mu(5:(py-4))
!
     Sort points into panel order
      ifail = 0
     Call e02zaf(px,py,lamda,mu,m,x,y,point,npoint,adres,nadres,ifail)
     Output points in panel order
      Do i = 1, nadres
       Write (nout,*)
        Write (nout, 99999) 'Panel', i
        iadres = m + i
loop:
          iadres = point(iadres)
          If (iadres<=0) Then
           Exit loop
          End If
          Write (nout,99998) x(iadres), y(iadres)
        End Do loop
     End Do
99999 Format (1X,A,I4)
99998 Format (1X,2F7.2)
   End Program e02zafe
```

E02ZAF.4 Mark 24

9.2 Program Data

```
E02ZAF Example Program Data
 10
  9
 10
0
       0.77
0.70
       1.06
      0.33
1.44
0.21
      0.44
1.01
      0.50
1.84
       0.02
0.71
       1.95
     1.20
1.00
0.54
     0.04
1.53
      0.18
1.00
0.80
1.20
0
```

9.3 Program Results

E02ZAF Example Program Results

Mark 24 E02ZAF.5 (last)