

NAG Library Function Document

nag_bessel_j0 (s17aec)

1 Purpose

nag_bessel_j0 (s17aec) returns the value of the Bessel function $J_0(x)$.

2 Specification

```
#include <nag.h>
#include <nags.h>
double nag_bessel_j0 (double x, NagError *fail)
```

3 Description

nag_bessel_j0 (s17aec) evaluates an approximation to the Bessel function of the first kind $J_0(x)$.

Note: $J_0(-x) = J_0(x)$, so the approximation need only consider $x \geq 0$.

The function is based on three Chebyshev expansions:

For $0 < x \leq 8$,

$$J_0(x) = \sum_{r=0} a_r T_r(t), \quad \text{with } t = 2\left(\frac{x}{8}\right)^2 - 1.$$

For $x > 8$,

$$J_0(x) = \sqrt{\frac{2}{\pi x}} \left\{ P_0(x) \cos\left(x - \frac{\pi}{4}\right) - Q_0(x) \sin\left(x - \frac{\pi}{4}\right) \right\},$$

where $P_0(x) = \sum_{r=0} b_r T_r(t)$,

and $Q_0(x) = \frac{8}{x} \sum_{r=0} c_r T_r(t)$,

with $t = 2\left(\frac{8}{x}\right)^2 - 1$.

For x near zero, $J_0(x) \simeq 1$. This approximation is used when x is sufficiently small for the result to be correct to **machine precision**.

For very large x , it becomes impossible to provide results with any reasonable accuracy (see Section 7), hence the function fails. Such arguments contain insufficient information to determine the phase of oscillation of $J_0(x)$; only the amplitude, $\sqrt{\frac{2}{\pi|x|}}$, can be determined and this is returned on failure. The range for which this occurs is roughly related to **machine precision**; the function will fail if $|x| \gtrsim 1/\text{machine precision}$ (see the Users' Note for your implementation for details).

4 References

Abramowitz M and Stegun I A (1972) *Handbook of Mathematical Functions* (3rd Edition) Dover Publications

Clenshaw C W (1962) Chebyshev Series for Mathematical Functions *Mathematical tables* HMSO

5 Arguments

- 1: **x** – double *Input*
On entry: the argument x of the function.
- 2: **fail** – NagError * *Input/Output*
 The NAG error argument (see Section 3.6 in the Essential Introduction).

6 Error Indicators and Warnings

NE_INTERNAL_ERROR

An internal error has occurred in this function. Check the function call and any array sizes. If the call is correct then please contact NAG for assistance.

NE_REAL_ARG_GT

On entry, **x** = $\langle value \rangle$.

Constraint: $|\mathbf{x}| \leq \langle value \rangle$.

$|\mathbf{x}|$ is too large, the function returns the amplitude of the J_0 oscillation, $\sqrt{2/(\pi|x|)}$.

7 Accuracy

Let δ be the relative error in the argument and E be the absolute error in the result. (Since $J_0(x)$ oscillates about zero, absolute error and not relative error is significant.)

If δ is somewhat larger than the *machine precision* (e.g., if δ is due to data errors etc.), then E and δ are approximately related by:

$$E \simeq |xJ_1(x)|\delta$$

(provided E is also within machine bounds). Figure 1 displays the behaviour of the amplification factor $|xJ_1(x)|$.

However, if δ is of the same order as *machine precision*, then rounding errors could make E slightly larger than the above relation predicts.

For very large x , the above relation ceases to apply. In this region, $J_0(x) \simeq \sqrt{\frac{2}{\pi|x|}} \cos\left(x - \frac{\pi}{4}\right)$. The amplitude $\sqrt{\frac{2}{\pi|x|}}$ can be calculated with reasonable accuracy for all x , but $\cos\left(x - \frac{\pi}{4}\right)$ cannot. If $x - \frac{\pi}{4}$ is written as $2N\pi + \theta$ where N is an integer and $0 \leq \theta < 2\pi$, then $\cos\left(x - \frac{\pi}{4}\right)$ is determined by θ only. If $x \gtrsim \delta^{-1}$, θ cannot be determined with any accuracy at all. Thus if x is greater than, or of the order of, the inverse of the *machine precision*, it is impossible to calculate the phase of $J_0(x)$ and the function must fail.

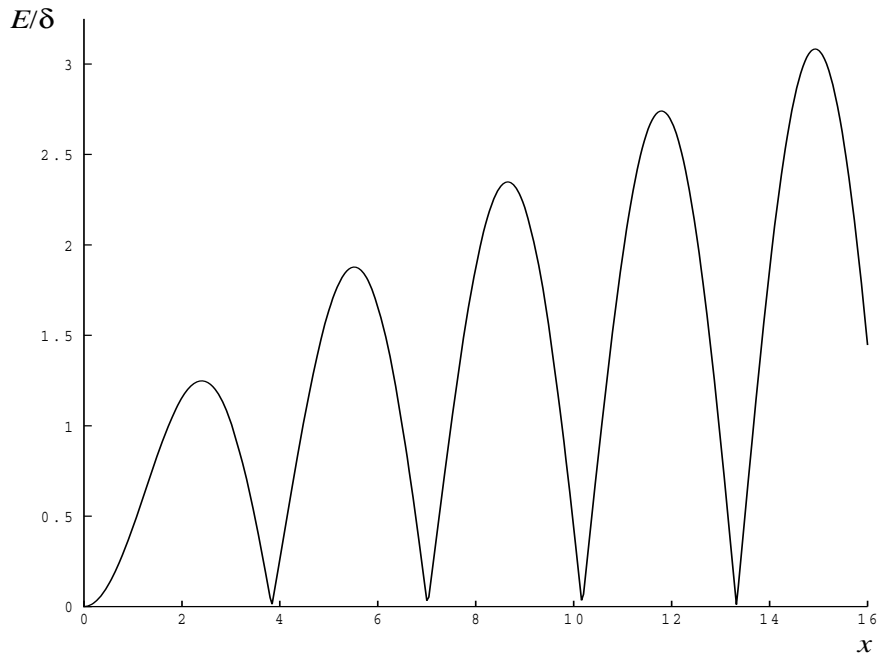


Figure 1

8 Parallelism and Performance

Not applicable.

9 Further Comments

None.

10 Example

This example reads values of the argument x from a file, evaluates the function at each value of x and prints the results.

10.1 Program Text

```

/* nag_bessel_j0 (s17aec) Example Program.
 *
 * Copyright 1990 Numerical Algorithms Group.
 *
 * Mark 2 revised, 1992.
 */

#include <nag.h>
#include <stdio.h>
#include <nag_stdlib.h>
#include <nags.h>

int main(void)
{
    Integer  exit_status = 0;
    double   x, y;
    NagError fail;

    INIT_FAIL(fail);

    /* Skip heading in data file */
    scanf("%*[\n]");
    printf("nag_bessel_j0 (s17aec) Example Program Results\n");

```

```

printf("      x          y\n");
while (scanf("%lf", &x) != EOF)
{
  /* nag_bessel_j0 (s17aec).
   * Bessel function J_0(x)
   */
  y = nag_bessel_j0(x, &fail);
  if (fail.code != NE_NOERROR)
  {
    printf("Error from nag_bessel_j0 (s17aec).\n%s\n",
           fail.message);
    exit_status = 1;
    goto END;
  }
  printf("%12.3e%12.3e\n", x, y);
}

END:
return exit_status;
}

```

10.2 Program Data

nag_bessel_j0 (s17aec) Example Program Data

```

0.0
0.5
1.0
3.0
6.0
8.0
10.0
-1.0
1000.0

```

10.3 Program Results

nag_bessel_j0 (s17aec) Example Program Results

```

      x          y
0.000e+00  1.000e+00
5.000e-01  9.385e-01
1.000e+00  7.652e-01
3.000e+00 -2.601e-01
6.000e+00  1.506e-01
8.000e+00  1.717e-01
1.000e+01 -2.459e-01
-1.000e+00  7.652e-01
1.000e+03  2.479e-02

```

