NAG Library Routine Document D02NBF

Note: before using this routine, please read the Users' Note for your implementation to check the interpretation of **bold italicised** terms and other implementation-dependent details.

1 Purpose

D02NBF is a direct communication routine for integrating stiff systems of explicit ordinary differential equations when the Jacobian is a full matrix.

2 Specification

```
SUBROUTINE DO2NBF (NEQ, LDYSAV, T, TOUT, Y, YDOT, RWORK, RTOL, ATOL, ITOL, INFORM, FCN, YSAV, SDYSAV, JAC, WKJAC, NWKJAC, MONITR, ITASK, ITRACE, IFAIL)

INTEGER

NEQ, LDYSAV, ITOL, INFORM(23), SDYSAV, NWKJAC, ITASK, ITRACE, IFAIL

REAL (KIND=nag_wp) T, TOUT, Y(NEQ), YDOT(NEQ), RWORK(50+4*NEQ), RTOL(*), ATOL(*), YSAV(LDYSAV, SDYSAV), WKJAC(NWKJAC)

EXTERNAL

EXTERNAL

FCN, JAC, MONITR
```

3 Description

D02NBF is a general purpose routine for integrating the initial value problem for a stiff system of explicit ordinary differential equations,

$$y' = g(t, y).$$

It is designed specifically for the case where the Jacobian $\frac{\partial g}{\partial u}$ is a full matrix.

Both interval and step oriented modes of operation are available and also modes designed to permit intermediate output within an interval oriented mode.

An outline of a typical calling program for D02NBF is given below. It calls the full matrix linear algebra setup routine D02NSF, the Backward Differentiation Formula (BDF) integrator setup routine D02NVF, and its diagnostic counterpart D02NYF.

```
Declarations

EXTERNAL FCN, JAC, MONITR

...

IFAIL = 0

CALL DO2NVF(...,IFAIL)

CALL DO2NSF(NEQ, LDYSAV, JCEVAL, NWKJAC, RWORK, IFAIL)

IFAIL = -1

CALL DO2NBF(NEQ, LDYSAV, T, TOUT, Y, YDOT, RWORK, RTOL, & ATOL, ITOL, INFORM, FCN, YSAVE, SDYSAV, JAC, WKJAC, NWKJAC, & MONITR, ITASK, ITRACE, IFAIL)

IF (IFAIL.EQ.1 .OR. IFAIL.GE.14) STOP

IFAIL = 0

CALL DO2NYF(...)

...

STOP
END
```

The linear algebra setup routine D02NSF and one of the integrator setup routines, D02NVF or D02NWF, must be called prior to the call of D02NBF. The integrator diagnostic routine D02NYF may be called after the call to D02NBF. There is also a routine, D02NZF, designed to permit you to change step size on a continuation call to D02NBF without restarting the integration process.

4 References

See the D02M-N Sub-chapter Introduction.

5 Arguments

1: NEQ – INTEGER

Input

On entry: the number of differential equations to be solved.

Constraint: $NEQ \ge 1$.

2: LDYSAV – INTEGER

Input

On entry: a bound on the maximum number of differential equations to be solved during the integration.

Constraint: LDYSAV \geq NEQ.

3: $T - REAL (KIND=nag_wp)$

Input/Output

On entry: t, the value of the independent variable. The input value of T is used only on the first call as the initial point of the integration.

On exit: the value at which the computed solution y is returned (usually at TOUT).

4: TOUT - REAL (KIND=nag wp)

Input

On entry: the next value of t at which a computed solution is desired. For the initial t, the input value of TOUT is used to determine the direction of integration. Integration is permitted in either direction (see also ITASK).

Constraint: $TOUT \neq T$.

5: Y(NEQ) – REAL (KIND=nag wp) array

Input/Output

On entry: the values of the dependent variables (solution). On the first call the first NEQ elements of Y must contain the vector of initial values.

On exit: the computed solution vector, evaluated at T (usually T = TOUT).

6: YDOT(NEQ) – REAL (KIND=nag wp) array

Output

On exit: the time derivatives y' of the vector y at the last integration point.

7: RWORK $(50 + 4 \times NEQ)$ – REAL (KIND=nag wp) array

Communication Array

8: RTOL(*) - REAL (KIND=nag_wp) array

Input

Note: the dimension of the array RTOL must be at least 1 if ITOL = 1 or 2, and at least NEQ otherwise.

On entry: the relative local error tolerance.

Constraint: RTOL(i) ≥ 0.0 for all relevant i (see ITOL).

D02NBF.2 Mark 26

9: ATOL(*) - REAL (KIND=nag wp) array

Input

Note: the dimension of the array ATOL must be at least 1 if ITOL = 1 or 3, and at least NEQ otherwise.

On entry: the absolute local error tolerance.

Constraint: ATOL(i) > 0.0 for all relevant i (see ITOL).

ITOL - INTEGER 10:

Input

On entry: a value to indicate the form of the local error test. ITOL indicates to D02NBF whether to interpret either or both of RTOL or ATOL as a vector or a scalar. The error test to be satisfied is $||e_i/w_i|| < 1.0$, where w_i is defined as follows:

ITOL	RTOL	ATOL	w_i
1			$RTOL(1) \times y_i + ATOL(1)$
2	scalar	vector	$RTOL(1) \times y_i + ATOL(i)$
3	vector	scalar	$RTOL(i) \times y_i + ATOL(1)$
4	vector	vector	$RTOL(i) \times y_i + ATOL(i)$

 e_i is an estimate of the local error in y_i , computed internally, and the choice of norm to be used is defined by a previous call to an integrator setup routine.

Constraint: ITOL = 1, 2, 3 or 4.

INFORM(23) – INTEGER array 11:

Communication Array

12: FCN – SUBROUTINE, supplied by the user. External Procedure

FCN must evaluate the derivative vector for the explicit ordinary differential equation system, defined by y' = g(t, y).

```
The specification of FCN is:
```

```
SUBROUTINE FCN (NEQ, T, Y, F, IRES)
```

NEQ - INTEGER

Input

On entry: the number of differential equations being solved.

2: T - REAL (KIND=nag wp) Input

On entry: t, the current value of the independent variable.

Y(NEQ) - REAL (KIND=nag_wp) array

Input

On entry: the value of y_i , for i = 1, 2, ..., NEQ.

F(NEQ) – REAL (KIND=nag wp) array

Output

On exit: the value y_i' , given by $y_i' = g_i(t, y)$, for i = 1, 2, ..., NEQ.

IRES - INTEGER

Input/Output

On entry: IRES = 1.

On exit: you may set IRES as follows to indicate certain conditions in FCN to the integrator:

IRES = 1

Indicates a normal return from FCN, that is IRES has not been altered by you and integration continues.

IRES = 2

Indicates to the integrator that control should be passed back immediately to the calling (sub)program with the error indicator set to IFAIL = 11.

IRES = 3

Indicates to the integrator that an error condition has occurred in the solution vector, its time derivative or in the value of t. The integrator will use a smaller time step to try to avoid this condition. If this is not possible the integrator returns to the calling (sub)program with the error indicator set to IFAIL = 7.

IRES = 4

Indicates to the integrator to stop its current operation and to enter MONITR immediately with argument IMON = -2.

FCN must either be a module subprogram USEd by, or declared as EXTERNAL in, the (sub) program from which D02NBF is called. Arguments denoted as *Input* must **not** be changed by this procedure.

13: YSAV(LDYSAV, SDYSAV) - REAL (KIND=nag wp) array

Communication Array

14: SDYSAV – INTEGER

Input

On entry: the second dimension of the array YSAV as declared in the (sub)program from which D02NBF is called. An appropriate value for SDYSAV is described in the specification of the integrator setup routines D02NVF and D02NWF. This value must be the same as that supplied to the integrator setup routine.

15: JAC – SUBROUTINE, supplied by the NAG Library or the user. External Procedure

JAC must evaluate the Jacobian of the system. If this option is not required, the actual argument for JAC must be the dummy routine D02NBZ. (D02NBZ is included in the NAG Library.) You must indicate to the integrator whether this option is to be used by setting the argument JCEVAL appropriately in a call to the full linear algebra setup routine D02NSF.

First we must define the system of nonlinear equations which is solved internally by the integrator. The time derivative, y', generated internally, has the form

$$y' = (y - z)/(hd),$$

where h is the current step size and d is an argument that depends on the integration method in use. The vector y is the current solution and the vector z depends on information from previous time steps. This means that $\frac{d}{dy}(\)=(hd)\frac{d}{dy}(\)$. The system of nonlinear equations that is solved has the form

$$y' - g(t, y) = 0$$

but it is solved in the form

$$r(t, y) = 0,$$

where r is the function defined by

$$r(t, y) = (hd)((y - z)/(hd) - q(t, y)).$$

It is the Jacobian matrix $\frac{\partial r}{\partial y}$ that you must supply in JAC as follows:

D02NBF.4 Mark 26

$$\frac{\partial r_i}{\partial y_j} = 1 - (hd) \frac{\partial g_i}{\partial y_j}, \text{ if } i = j,$$

$$\frac{\partial r_i}{\partial y_j} = -(hd)\frac{\partial g_i}{\partial y_j}, \quad \text{otherwise}$$

The specification of JAC is:

SUBROUTINE JAC (NEQ, T, Y, H, D, P)

INTEGER

REAL (KIND=nag_wp) T, Y(NEQ), H, D, P(NEQ, NEQ)

1: NEQ – INTEGER

Input

On entry: the number of differential equations being solved.

2: $T - REAL (KIND=nag_wp)$

Input

On entry: t, the current value of the independent variable.

3: Y(NEQ) - REAL (KIND=nag wp) array

Input

On entry: y_i , for i = 1, 2, ..., NEQ, the current solution component.

4: $H - REAL (KIND=nag_wp)$

Input

On entry: the current step size.

5: D - REAL (KIND=nag wp)

Input

On entry: the argument d which depends on the integration method.

6: P(NEQ, NEQ) - REAL (KIND=nag wp) array

Input/Output

On entry: is set to zero.

On exit: P(i,j) must contain $\frac{\partial r_i}{\partial y_j}$, for $i=1,2,\ldots, \text{NEQ}$ and $j=1,2,\ldots, \text{NEQ}$.

Only the nonzero elements of this array need be set, since it is preset to zero before the call to JAC.

JAC must either be a module subprogram USEd by, or declared as EXTERNAL in, the (sub) program from which D02NBF is called. Arguments denoted as *Input* must **not** be changed by this procedure.

16: WKJAC(NWKJAC) – REAL (KIND=nag_wp) array

Communication Array

17: NWKJAC – INTEGER

Input

On entry: the dimension of the array WKJAC as declared in the (sub)program from which D02NBF is called. This value must be the same as that supplied to the linear algebra setup routine D02NSF.

Constraint: $NWKJAC \ge LDYSAV \times (LDYSAV + 1)$.

18: MONITR – SUBROUTINE, supplied by the NAG Library or the user. *External Procedure* MONITR performs tasks requested by you. If this option is not required, then the actual argument for MONITR must be the dummy routine D02NBY. (D02NBY is included in the NAG Library.)

```
The specification of MONITR is:
```

```
SUBROUTINE MONITR (NEQ, LDYSAV, T, HLAST, HNEXT, Y, YDOT, YSAV, R, ACOR, IMON, INLN, HMIN, HMAX, NQU)
```

INTEGER NEQ, LDYSAV, IMON, INLN, NQU
REAL (KIND=nag_wp) T, HLAST, HNEXT, Y(NEQ), YDOT(NEQ), & YSAV(LDYSAV, sdysav), R(NEQ), ACOR(NEQ,2), HMIN, & HMAX

where sdysav is the numerical value of SDYSAV in the call of D02NBF.

1: NEO – INTEGER

Input

On entry: the number of differential equations being solved.

2: LDYSAV – INTEGER

Input

On entry: an upper bound on the number of differential equations to be solved.

3: T - REAL (KIND=nag wp)

Input

On entry: the current value of the independent variable.

4: HLAST - REAL (KIND=nag_wp)

Input

On entry: the last step size successfully used by the integrator.

5: HNEXT - REAL (KIND=nag wp)

Input/Output

On entry: the step size that the integrator proposes to take on the next step.

On exit: the next step size to be used. If this is different from the input value, then IMON must be set to 4.

6: Y(NEQ) - REAL (KIND=nag wp) array

Input/Output

On entry: y, the values of the dependent variables evaluated at t.

On exit: these values must not be changed unless IMON is set to 2.

7: YDOT(NEQ) - REAL (KIND=nag wp) array

Input

On entry: the time derivatives y' of the vector y.

8: YSAV(LDYSAV, sdysav) - REAL (KIND=nag_wp) array

Input

On entry: workspace to enable you to carry out interpolation using either of the routines D02XJF or D02XKF.

9: R(NEQ) - REAL (KIND=nag_wp) array

Input

On entry: if IMON = 0 and INLN = 3, the first NEQ elements contain the residual vector, y' - g(t, y).

10: ACOR(NEQ, 2) - REAL (KIND=nag wp) array

Input

On entry: with IMON = 1, ACOR(i, 1) contains the weight used for the *i*th equation when the norm is evaluated, and ACOR(i, 2) contains the estimated local error for the *i*th equation. The scaled local error at the end of a timestep may be obtained by calling the real function D02ZAF as follows:

```
IFAIL = 1
ERRLOC = D02ZAF(NEQ, ACOR(1,2), ACOR(1,1), IFAIL)
! CHECK IFAIL BEFORE PROCEEDING
```

D02NBF.6 Mark 26

11: IMON – INTEGER

Input/Output

On entry: a flag indicating under what circumstances MONITR was called:

IMON = -2

Entry from the integrator after IRES = 4 (set in FCN) caused an early termination (this facility could be used to locate discontinuities).

IMON = -1

The current step failed repeatedly.

IMON = 0

Entry after a call to the internal nonlinear equation solver (see INLN).

IMON = 1

The current step was successful.

On exit: may be reset to determine subsequent action in D02NBF.

IMON = -2

Integration is to be halted. A return will be made from the integrator to the calling (sub)program with IFAIL = 12.

IMON = -1

Allow the integrator to continue with its own internal strategy. The integrator will try up to three restarts unless IMON is set $\neq -1$ on exit.

IMON = 0

Return to the internal nonlinear equation solver, where the action taken is determined by the value of INLN (see INLN).

IMON = 1

Normal exit to the integrator to continue integration.

IMON = 2

Restart the integration at the current time point. The integrator will restart from order 1 when this option is used. The solution Y, provided by MONITR, will be used for the initial conditions.

IMON = 3

Try to continue with the same step size and order as was to be used before the call to MONITR. HMIN and HMAX may be altered if desired.

IMON = 4

Continue the integration but using a new value of HNEXT and possibly new values of HMIN and HMAX.

12: INLN - INTEGER

Output

On exit: the action to be taken by the internal nonlinear equation solver when MONITR is exited with IMON = 0. By setting INLN = 3 and returning to the integrator, the residual vector is evaluated and placed in the array R, and then MONITR is called again. At present this is the only option available: INLN must not be set to any other value.

13: HMIN – REAL (KIND=nag_wp)

Input/Output

On entry: the minimum step size to be taken on the next step.

On exit: the minimum step size to be used. If this is different from the input value, then IMON must be set to 3 or 4.

14: HMAX – REAL (KIND=nag wp)

Input/Output

On entry: the maximum step size to be taken on the next step.

On exit: the maximum step size to be used. If this is different from the input value, then IMON must be set to 3 or 4. If HMAX is set to zero, no limit is assumed.

15: NOU – INTEGER

Input

On entry: the order of the integrator used on the last step. This is supplied to enable you to carry out interpolation using either of the routines D02XJF or D02XKF.

MONITR must either be a module subprogram USEd by, or declared as EXTERNAL in, the (sub)program from which D02NBF is called. Arguments denoted as *Input* must **not** be changed by this procedure.

19: ITASK – INTEGER

Input

On entry: the task to be performed by the integrator.

ITASK = 1

Normal computation of output values of y(t) at t = TOUT (by overshooting and interpolating).

ITASK = 2

Take one step only and return.

ITASK = 3

Stop at the first internal integration point at or beyond t = TOUT and return.

ITASK = 4

Normal computation of output values of y(t) at t=TOUT but without overshooting t=TCRIT (e.g., see D02MVF). TCRIT must be specified as an option in one of the integrator setup routines before the first call to the integrator, or specified in the optional input routine before a continuation call. TCRIT may be equal to or beyond TOUT, but not before it, in the direction of integration.

ITASK = 5

Take one step only and return, without passing TCRIT (e.g., see D02MVF). TCRIT must be specified as under ITASK = 4.

Constraint: ITASK = 1, 2, 3, 4 or 5.

20: ITRACE – INTEGER

Input

On entry: the level of output that is printed by the integrator. ITRACE may take the value -1, 0, 1, 2 or 3.

ITRACE < -1

-1 is assumed and similarly if ITRACE > 3, then 3 is assumed.

ITRACE = -1

No output is generated.

ITRACE = 0

Only warning messages are printed on the current error message unit (see X04AAF).

ITRACE > 0

Warning messages are printed as above, and on the current advisory message unit (see X04ABF) output is generated which details Jacobian entries, the nonlinear iteration and the time integration. The advisory messages are given in greater detail the larger the value of ITRACE.

21: IFAIL - INTEGER

Input/Output

On entry: IFAIL must be set to 0, -1 or 1. If you are unfamiliar with this argument you should refer to Section 3.4 in How to Use the NAG Library and its Documentation for details.

For environments where it might be inappropriate to halt program execution when an error is detected, the value -1 or 1 is recommended. If the output of error messages is undesirable, then

D02NBF.8 Mark 26

the value 1 is recommended. Otherwise, because for this routine the values of the output arguments may be useful even if IFAIL $\neq 0$ on exit, the recommended value is -1. When the value -1 or 1 is used it is essential to test the value of IFAIL on exit.

On exit: IFAIL = 0 unless the routine detects an error or a warning has been flagged (see Section 6).

6 Error Indicators and Warnings

If on entry IFAIL = 0 or -1, explanatory error messages are output on the current error message unit (as defined by X04AAF).

Errors or warnings detected by the routine:

IFAIL = 1

An illegal input was detected on entry, or after an internal call to MONITR. If ITRACE > -1, then the form of the error will be detailed on the current error message unit (see X04AAF).

IFAIL = 2

The maximum number of steps specified has been taken (see the description of optional inputs in the integrator setup routines and the optional input continuation routine, D02NZF).

IFAIL = 3

With the given values of RTOL and ATOL no further progress can be made across the integration range from the current point T. The components $Y(1), Y(2), \ldots, Y(NEQ)$ contain the computed values of the solution at the current point T.

IFAIL = 4

There were repeated error test failures on an attempted step, before completing the requested task, but the integration was successful as far as T. The problem may have a singularity, or the local error requirements may be inappropriate.

IFAIL = 5

There were repeated convergence test failures on an attempted step, before completing the requested task, but the integration was successful as far as T. This may be caused by an inaccurate Jacobian matrix or one which is incorrectly computed.

IFAIL = 6

Some error weight w_i became zero during the integration (see the description of ITOL). Pure relative error control (ATOL(i) = 0.0) was requested on a variable (the ith) which has now vanished. The integration was successful as far as T.

IFAIL = 7

FCN set its error flag (IRES = 3) continually despite repeated attempts by the integrator to avoid this.

IFAIL = 8

Not used for this integrator.

IFAIL = 9

A singular Jacobian $\frac{\partial r}{\partial y}$ has been encountered. This error exit is unlikely to be taken when solving explicit ordinary differential equations. You should check the problem formulation and Jacobian calculation.

IFAIL = 10

An error occurred during Jacobian formulation or back-substitution (a more detailed error description may be directed to the current error message unit, see X04AAF).

IFAIL = 11

FCN signalled the integrator to halt the integration and return (IRES = 2). Integration was successful as far as T.

IFAIL = 12

MONITR set IMON = -2 and so forced a return but the integration was successful as far as T.

IFAIL = 13

The requested task has been completed, but it is estimated that a small change in RTOL and ATOL is unlikely to produce any change in the computed solution. (Only applies when you are not operating in one step mode, that is when $ITASK \neq 2$ or 5.)

IFAIL = 14

The values of RTOL and ATOL are so small that D02NBF is unable to start the integration.

IFAIL = 15

The linear algebra setup routine D02NSF was not called prior to calling D02NBF.

IFAIL = -99

An unexpected error has been triggered by this routine. Please contact NAG.

See Section 3.9 in How to Use the NAG Library and its Documentation for further information.

IFAIL = -399

Your licence key may have expired or may not have been installed correctly.

See Section 3.8 in How to Use the NAG Library and its Documentation for further information.

IFAIL = -999

Dynamic memory allocation failed.

See Section 3.7 in How to Use the NAG Library and its Documentation for further information.

7 Accuracy

The accuracy of the numerical solution may be controlled by a careful choice of the arguments RTOL and ATOL, and to a much lesser extent by the choice of norm. You are advised to use scalar error control unless the components of the solution are expected to be poorly scaled. For the type of decaying solution typical of many stiff problems, relative error control with a small absolute error threshold will be most appropriate (that is, you are advised to choose ITOL = 1 with ATOL(1) small but positive).

8 Parallelism and Performance

D02NBF is not thread safe and should not be called from a multithreaded user program. Please see Section 3.12.1 in How to Use the NAG Library and its Documentation for more information on thread safety.

D02NBF is threaded by NAG for parallel execution in multithreaded implementations of the NAG Library.

D02NBF.10 Mark 26

D02NBF makes calls to BLAS and/or LAPACK routines, which may be threaded within the vendor library used by this implementation. Consult the documentation for the vendor library for further information.

Please consult the X06 Chapter Introduction for information on how to control and interrogate the OpenMP environment used within this routine. Please also consult the Users' Note for your implementation for any additional implementation-specific information.

9 Further Comments

The cost of computing a solution depends critically on the size of the differential system and to a lesser extent on the degree of stiffness of the problem. For D02NBF the cost is proportional to NEQ³, though for problems which are only mildly nonlinear the cost may be dominated by factors proportional to NEQ² except for very large problems.

In general, you are advised to choose the Backward Differentiation Formula option (setup routine D02NVF) but if efficiency is of great importance and especially if it is suspected that $\frac{\partial g}{\partial y}$ has complex eigenvalues near the imaginary axis for some part of the integration, you should try the BLEND option (setup routine D02NWF).

10 Example

This example solves the well-known stiff Robertson problem

```
a' = -0.04a + 1.0E4bc

b' = 0.04a - 1.0E4bc - 3.0E7b^2

c' = 3.0E7b^2
```

over the range [0,10] with initial conditions a=1.0 and b=c=0.0 using scalar error control (ITOL = 1) and computation of the solution at TOUT = 10.0 with TCRIT (e.g., see D02MVF) set to 10.0 (ITASK = 4). D02NBY is used for MONITR, a BDF integrator (setup routine D02NVF) is used and a modified Newton method is selected. This example illustrates the use of both a numerical and an analytical Jacobian.

10.1 Program Text

```
DO2NBF Example Program Text
    Mark 26 Release. NAG Copyright 2016.
    Module d02nbfe_mod
!
      DO2NBF Example Program Module:
!
             Parameters and User-defined Routines
1
      .. Use Statements ..
      Use nag_library, Only: nag_wp
      .. Implicit None Statement ..
      Implicit None
      .. Accessibility Statements ..
      Private
                                          :: fcn, jac
      Public
      .. Parameters ..
      Real (Kind=nag_wp), Parameter
                                         :: alpha = 0.04_naq_wp
      Real (Kind=nag_wp), Parameter
                                        :: beta = 1.0E4_nag_wp
      Real (Kind=nag_wp), Parameter
                                        :: gamma = 3.0E7_nag_wp
      Real (Kind=nag_wp), Parameter
Real (Kind=nag_wp), Parameter
                                         :: one = 1.0_nag_wp
                                         :: two = 2.0_nag_wp
                                         :: iset = 1, itrace = 0, neq = 3,
      Integer, Parameter, Public
                                            nin = 5, nout = 6
      Integer, Parameter, Public Integer, Parameter, Public
                                         :: nrw = 50 + 4*neq
                                         :: nwkjac = neq*(neq+1)
      Integer, Parameter, Public
                                         :: ldysav = neq
    Contains
```

```
Subroutine fcn(neq,t,y,f,ires)
        .. Scalar Arguments ..
Real (Kind=nag_wp), Intent (In) :: t
!
        Integer, Intent (Inout) :: ires
        Integer, Intent (In)
                                         :: neq
        .. Array Arguments .. Real (Kind=nag_wp), Intent (Out) :: f(neq) Real (Kind=nag_wp), Intent (In) :: y(neq)
!
!
        .. Executable Statements ..
        f(1) = -alpha*y(1) + beta*y(2)*y(3)
        f(2) = alpha*y(1) - beta*y(2)*y(3) - gamma*y(2)*y(2)
        f(3) = gamma*y(2)*y(2)
        Return
      End Subroutine fcn
      Subroutine jac(neq,t,y,h,d,p)
         .. Scalar Arguments ..
        Real (Kind=nag_wp), Intent (In) :: d, h, t
        Integer, Intent (In) :: neq
        .. Array Arguments ..

Real (Kind=nag_wp), Intent (Inout) :: p(neq,neq)
        Real (Kind=nag_wp), Intent (In) :: y(neq)
        .. Local Scalars ..
!
        Real (Kind=nag_wp)
!
        .. Executable Statements ..
        hxd = h*d
        p(1,1) = one - hxd*(-alpha)
        p(1,2) = -hxd*(beta*y(3))
        p(1,3) = -hxd*(beta*y(2))
        p(2,1) = -hxd*(alpha)
        p(2,2) = one - hxd*(-beta*y(3)-two*gamma*y(2))
        p(2,3) = -hxd*(-beta*y(2))
        Do not need to set P(3,1) since Jacobian preset to zero
        P(3,1) = - HXD*(0.0E0)
        p(3,2) = -hxd*(two*gamma*y(2))
        p(3,3) = one - hxd*(0.0_nag_wp)
        Return
      End Subroutine jac
    End Module d02nbfe_mod
    Program d02nbfe
1
      DO2NBF Example Main Program
      .. Use Statements ..
      Use nag_library, Only: d02nbf, d02nby, d02nbz, d02nsf, d02nvf, d02nyf,
                               nag_wp, x04abf
      Use d02nbfe_mod, Only: fcn, iset, itrace, jac, ldysav, neq, nin, nout,
                               nrw, nwkjac
      .. Implicit None Statement ..
!
      Implicit None
      .. Local Scalars ..
      Real (Kind=nag_wp)
                                          :: h, h0, hmax, hmin, hu, t, tcrit,
                                             tcur, tinit, tolsf, tout
                                          :: i, icase, ifail, imxer, itask, itol, &
   maxord, maxstp, mxhnil, niter, nje, &
      Integer
                                             nq, nqu, nre, nst, outchn, sdysav
     Logical
                                          :: petzld
      .. Local Arrays ..
      Real (Kind=nag_wp), Allocatable :: atol(:), rtol(:), rwork(:),
                                             wkjac(:), y(:), ydot(:), yinit(:), &
                                             ysav(:,:)
      Real (Kind=nag_wp)
                                          :: con(6)
                                          :: inform(23)
      Integer
      Logical, Allocatable
                                          :: algequ(:)
      .. Executable Statements ..
      Write (nout,*) 'DO2NBF Example Program Results'
      Skip heading in data file
      Read (nin,*)
```

D02NBF.12 Mark 26

```
Read (nin,*) maxord, maxstp, mxhnil
      sdysav = maxord + 1
      Allocate (atol(neq),rtol(neq),rwork(nrw),wkjac(nwkjac),y(neq),
                                                                                  &
       yinit(neq),ydot(neq),ysav(ldysav,sdysav),algequ(neq))
      outchn = nout
      Call x04abf(iset,outchn)
      Read (nin,*) petzld
Read (nin,*) hmin, hmax, h0
      Read (nin,*) tinit, tout
      Read (nin,*) itol
      Read (nin,*) yinit(1:neq)
      Read (nin,*) rtol(1), atol(1)
!
      Two cases. In both cases:
1
                 integrate to tout without passing tout;
!
                 use B.D.F formulae with a Newton method;
                 use default values for the array con;
1
!
                 use scalar tolerances;
1
                 use NAG dummy routine DO2NBY in place of MONITR subroutine.
      con(1:6) = 0.0_nag_wp
      tcrit = tout
      itask = 4
cases: Do icase = 1, 2
        t = tinit
        y(1:neq) = yinit(1:neq)
!
        ifail: behaviour on error exit
!
               =0 for hard exit, =1 for quiet-soft, =-1 for noisy-soft
        ifail = 0
        Call d02nvf(neq,sdysav,maxord,'Newton',petzld,con,tcrit,hmin,hmax,h0, &
          maxstp,mxhnil,'Average-L2',rwork,ifail)
        Write (nout,*)
        ifail = 0
        Select Case (icase)
        Case (1)
!
          First case. The Jacobian is evaluated internally.
          Call d02nsf(neq,neq,'Numerical',nwkjac,rwork,ifail)
          Write (nout,*) ' Numerical Jacobian'
        Case (2)
!
          Second case. The Jacobian is evaluated by jac.
          Call d02nsf(neq,neq,'Analytical',nwkjac,rwork,ifail)
          Write (nout,*) ' Analytic Jacobian'
        End Select
        Write (nout, 99993)(i, i=1, neq)
        Write (nout,99999) t, y(1:neq)
        Soft fail and error messages only
        ifail = -1
        Select Case (icase)
        Case (1)
          Call d02nbf(neq,ldysav,t,tout,y,ydot,rwork,rtol,atol,itol,inform,
            fcn,ysav,sdysav,d02nbz,wkjac,nwkjac,d02nby,itask,itrace,ifail)
        Case (2)
          Call d02nbf(neq,ldysav,t,tout,y,ydot,rwork,rtol,atol,itol,inform,
            fcn,ysav,sdysav,jac,wkjac,nwkjac,d02nby,itask,itrace,ifail)
        End Select
        If (ifail==0) Then
          Write (nout,99999) t, y(1:neq)
          ifail = 0
          Call d02nyf(neq,neq,hu,h,tcur,tolsf,rwork,nst,nre,nje,nqu,nq,niter, &
            imxer,algequ,inform,ifail)
```

```
Write (nout,*)
            Write (nout,99997) hu, h, tcur
            Write (nout,99996) nst, nre, nje
            Write (nout,99995) nqu, nq, niter
            Write (nout, 99994) ' Max Err Comp = ', imxer
            Write (nout,*)
         Else
            Write (nout,*)
            Write (nout,99998) 'Exit DO2NBF with IFAIL = ', ifail, ' and T = ', &
         End If
       End Do cases
99999 Format (1X,F8.3,3(F13.5,2X))
99998 Format (1X,A,I2,A,E12.5)
99997 Format (1X,' HUSED = ',E12.5,' HNEXT = ',E12.5,' TCUR = ',E12.5)
99996 Format (1X,' NST = ',I6,' NRE = ',I6,' NJE = ',I6)
99995 Format (1X,' NQU = ',I6,' NQ = ',I6,' NITER = ',I6)
99994 Format (1X,A,I4)
99993 Format (/,1X,' X ',3('
                                               Y(',I1,') '))
    End Program d02nbfe
```

10.2 Program Data

```
D02NBF Example Program Data
5 200 5 : maxord, maxstp, mxhnil
.FALSE. : petzld
1.0E-10 10.0 0.0 : hmin, hmax, h0
0.0 10.0 : t, tout
1 : itol
1.0 0.0 0.0 : y
1.0E-4 1.0E-7 : rtol, atol
```

10.3 Program Results

DO2NBF Example Program Results

Numerical Jacobian

Analytic Jacobian

```
X Y(1) Y(2) Y(3)

0.000 1.00000 0.00000 0.00000

10.000 0.84136 0.00002 0.15863


HUSED = 0.51867E+00 HNEXT = 0.51867E+00 TCUR = 0.10000E+02

NST = 55 NRE = 81 NJE = 17

NQU = 3 NQ = 3 NITER = 79

Max Err Comp = 3
```

D02NBF.14 Mark 26

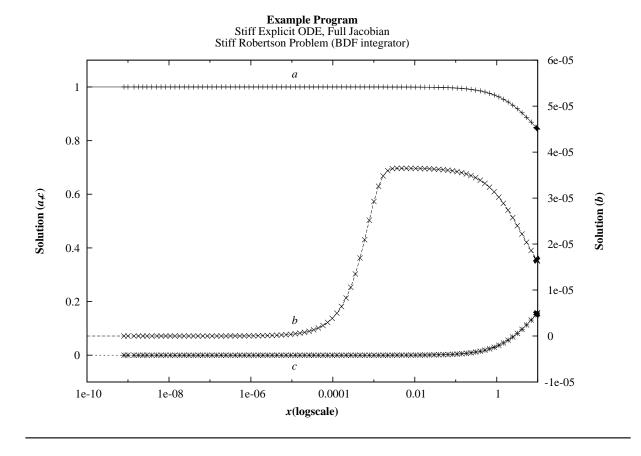

Mark 26 D02NBF.15 (last)