

NAG Library Function Document

nag_fresnel_c (s20adc)

1 Purpose

nag_fresnel_c (s20adc) returns a value for the Fresnel integral $C(x)$.

2 Specification

```
#include <nag.h>
#include <nags.h>
double nag_fresnel_c (double x)
```

3 Description

nag_fresnel_c (s20adc) evaluates an approximation to the Fresnel integral

$$C(x) = \int_0^x \cos\left(\frac{\pi}{2}t^2\right) dt.$$

Note: $C(x) = -C(-x)$, so the approximation need only consider $x \geq 0.0$.

The function is based on three Chebyshev expansions:

For $0 < x \leq 3$,

$$C(x) = x \sum_{r=0} a_r T_r(t), \quad \text{with } t = 2\left(\frac{x}{3}\right)^4 - 1.$$

For $x > 3$,

$$C(x) = \frac{1}{2} + \frac{f(x)}{x} \sin\left(\frac{\pi}{2}x^2\right) - \frac{g(x)}{x^3} \cos\left(\frac{\pi}{2}x^2\right),$$

where $f(x) = \sum_{r=0} b_r T_r(t)$,

and $g(x) = \sum_{r=0} c_r T_r(t)$,

with $t = 2\left(\frac{3}{x}\right)^4 - 1$.

For small x , $C(x) \simeq x$. This approximation is used when x is sufficiently small for the result to be correct to **machine precision**.

For large x , $f(x) \simeq \frac{1}{\pi}$ and $g(x) \simeq \frac{1}{\pi^2}$. Therefore for moderately large x , when $\frac{1}{\pi^2 x^3}$ is negligible compared with $\frac{1}{2}$, the second term in the approximation for $x > 3$ may be dropped. For very large x , when $\frac{1}{\pi x}$ becomes negligible, $C(x) \simeq \frac{1}{2}$. However there will be considerable difficulties in calculating $\sin\left(\frac{\pi}{2}x^2\right)$ accurately before this final limiting value can be used. Since $\sin\left(\frac{\pi}{2}x^2\right)$ is periodic, its value is essentially determined by the fractional part of x^2 . If $x^2 = N + \theta$, where N is an integer and $0 \leq \theta < 1$, then $\sin\left(\frac{\pi}{2}x^2\right)$ depends on θ and on N modulo 4. By exploiting this fact, it is possible to retain some significance in the calculation of $\sin\left(\frac{\pi}{2}x^2\right)$ either all the way to the very large x limit, or at least until the integer part of $\frac{x}{2}$ is equal to the maximum integer allowed on the machine.

4 References

Abramowitz M and Stegun I A (1972) *Handbook of Mathematical Functions* (3rd Edition) Dover Publications

5 Arguments

1: x – double

Input

On entry: the argument x of the function.

6 Error Indicators and Warnings

None.

7 Accuracy

Let δ and ϵ be the relative errors in the argument and result respectively.

If δ is somewhat larger than the *machine precision* (i.e. if δ is due to data errors etc.), then ϵ and δ are approximately related by:

$$\epsilon \simeq \left| \frac{x \cos\left(\frac{\pi}{2}x^2\right)}{C(x)} \right| \delta.$$

Figure 1 shows the behaviour of the error amplification factor $\left| \frac{x \cos\left(\frac{\pi}{2}x^2\right)}{C(x)} \right|$.

However, if δ is of the same order as the *machine precision*, then rounding errors could make ϵ slightly larger than the above relation predicts.

For small x , $\epsilon \simeq \delta$ and there is no amplification of relative error.

For moderately large values of x ,

$$|\epsilon| \simeq \left| 2x \cos\left(\frac{\pi}{2}x^2\right) \right| |\delta|$$

and the result will be subject to increasingly large amplification of errors. However the above relation breaks down for large values of x (i.e., when $\frac{1}{x^2}$ is of the order of the *machine precision*); in this region

the relative error in the result is essentially bounded by $\frac{2}{\pi x}$.

Hence the effects of error amplification are limited and at worst the relative error loss should not exceed half the possible number of significant figures.

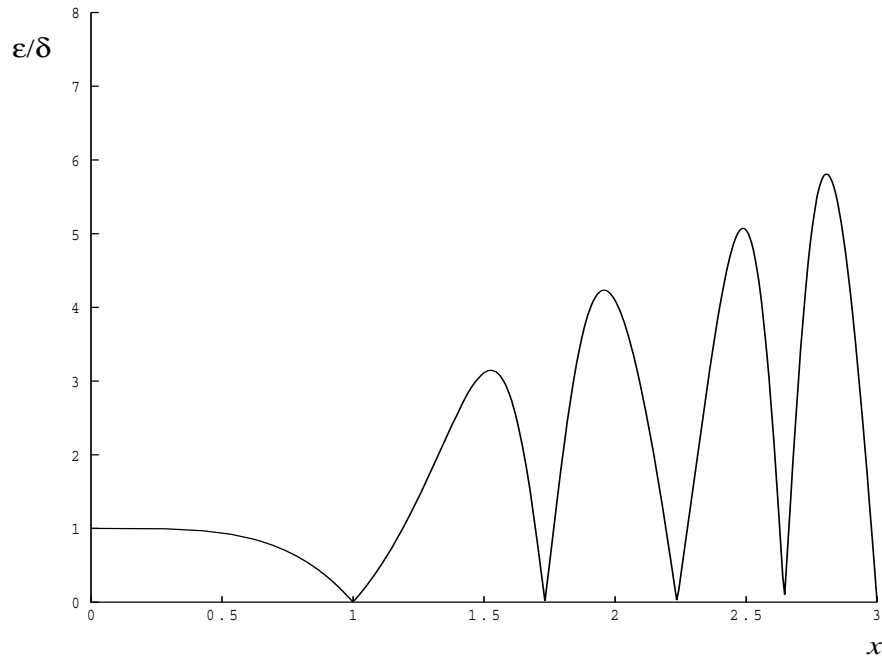


Figure 1

8 Parallelism and Performance

`nag_fresnel_c` (s20adc) is not threaded in any implementation.

9 Further Comments

None.

10 Example

This example reads values of the argument x from a file, evaluates the function at each value of x and prints the results.

10.1 Program Text

```

/* nag_fresnel_c (s20adc) Example Program.
 *
 * NAGPRODCODE Version.
 *
 * Copyright 2016 Numerical Algorithms Group.
 *
 * Mark 26, 2016.
 */

#include <nag.h>
#include <stdio.h>
#include <nag_stdlib.h>
#include <nags.h>

int main(void)
{
    Integer exit_status = 0;
    double x, y;

    /* Skip heading in data file */
#ifdef _WIN32
    scanf_s("%*[\n]");
#else

```

```

    scanf("%*[^\\n]");
#endif
    printf("nag_fresnel_c (s20adc) Example Program Results\\n");
    printf("      x              y\\n");
#ifdef _WIN32
    while (scanf_s("%lf", &x) != EOF)
#else
    while (scanf("%lf", &x) != EOF)
#endif
    {
        /* nag_fresnel_c (s20adc).
         * Fresnel integral C(x)
         */
        y = nag_fresnel_c(x);
        printf("%12.3e%12.3e\\n", x, y);
    }

    return exit_status;
}

```

10.2 Program Data

```

nag_fresnel_c (s20adc) Example Program Data
      0.0
      0.5
      1.0
      2.0
      4.0
      5.0
      6.0
      8.0
     10.0
     -1.0
    1000.0

```

10.3 Program Results

```

nag_fresnel_c (s20adc) Example Program Results
      x              y
  0.000e+00   0.000e+00
  5.000e-01   4.923e-01
  1.000e+00   7.799e-01
  2.000e+00   4.883e-01
  4.000e+00   4.984e-01
  5.000e+00   5.636e-01
  6.000e+00   4.995e-01
  8.000e+00   4.998e-01
  1.000e+01   4.999e-01
 -1.000e+00  -7.799e-01
  1.000e+03   5.000e-01

```

