

# NAG Library Routine Document

## S20ARF

**Note:** before using this routine, please read the Users' Note for your implementation to check the interpretation of *bold italicised* terms and other implementation-dependent details.

### 1 Purpose

S20ARF returns an array of values for the Fresnel integral  $C(x)$ .

### 2 Specification

```
SUBROUTINE S20ARF (N, X, F, IFAIL)
  INTEGER          N, IFAIL
  REAL (KIND=nag_wp) X(N), F(N)
```

### 3 Description

S20ARF evaluates an approximation to the Fresnel integral

$$C(x_i) = \int_0^{x_i} \cos\left(\frac{\pi}{2}t^2\right) dt$$

for an array of arguments  $x_i$ , for  $i = 1, 2, \dots, n$ .

**Note:**  $C(x) = -C(-x)$ , so the approximation need only consider  $x \geq 0.0$ .

The routine is based on three Chebyshev expansions:

For  $0 < x \leq 3$ ,

$$C(x) = x \sum_{r=0} a_r T_r(t), \quad \text{with } t = 2\left(\frac{x}{3}\right)^4 - 1.$$

For  $x > 3$ ,

$$C(x) = \frac{1}{2} + \frac{f(x)}{x} \sin\left(\frac{\pi}{2}x^2\right) - \frac{g(x)}{x^3} \cos\left(\frac{\pi}{2}x^2\right),$$

where  $f(x) = \sum_{r=0} b_r T_r(t)$ ,

and  $g(x) = \sum_{r=0} c_r T_r(t)$ ,

with  $t = 2\left(\frac{3}{x}\right)^4 - 1$ .

For small  $x$ ,  $C(x) \simeq x$ . This approximation is used when  $x$  is sufficiently small for the result to be correct to *machine precision*.

For large  $x$ ,  $f(x) \simeq \frac{1}{\pi}$  and  $g(x) \simeq \frac{1}{\pi^2}$ . Therefore for moderately large  $x$ , when  $\frac{1}{\pi^2 x^3}$  is negligible compared with  $\frac{1}{2}$ , the second term in the approximation for  $x > 3$  may be dropped. For very large  $x$ , when  $\frac{1}{\pi x}$  becomes negligible,  $C(x) \simeq \frac{1}{2}$ . However there will be considerable difficulties in calculating  $\sin\left(\frac{\pi}{2}x^2\right)$  accurately before this final limiting value can be used. Since  $\sin\left(\frac{\pi}{2}x^2\right)$  is periodic, its value is essentially determined by the fractional part of  $x^2$ . If  $x^2 = N + \theta$ , where  $N$  is an integer and  $0 \leq \theta < 1$ , then  $\sin\left(\frac{\pi}{2}x^2\right)$  depends on  $\theta$  and on  $N$  modulo 4. By exploiting this fact, it is possible to retain some

significance in the calculation of  $\sin\left(\frac{\pi}{2}x^2\right)$  either all the way to the very large  $x$  limit, or at least until the integer part of  $\frac{x}{2}$  is equal to the maximum integer allowed on the machine.

## 4 References

Abramowitz M and Stegun I A (1972) *Handbook of Mathematical Functions* (3rd Edition) Dover Publications

## 5 Arguments

- 1: N – INTEGER *Input*  
*On entry:*  $n$ , the number of points.  
*Constraint:*  $N \geq 0$ .
- 2: X(N) – REAL (KIND=nag\_wp) array *Input*  
*On entry:* the argument  $x_i$  of the function, for  $i = 1, 2, \dots, N$ .
- 3: F(N) – REAL (KIND=nag\_wp) array *Output*  
*On exit:*  $C(x_i)$ , the function values.
- 4: IFAIL – INTEGER *Input/Output*  
*On entry:* IFAIL must be set to 0, -1 or 1. If you are unfamiliar with this argument you should refer to Section 3.4 in How to Use the NAG Library and its Documentation for details.  
 For environments where it might be inappropriate to halt program execution when an error is detected, the value -1 or 1 is recommended. If the output of error messages is undesirable, then the value 1 is recommended. Otherwise, if you are not familiar with this argument, the recommended value is 0. **When the value -1 or 1 is used it is essential to test the value of IFAIL on exit.**  
*On exit:* IFAIL = 0 unless the routine detects an error or a warning has been flagged (see Section 6).

## 6 Error Indicators and Warnings

If on entry IFAIL = 0 or -1, explanatory error messages are output on the current error message unit (as defined by X04AAF).

Errors or warnings detected by the routine:

IFAIL = 1

*On entry,*  $N = \langle value \rangle$ .  
*Constraint:*  $N \geq 0$ .

IFAIL = -99

An unexpected error has been triggered by this routine. Please contact NAG.

See Section 3.9 in How to Use the NAG Library and its Documentation for further information.

IFAIL = -399

Your licence key may have expired or may not have been installed correctly.

See Section 3.8 in How to Use the NAG Library and its Documentation for further information.

IFAIL = -999

Dynamic memory allocation failed.

See Section 3.7 in How to Use the NAG Library and its Documentation for further information.

## 7 Accuracy

Let  $\delta$  and  $\epsilon$  be the relative errors in the argument and result respectively.

If  $\delta$  is somewhat larger than the *machine precision* (i.e. if  $\delta$  is due to data errors etc.), then  $\epsilon$  and  $\delta$  are approximately related by:

$$\epsilon \simeq \left| \frac{x \cos\left(\frac{\pi}{2}x^2\right)}{C(x)} \right| \delta.$$

Figure 1 shows the behaviour of the error amplification factor  $\left| \frac{x \cos\left(\frac{\pi}{2}x^2\right)}{C(x)} \right|$ .

However, if  $\delta$  is of the same order as the *machine precision*, then rounding errors could make  $\epsilon$  slightly larger than the above relation predicts.

For small  $x$ ,  $\epsilon \simeq \delta$  and there is no amplification of relative error.

For moderately large values of  $x$ ,

$$\epsilon \simeq \left| 2x \cos\left(\frac{\pi}{2}x^2\right) \right| \delta$$

and the result will be subject to increasingly large amplification of errors. However the above relation breaks down for large values of  $x$  (i.e., when  $\frac{1}{x^2}$  is of the order of the *machine precision*); in this region the relative error in the result is essentially bounded by  $\frac{2}{\pi x}$ .

Hence the effects of error amplification are limited and at worst the relative error loss should not exceed half the possible number of significant figures.

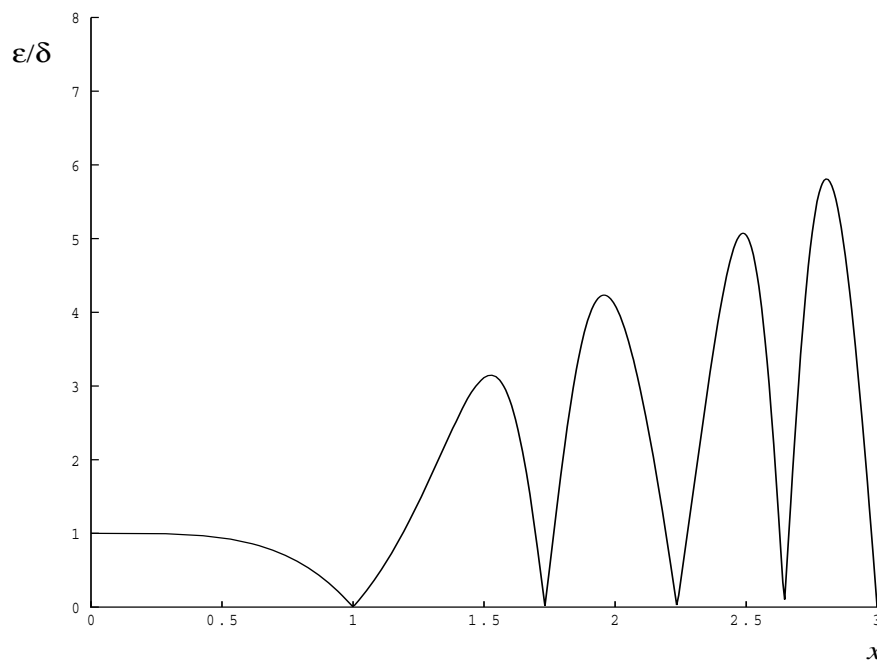


Figure 1

## 8 Parallelism and Performance

S20ARF is not threaded in any implementation.

## 9 Further Comments

None.

## 10 Example

This example reads values of X from a file, evaluates the function at each value of  $x_i$  and prints the results.

### 10.1 Program Text

```

Program s20arfe

!      S20ARF Example Program Text

!      Mark 26 Release. NAG Copyright 2016.

!      .. Use Statements ..
      Use nag_library, Only: nag_wp, s20arf
!      .. Implicit None Statement ..
      Implicit None
!      .. Parameters ..
      Integer, Parameter          :: nin = 5, nout = 6
!      .. Local Scalars ..
      Integer                    :: i, ifail, n
!      .. Local Arrays ..
      Real (Kind=nag_wp), Allocatable :: f(:), x(:)
!      .. Executable Statements ..
      Write (nout,*) 'S20ARF Example Program Results'

!      Skip heading in data file
      Read (nin,*)

      Write (nout,*)
      Write (nout,*) '      X      F'
      Write (nout,*)

      Read (nin,*) n

      Allocate (x(n),f(n))

      Read (nin,*) x(1:n)

      ifail = 0
      Call s20arf(n,x,f,ifail)

      Do i = 1, n
         Write (nout,99999) x(i), f(i)
      End Do

99999 Format (1X,1P,2E12.3)
End Program s20arfe

```

### 10.2 Program Data

S20ARF Example Program Data

11

0.0 0.5 1.0 2.0 4.0 5.0 6.0 8.0 10.0 -1.0 1000.0

**10.3 Program Results**

S20ARF Example Program Results

X	F
0.000E+00	0.000E+00
5.000E-01	4.923E-01
1.000E+00	7.799E-01
2.000E+00	4.883E-01
4.000E+00	4.984E-01
5.000E+00	5.636E-01
6.000E+00	4.995E-01
8.000E+00	4.998E-01
1.000E+01	4.999E-01
-1.000E+00	-7.799E-01
1.000E+03	5.000E-01

---