# NAG Library Chapter Introduction

# F08 – Least Squares and Eigenvalue Problems (LAPACK)

# Contents

1	Sco	pe of the Chapter	. 3
2	Bac	ckground to the Problems	. 3
	2.1	Linear Least Squares Problems	. 3
		Orthogonal Factorizations and Least Squares Problems	
		2.2.1 QR factorization	
		2.2.2 LQ factorization	
		2.2.4 Complete orthogonal factorization	
		<ul><li>2.2.5 Updating a QR factorization.</li><li>2.2.6 Other factorizations.</li></ul>	
	2.3	The Singular Value Decomposition	
	2.3	The Singular Value Decomposition and Least Squares Problems	
	2.5	Generalized Linear Least Squares Problems	
	2.6		. 0
		Generalized Linear Least Squares Problems	. 8
		2.6.1 Generalized <i>QR</i> Factorization.	
		<ul><li>2.6.2 Generalized <i>RQ</i> Factorization.</li><li>2.6.3 Generalized Singular Value Decomposition (GSVD)</li></ul>	
		2.6.4 The Full CS Decomposition of Orthogonal Matrices	
	2.7	Symmetric Eigenvalue Problems	13
	2.8	Generalized Symmetric-definite Eigenvalue Problems	14
		Packed Storage for Symmetric Matrices	
		Band Matrices	
		Nonsymmetric Eigenvalue Problems	
		2 Generalized Nonsymmetric Eigenvalue Problem	
		3 The Sylvester Equation and the Generalized Sylvester Equation	
	2.14	Error and Perturbation Bounds and Condition Numbers	
		2.14.1 Least squares problems2.14.2 The singular value decomposition	
		2.14.3 The symmetric eigenproblem	20
		<ul><li>2.14.4 The generalized symmetric-definite eigenproblem.</li><li>2.14.5 The nonsymmetric eigenproblem</li></ul>	21
		2.14.6 Balancing and condition for the nonsymmetric eigenproblem	
		2.14.7 The generalized nonsymmetric eigenvalue problem	
		2.14.8 Balancing the generalized eigenvalue problem2.14.9 Other problems	
	2.15		

3	Rec	commendations on Choice and Use of Available Routines	24
	3.1	Available Routines	24
		3.1.1 Driver routines	24
		3.1.1.1 Linear least squares problems (LLS)	
		3.1.1.2 Generalized linear least squares problems (LSE and GLM)	
		3.1.1.3 Symmetric eigenvalue problems (SEP)	
		3.1.1.4 Nonsymmetric eigenvalue problem (NEP)	
		3.1.1.5 Singular value decomposition (SVD).	
		<ul> <li>3.1.1.6 Generalized symmetric definite eigenvalue problems (GSEP)</li> <li>3.1.1.7 Generalized nonsymmetric eigenvalue problem (GNEP)</li> </ul>	
		<ul><li>3.1.1.7 Generalized nonsymmetric eigenvalue problem (GNEP)</li><li>3.1.1.8 Generalized singular value decomposition (GSVD)</li></ul>	
		3.1.2 Computational routines	
		3.1.2.1 Orthogonal factorizations	
		3.1.2.2 Generalized orthogonal factorizations	
		3.1.2.3 Singular value problems.	
		3.1.2.4 Generalized singular value decomposition	
		3.1.2.5 Symmetric eigenvalue problems.	
		3.1.2.6 Generalized symmetric-definite eigenvalue problems	
		3.1.2.7 Nonsymmetric eigenvalue problems	
		3.1.2.8 Generalized nonsymmetric eigenvalue problems	
		3.1.2.9 The Sylvester equation and the generalized Sylvester equation	
	3.2	NAG Names and LAPACK Names	35
	3.3	Matrix Storage Schemes	36
		3.3.1 Conventional storage	37
		3.3.2 Packed storage	37
		3.3.3 Band storage	
		3.3.4 Tridiagonal and bidiagonal matrices	
		3.3.5 Real diagonal elements of complex matrices	
		3.3.6 Representation of orthogonal or unitary matrices	37
	3.4	Argument Conventions	38
		3.4.1 Option Arguments	
		3.4.2 Problem dimensions	
		3.4.3 Length of work arrays	
		3.4.4 Error-handling and the Diagnostic Argument INFO	38
	3.5	Normalizing Output Vectors	39
4	Dec	cision Trees	40
	41	General Purpose Routines (eigenvalues and eigenvectors)	40
	4.2	General Purpose Routines (singular value decomposition)	45
5	Fui	nctionality Index	45
6	Au	xiliary Routines Associated with Library Routine Arguments	52
7		utines Withdrawn or Scheduled for Withdrawal	
8	Rei	ferences	53

# **1** Scope of the Chapter

This chapter provides routines for the solution of linear least squares problems, eigenvalue problems and singular value problems, as well as associated computations. It provides routines for:

solution of linear least squares problems solution of symmetric eigenvalue problems solution of nonsymmetric eigenvalue problems solution of singular value problems solution of generalized linear least squares problems solution of generalized symmetric-definite eigenvalue problems solution of generalized nonsymmetric eigenvalue problems solution of generalized singular value problems matrix factorizations associated with the above problems estimating condition numbers of eigenvalue and eigenvector problems estimating the numerical rank of a matrix solution of the Sylvester matrix equation

Routines are provided for both *real* and *complex* data.

For a general introduction to the solution of linear least squares problems, you should turn first to Chapter F04. The decision trees, at the end of Chapter F04, direct you to the most appropriate routines in Chapters F04 or F08. Chapters F04 and F08 contain *Black Box* (or *driver*) routines which enable standard linear least squares problems to be solved by a call to a single routine.

For a general introduction to eigenvalue and singular value problems, you should turn first to Chapter F02. The decision trees, at the end of Chapter F02, direct you to the most appropriate routines in Chapters F02 or F08. Chapters F02 and F08 contain *Black Box* (or *driver*) routines which enable standard types of problem to be solved by a call to a single routine. Often routines in Chapter F02 call Chapter F08 routines to perform the necessary computational tasks.

The routines in this chapter (Chapter F08) handle only *dense*, *band*, *tridiagonal* and *Hessenberg* matrices (not matrices with more specialised structures, or general sparse matrices). The tables in Section 3 and the decision trees in Section 4 direct you to the most appropriate routines in Chapter F08.

The routines in this chapter have all been derived from the LAPACK project (see Anderson *et al.* (1999)). They have been designed to be efficient on a wide range of high-performance computers, without compromising efficiency on conventional serial machines.

# **2** Background to the Problems

This section is only a brief introduction to the numerical solution of linear least squares problems, eigenvalue and singular value problems. Consult a standard textbook for a more thorough discussion, for example Golub and Van Loan (2012).

## 2.1 Linear Least Squares Problems

The linear least squares problem is

$$\underset{x}{\text{minimize}} \|b - Ax\|_2, \tag{1}$$

where A is an m by n matrix, b is a given m element vector and x is an n-element solution vector.

In the most usual case  $m \ge n$  and rank(A) = n, so that A has *full rank* and in this case the solution to problem (1) is unique; the problem is also referred to as finding a *least squares solution* to an *overdetermined* system of linear equations.

When m < n and  $\operatorname{rank}(A) = m$ , there are an infinite number of solutions x which exactly satisfy b - Ax = 0. In this case it is often useful to find the unique solution x which minimizes  $||x||_2$ , and the problem is referred to as finding a *minimum norm solution* to an *underdetermined* system of linear equations.

In the general case when we may have rank(A) < min(m, n) – in other words, A may be *rank-deficient* – we seek the *minimum norm least squares* solution x which minimizes both  $||x||_2$  and  $||b - Ax||_2$ .

This chapter (Chapter F08) contains driver routines to solve these problems with a single call, as well as computational routines that can be combined with routines in Chapter F07 to solve these linear least squares problems. Chapter F04 also contains Black Box routines to solve these linear least squares problems in standard cases. The next two sections discuss the factorizations that can be used in the solution of linear least squares problems.

## 2.2 Orthogonal Factorizations and Least Squares Problems

A number of routines are provided for factorizing a general rectangular m by n matrix A, as the product of an *orthogonal* matrix (*unitary* if complex) and a *triangular* (or possibly trapezoidal) matrix.

A real matrix Q is *orthogonal* if  $Q^{T}Q = I$ ; a complex matrix Q is *unitary* if  $Q^{H}Q = I$ . Orthogonal or unitary matrices have the important property that they leave the 2-norm of a vector invariant, so that

$$||x||_2 = ||Qx||_2,$$

if Q is orthogonal or unitary. They usually help to maintain numerical stability because they do not amplify rounding errors.

Orthogonal factorizations are used in the solution of linear least squares problems. They may also be used to perform preliminary steps in the solution of eigenvalue or singular value problems, and are useful tools in the solution of a number of other problems.

### 2.2.1 QR factorization

The most common, and best known, of the factorizations is the QR factorization given by

$$A = Q\binom{R}{0}, \quad \text{ if } m \ge n,$$

where R is an n by n upper triangular matrix and Q is an m by m orthogonal (or unitary) matrix. If A is of full rank n, then R is nonsingular. It is sometimes convenient to write the factorization as

$$A = (Q_1 Q_2) \begin{pmatrix} R \\ 0 \end{pmatrix}$$

which reduces to

$$A = Q_1 R,$$

where  $Q_1$  consists of the first n columns of Q, and  $Q_2$  the remaining m - n columns.

If m < n, R is trapezoidal, and the factorization can be written

$$A = Q(R_1 R_2), \quad \text{if } m < n,$$

where  $R_1$  is upper triangular and  $R_2$  is rectangular.

The QR factorization can be used to solve the linear least squares problem (1) when  $m \ge n$  and A is of full rank, since

$$||b - Ax||_2 = ||Q^{\mathsf{T}}b - Q^{\mathsf{T}}Ax||_2 = ||\begin{pmatrix} c_1 - Rx \\ c_2 \end{pmatrix}||_2,$$

where

$$c \equiv \begin{pmatrix} c_1 \\ c_2 \end{pmatrix} = \begin{pmatrix} Q_1^{\mathrm{T}}b \\ Q_2^{\mathrm{T}}b \end{pmatrix} = Q^{\mathrm{T}}b;$$

and  $c_1$  is an *n*-element vector. Then x is the solution of the upper triangular system

$$Rx = c_1.$$

The residual vector r is given by

$$r = b - Ax = Q\begin{pmatrix} 0\\c_2 \end{pmatrix}.$$

The residual sum of squares  $||r||_2^2$  may be computed without forming r explicitly, since

$$||r||_2 = ||b - Ax||_2 = ||c_2||_2.$$

#### 2.2.2 LQ factorization

The LQ factorization is given by

$$A = (L \quad 0)Q = (L \quad 0)\begin{pmatrix} Q_1\\Q_2 \end{pmatrix} = LQ_1, \quad \text{if } m \le n,$$

where L is m by m lower triangular, Q is n by n orthogonal (or unitary),  $Q_1$  consists of the first m rows of Q, and  $Q_2$  the remaining n - m rows.

The LQ factorization of A is essentially the same as the QR factorization of  $A^{T}$  ( $A^{H}$  if A is complex), since

$$A = (L \quad 0)Q \Leftrightarrow A^{\mathsf{T}} = Q^{\mathsf{T}} \begin{pmatrix} L^{\mathsf{T}} \\ 0 \end{pmatrix}.$$

The LQ factorization may be used to find a minimum norm solution of an underdetermined system of linear equations Ax = b where A is m by n with m < n and has rank m. The solution is given by

$$x = Q^{\mathsf{T}} \left( \begin{array}{c} L^{-1}b\\ 0 \end{array} \right).$$

#### 2.2.3 QR factorization with column pivoting

To solve a linear least squares problem (1) when A is not of full rank, or the rank of A is in doubt, we can perform either a QR factorization with column pivoting or a singular value decomposition.

The QR factorization with column pivoting is given by

$$A = Q\binom{R}{0}P^{\mathsf{T}}, \quad m \ge n,$$

where Q and R are as before and P is a (real) permutation matrix, chosen (in general) so that

$$|r_{11}| \ge |r_{22}| \ge \cdots \ge |r_{nn}|$$

and moreover, for each k,

$$|r_{kk}| \ge ||R_{k:j,j}||_2, \quad j = k+1, \dots, n.$$

If we put

$$R = \begin{pmatrix} R_{11} & R_{12} \\ 0 & R_{22} \end{pmatrix}$$

where  $R_{11}$  is the leading k by k upper triangular sub-matrix of R then, in exact arithmetic, if rank(A) = k, the whole of the sub-matrix  $R_{22}$  in rows and columns k + 1 to n would be zero. In numerical computation, the aim must be to determine an index k, such that the leading sub-matrix  $R_{11}$ 

is well-conditioned, and  $R_{22}$  is negligible, so that

$$R = \begin{pmatrix} R_{11} & R_{12} \\ 0 & R_{22} \end{pmatrix} \simeq \begin{pmatrix} R_{11} & R_{12} \\ 0 & 0 \end{pmatrix}.$$

Then k is the effective rank of A. See Golub and Van Loan (2012) for a further discussion of numerical rank determination.

The so-called basic solution to the linear least squares problem (1) can be obtained from this factorization as

$$x = P\left(\begin{array}{c} R_{11}^{-1}\hat{c}_1\\ 0 \end{array}\right),$$

where  $\hat{c}_1$  consists of just the first k elements of  $c = Q^T b$ .

### 2.2.4 Complete orthogonal factorization

The QR factorization with column pivoting does not enable us to compute a *minimum norm* solution to a rank-deficient linear least squares problem, unless  $R_{12} = 0$ . However, by applying for further orthogonal (or unitary) transformations from the right to the upper trapezoidal matrix  $\begin{pmatrix} R_{11} & R_{12} \end{pmatrix}$ ,  $R_{12}$  can be eliminated:

$$(R_{11} \quad R_{12})Z = (T_{11} \quad 0).$$

This gives the complete orthogonal factorization

$$\mathbf{AP} = Q \begin{pmatrix} T_{11} & 0 \\ 0 & 0 \end{pmatrix} Z^{\mathsf{T}}$$

from which the minimum norm solution can be obtained as

$$x = PZ \begin{pmatrix} T_{11}^{-1} & \hat{c}_1 \\ 0 & - \end{pmatrix}.$$

### 2.2.5 Updating a QR factorization

Section 2.2.1 gave the forms of the QR factorization of an m by n matrix A for the two cases  $m \ge n$ and m < n. Taking first the case  $m \ge n$ , the least squares solution of

$$Ax = b = \frac{n}{m-n} \begin{pmatrix} b_1 \\ b_2 \end{pmatrix}$$

is the solution of

$$Rx = Q_1^{\mathrm{T}}b.$$

If the original system is now augmented by the addition of p rows so that we require the solution of

$$\binom{A}{B}x = \frac{m}{p}\binom{b}{b_3}$$

where B is p by n, then this is equivalent to finding the least squares solution of

$$\hat{A}x = {n \atop p} {n \choose B} x = {Q_1^{\mathsf{T}}b \atop b_3} = \hat{b}$$

This now requires the QR factorization of the n + p by n triangular-rectangular matrix  $\hat{A}$ .

For the case  $m < n \le m + p$ , the least squares solution of the augmented system reduces to

$$\hat{A}x = \begin{pmatrix} B \\ R_1 & R_2 \end{pmatrix} x = \begin{pmatrix} b_3 \\ Q^{\mathsf{T}}b \end{pmatrix} = \hat{b},$$

where  $\hat{A}$  is pentagonal.

In both cases  $\hat{A}$  can be written as a special case of a triangular-pentagonal matrix consisting of an upper triangular part on top of a rectangular part which is itself on top of a trapezoidal part. In the first case there is no trapezoidal part, in the second case a zero upper triangular part can be added, and more generally the two cases can be combined.

#### 2.2.6 Other factorizations

The QL and RQ factorizations are given by

$$A = Q\begin{pmatrix} 0\\L \end{pmatrix}, \quad \text{if } m \ge n,$$

and

$$A = \begin{pmatrix} 0 & R \end{pmatrix} Q, \quad \text{if } m \le n.$$

The factorizations are less commonly used than either the QR or LQ factorizations described above, but have applications in, for example, the computation of generalized QR factorizations.

#### 2.3 The Singular Value Decomposition

The singular value decomposition (SVD) of an m by n matrix A is given by

$$A = U\Sigma V^{\mathrm{T}}, \quad (A = U\Sigma V^{\mathrm{H}} \text{in the complex case})$$

where U and V are orthogonal (unitary) and  $\Sigma$  is an m by n diagonal matrix with real diagonal elements,  $\sigma_i$ , such that

$$\sigma_1 \geq \sigma_2 \geq \cdots \geq \sigma_{\min(m,n)} \geq 0$$

The  $\sigma_i$  are the singular values of A and the first min(m, n) columns of U and V are the left and right singular vectors of A. The singular values and singular vectors satisfy

$$Av_i = \sigma_i u_i$$
 and  $A^{\mathsf{T}} u_i = \sigma_i v_i$  (or  $A^{\mathsf{H}} u_i = \sigma_i v_i$ )

where  $u_i$  and  $v_i$  are the *i*th columns of U and V respectively.

The computation proceeds in the following stages.

- 1. The matrix A is reduced to bidiagonal form  $A = U_1 B V_1^T$  if A is real  $(A = U_1 B V_1^H)$  if A is complex), where  $U_1$  and  $V_1$  are orthogonal (unitary if A is complex), and B is real and upper bidiagonal when  $m \ge n$  and lower bidiagonal when m < n, so that B is nonzero only on the main diagonal and either on the first superdiagonal (if  $m \ge n$ ) or the first subdiagonal (if m < n).
- 2. The SVD of the bidiagonal matrix B is computed as  $B = U_2 \Sigma V_2^T$ , where  $U_2$  and  $V_2$  are orthogonal and  $\Sigma$  is diagonal as described above. The singular vectors of A are then  $U = U_1 U_2$  and  $V = V_1 V_2$ .

If  $m \gg n$ , it may be more efficient to first perform a QR factorization of A, and then compute the SVD of the n by n matrix R, since if A = QR and  $R = U\Sigma V^{T}$ , then the SVD of A is given by  $A = (QU)\Sigma V^{T}$ .

Similarly, if  $m \ll n$ , it may be more efficient to first perform an LQ factorization of A.

This chapter supports two primary algorithms for computing the SVD of a bidiagonal matrix. They are:

- (i) the divide and conquer algorithm;
- (ii) the QR algorithm.

The divide and conquer algorithm is much faster than the QR algorithm if singular vectors of large matrices are required.

## 2.4 The Singular Value Decomposition and Least Squares Problems

The SVD may be used to find a minimum norm solution to a (possibly) rank-deficient linear least squares problem (1). The effective rank, k, of A can be determined as the number of singular values which exceed a suitable threshold. Let  $\hat{\Sigma}$  be the leading k by k sub-matrix of  $\Sigma$ , and  $\hat{V}$  be the matrix consisting of the first k columns of V. Then the solution is given by

$$x = \hat{V}\hat{\Sigma}^{-1}\hat{c}_1,$$

where  $\hat{c}_1$  consists of the first k elements of  $c = U^T b = U_2^T U_1^T b$ .

## 2.5 Generalized Linear Least Squares Problems

The simple type of linear least squares problem described in Section 2.1 can be generalized in various ways.

1. Linear least squares problems with equality constraints:

find x to minimize 
$$S = ||c - Ax||_2^2$$
 subject to  $Bx = d$ ,

where A is m by n and B is p by n, with  $p \le n \le m + p$ . The equations Bx = d may be regarded as a set of equality constraints on the problem of minimizing S. Alternatively the problem may be regarded as solving an overdetermined system of equations

$$\binom{A}{B}x = \binom{c}{d},$$

where some of the equations (those involving B) are to be solved exactly, and the others (those involving A) are to be solved in a least squares sense. The problem has a unique solution on the assumptions that B has full row rank p and the matrix  $\begin{pmatrix} A \\ B \end{pmatrix}$  has full column rank n. (For linear least squares problems with **inequality constraints**, refer to Chapter E04.)

#### 2. General Gauss-Markov linear model problems:

minimize  $||y||_2$  subject to d = Ax + By,

where A is m by n and B is m by p, with  $n \le m \le n + p$ . When B = I, the problem reduces to an ordinary linear least squares problem. When B is square and nonsingular, it is equivalent to a weighted linear least squares problem:

find x to minimize  $||B^{-1}(d - Ax)||_2$ .

The problem has a unique solution on the assumptions that A has full column rank n, and the matrix (A, B) has full row rank m. Unless B is diagonal, for numerical stability it is generally preferable to solve a weighted linear least squares problem as a general Gauss-Markov linear model problem.

## 2.6 Generalized Orthogonal Factorization and Generalized Linear Least Squares Problems

#### 2.6.1 Generalized QR Factorization

The generalized QR (GQR) factorization of an n by m matrix A and an n by p matrix B is given by the pair of factorizations

$$A = QR$$
 and  $B = QTZ$ ,

where Q and Z are respectively n by n and p by p orthogonal matrices (or unitary matrices if A and B are complex). R has the form

$$R = \frac{m}{n-m} \begin{pmatrix} m\\ R_{11}\\ 0 \end{pmatrix}, \quad \text{if } n \ge m,$$

or

$$R = n \begin{pmatrix} n & m-n \\ R_{11} & R_{12} \end{pmatrix}, \quad \text{if } n < m$$

where  $R_{11}$  is upper triangular. T has the form

$$T = n \begin{pmatrix} p-n & n \\ 0 & T_{12} \end{pmatrix}, \quad \text{if } n \le p,$$

or

$$T = {n-p \choose T_{11} \choose T_{21}}, \quad \text{if } n > p,$$

where  $T_{12}$  or  $T_{21}$  is upper triangular.

Note that if B is square and nonsingular, the GQR factorization of A and B implicitly gives the QRfactorization of the matrix  $B^{-1}A$ :

$$B^{-1}A = Z^{\mathrm{T}}(T^{-1}R)$$

without explicitly computing the matrix inverse  $B^{-1}$  or the product  $B^{-1}A$  (remembering that the inverse of an invertible upper triangular matrix and the product of two upper triangular matrices is an upper triangular matrix).

The GQR factorization can be used to solve the general (Gauss-Markov) linear model problem (GLM) (see Section 2.5, but note that A and B are dimensioned differently there as m by n and p by nrespectively). Using the GQR factorization of A and B, we rewrite the equation d = Ax + By as

$$Q^{\mathrm{T}}d = Q^{\mathrm{T}}Ax + Q^{\mathrm{T}}By$$
$$= Rx + TZy.$$

\_

We partition this as

$$\begin{pmatrix} d_1 \\ d_2 \end{pmatrix} = \begin{pmatrix} m \\ n-m \end{pmatrix} \begin{pmatrix} p-n+m & n-m \\ T_{11} & T_{12} \\ 0 & T_{22} \end{pmatrix} \begin{pmatrix} y_1 \\ y_2 \end{pmatrix}$$

where

$$\begin{pmatrix} d_1 \\ d_2 \end{pmatrix} \equiv Q^{\mathrm{T}}d, \quad \text{and} \quad \begin{pmatrix} y_1 \\ y_2 \end{pmatrix} \equiv Zy.$$

The GLM problem is solved by setting

$$y_1 = 0$$
 and  $y_2 = T_{22}^{-1} d_2$ 

from which we obtain the desired solutions

$$x = R_{11}^{-1}(d_1 - T_{12}y_2)$$
 and  $y = Z^{\mathsf{T}} \begin{pmatrix} 0 \\ y_2 \end{pmatrix}$ .

#### 2.6.2 Generalized RQ Factorization

The generalized RQ (GRQ) factorization of an m by n matrix A and a p by n matrix B is given by the pair of factorizations

$$A = RQ, \quad B = ZTQ$$

where Q and Z are respectively n by n and p by p orthogonal matrices (or unitary matrices if A and B are complex). R has the form

$$R = m \begin{pmatrix} n-m & m \\ 0 & R_{12} \end{pmatrix}, \quad \text{if } m \le n,$$

or

$$R = \frac{m-n}{n} \binom{n}{R_{11}}, \quad \text{if } m > n,$$

where  $R_{12}$  or  $R_{21}$  is upper triangular. T has the form

$$T = \frac{n}{p-n} \begin{pmatrix} n\\T_{11}\\0 \end{pmatrix}, \quad \text{if } p \ge n,$$

or

$$T = p \begin{pmatrix} p & n-p \\ T_{11} & T_{12} \end{pmatrix}, \quad \text{if } p < n,$$

where  $T_{11}$  is upper triangular.

Note that if B is square and nonsingular, the GRQ factorization of A and B implicitly gives the RQ factorization of the matrix  $AB^{-1}$ :

$$AB^{-1} = \left(RT^{-1}\right)Z^{\mathrm{T}}$$

without explicitly computing the matrix  $B^{-1}$  or the product  $AB^{-1}$  (remembering that the inverse of an invertible upper triangular matrix and the product of two upper triangular matrices is an upper triangular matrix).

The GRQ factorization can be used to solve the linear equality-constrained least squares problem (LSE) (see Section 2.5). We use the GRQ factorization of B and A (note that B and A have swapped roles), written as

$$B = TQ$$
 and  $A = ZRQ$ .

We write the linear equality constraints Bx = d as

$$TQx = d$$

which we partition as:

$$p\begin{pmatrix} n-p & p\\ 0 & T_{12} \end{pmatrix} \begin{pmatrix} x_1\\ x_2 \end{pmatrix} = d$$
 where  $\begin{pmatrix} x_1\\ x_2 \end{pmatrix} \equiv Qx$ 

Therefore  $x_2$  is the solution of the upper triangular system

$$T_{12}x_2 = d$$

Furthermore,

$$\begin{aligned} \|Ax - c\|_2 &= \|Z^{\mathsf{T}}Ax - Z^{\mathsf{T}}c\|_2 \\ &= \|RQx - Z^{\mathsf{T}}c\|_2 \end{aligned}.$$

We partition this expression as:

$$n-p$$
  $p$   $p$   
 $p+m-n$   $\begin{pmatrix} n-p & p \\ R_{11} & R_{12} \\ 0 & R_{22} \end{pmatrix} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix} - \begin{pmatrix} c_1 \\ c_2 \end{pmatrix},$ 

where  $\begin{pmatrix} c_1 \\ c_2 \end{pmatrix} \equiv Z^{\mathrm{T}}c.$ 

To solve the LSE problem, we set

$$R_{11}x_1 + R_{12}x_2 - c_1 = 0$$

which gives  $x_1$  as the solution of the upper triangular system

$$R_{11}x_1 = c_1 - R_{12}x_2.$$

Finally, the desired solution is given by

$$x = Q^{\mathsf{T}} \begin{pmatrix} x_1 \\ x_2 \end{pmatrix}.$$

#### 2.6.3 Generalized Singular Value Decomposition (GSVD)

The generalized (or quotient) singular value decomposition of an m by n matrix A and a p by n matrix B is given by the pair of factorizations

$$A = U\Sigma_1[0, R]Q^{\mathsf{T}}$$
 and  $B = V\Sigma_2[0, R]Q^{\mathsf{T}}$ .

The matrices in these factorizations have the following properties:

- U is m by m, V is p by p, Q is n by n, and all three matrices are orthogonal. If A and B are complex, these matrices are unitary instead of orthogonal, and  $Q^{T}$  should be replaced by  $Q^{H}$  in the pair of factorizations.
- R is r by r, upper triangular and nonsingular. [0, R] is r by n (in other words, the 0 is an r by n r zero matrix). The integer r is the rank of  $\begin{pmatrix} A \\ B \end{pmatrix}$ , and satisfies  $r \le n$ .
- $\Sigma_1$  is *m* by *r*,  $\Sigma_2$  is *p* by *r*, both are real, non-negative and diagonal, and  $\Sigma_1^T \Sigma_1 + \Sigma_2^T \Sigma_2 = I$ . Write  $\Sigma_1^T \Sigma_1 = \text{diag}(\alpha_1^2, \ldots, \alpha_r^2)$  and  $\Sigma_2^T \Sigma_2 = \text{diag}(\beta_1^2, \ldots, \beta_r^2)$ , where  $\alpha_i$  and  $\beta_i$  lie in the interval from 0 to 1. The ratios  $\alpha_1/\beta_1, \ldots, \alpha_r/\beta_r$  are called the **generalized singular values** of the pair *A*, *B*. If  $\beta_i = 0$ , then the generalized singular value  $\alpha_i/\beta_i$  is infinite.

 $\Sigma_1$  and  $\Sigma_2$  have the following detailed structures, depending on whether  $m \ge r$  or m < r. In the first case,  $m \ge r$ , then

$$\Sigma_1 = egin{array}{cc} k & l \ I & 0 \ 0 & C \ m-k-l & 0 \ \end{array} egin{array}{cc} k & l \ 0 & C \ 0 & 0 \ \end{array} egin{array}{cc} ext{and} & \Sigma_2 = egin{array}{cc} k & l \ 0 & S \ 0 & 0 \ \end{array} egin{array}{cc} k & l \ 0 & S \ 0 & 0 \ \end{array} egin{array}{cc} k & l \ 0 & S \ \end{array} egin{array}{cc} k & l \ 0 & S \ 0 & 0 \ \end{array} egin{array}{cc} k & l \ 0 & S \ \end{array} egin{array}{cc} k & l \ 0 & S \ \end{array} egin{array}{cc} k & l \ 0 & S \ \end{array} egin{array}{cc} k & l \ 0 & S \ \end{array} egin{array}{cc} k & l \ 0 & S \ \end{array} egin{array}{cc} k & l \ 0 & S \ \end{array} egin{array}{cc} k & l \ \end{array} egin{arrarray}{cc} k & l \ \end{array} egin{array}{cc} k & l \ \end{array} eta & l \ \end{array} eg$$

Here *l* is the rank of *B*, k = r - l, *C* and *S* are diagonal matrices satisfying  $C^2 + S^2 = I$ , and *S* is nonsingular. We may also identify  $\alpha_1 = \cdots = \alpha_k = 1$ ,  $\alpha_{k+i} = c_{ii}$ , for  $i = 1, 2, \dots, l$ ,  $\beta_1 = \cdots = \beta_k = 0$ , and  $\beta_{k+i} = s_{ii}$ , for  $i = 1, 2, \dots, l$ . Thus, the first *k* generalized singular values  $\alpha_1/\beta_1, \dots, \alpha_k/\beta_k$  are infinite, and the remaining *l* generalized singular values are finite.

In the second case, when m < r,

$$\Sigma_1 = \frac{k \quad m-k \quad k+l-m}{m-k \begin{pmatrix} I & 0 & 0 \\ 0 & C & 0 \end{pmatrix}}$$

and

$$\Sigma_{2} = \frac{m-k}{k+l-m} \begin{pmatrix} 0 & S & 0 \\ 0 & 0 & I \\ p-l & 0 & 0 \end{pmatrix}$$

Again, *l* is the rank of *B*, k = r - l, *C* and *S* are diagonal matrices satisfying  $C^2 + S^2 = I$ , and *S* is nonsingular, and we may identify  $\alpha_1 = \cdots = \alpha_k = 1$ ,  $\alpha_{k+i} = c_{ii}$ , for  $i = 1, 2, \ldots, m - k$ ,  $\alpha_{m+1} = \cdots = \alpha_r = 0$ ,  $\beta_1 = \cdots = \beta_k = 0$ ,  $\beta_{k+i} = s_{ii}$ , for  $i = 1, 2, \ldots, m - k$  and  $\beta_{m+1} = \cdots = \beta_r = 1$ . Thus, the first *k* generalized singular values  $\alpha_1/\beta_1, \ldots, \alpha_k/\beta_k$  are infinite, and the remaining *l* generalized singular values are finite.

Here are some important special cases of the generalized singular value decomposition. First, if B is square and nonsingular, then r = n and the generalized singular value decomposition of A and B is equivalent to the singular value decomposition of  $AB^{-1}$ , where the singular values of  $AB^{-1}$  are equal to the generalized singular values of the pair A, B:

$$AB^{-1} = \left(U\Sigma_1 RQ^{\mathsf{T}}\right) \left(V\Sigma_2 RQ^{\mathsf{T}}\right)^{-1} = U\left(\Sigma_1 \Sigma_2^{-1}\right) V^{\mathsf{T}}$$

Second, for the matrix C, where

$$C \equiv \begin{pmatrix} A \\ B \end{pmatrix}$$

if the columns of C are orthonormal, then r = n, R = I and the generalized singular value decomposition of A and B is equivalent to the CS (Cosine–Sine) decomposition of C:

$$\begin{pmatrix} A \\ B \end{pmatrix} = \begin{pmatrix} U & 0 \\ 0 & V \end{pmatrix} \begin{pmatrix} \Sigma_1 \\ \Sigma_2 \end{pmatrix} Q^{\mathsf{T}}.$$

Third, the generalized eigenvalues and eigenvectors of  $A^{T}A - \lambda B^{T}B$  can be expressed in terms of the generalized singular value decomposition: Let

$$X = Q \begin{pmatrix} I & 0 \\ 0 & R^{-1} \end{pmatrix}.$$

Then

$$X^{\mathrm{T}}A^{\mathrm{T}}AX = \begin{pmatrix} 0 & 0 \\ 0 & \varSigma_{1}^{\mathrm{T}}\varSigma_{1} \end{pmatrix}$$
 and  $X^{\mathrm{T}}B^{\mathrm{T}}BX = \begin{pmatrix} 0 & 0 \\ 0 & \varSigma_{2}^{\mathrm{T}}\varSigma_{2} \end{pmatrix}$ .

Therefore, the columns of X are the eigenvectors of  $A^{T}A - \lambda B^{T}B$ , and 'nontrivial' eigenvalues are the squares of the generalized singular values (see also Section 2.8). 'Trivial' eigenvalues are those corresponding to the leading n - r columns of X, which span the common null space of  $A^{T}A$  and  $B^{T}B$ . The 'trivial eigenvalues' are not well defined.

#### 2.6.4 The Full CS Decomposition of Orthogonal Matrices

In Section 2.6.3 the CS (Cosine-Sine) decomposition of an orthogonal matrix partitioned into two submatrices A and B was given by

$$\begin{pmatrix} A \\ B \end{pmatrix} = \begin{pmatrix} U & 0 \\ 0 & V \end{pmatrix} \begin{pmatrix} \Sigma_1 \\ \Sigma_2 \end{pmatrix} Q^{\mathsf{T}}.$$

The full CS decomposition of an m by m orthogonal matrix X partitions X into four submatrices and factorizes as

$$\begin{pmatrix} X_{11} & X_{12} \\ X_{21} & X_{22} \end{pmatrix} = \begin{pmatrix} U_1 & 0 \\ 0 & U_2 \end{pmatrix} \begin{pmatrix} \Sigma_{11} & -\Sigma_{12} \\ \Sigma_{21} & \Sigma_{22} \end{pmatrix} \begin{pmatrix} V_1 & 0 \\ 0 & V_2 \end{pmatrix}^{\mathsf{T}}$$

where,  $X_{11}$  is a p by q submatrix (which implies the dimensions of  $X_{12}$ ,  $X_{21}$  and  $X_{22}$ );  $U_1$ ,  $U_2$ ,  $V_1$  and  $V_2$  are orthogonal matrices of dimensions p, m - p, q and m - q respectively;  $\Sigma_{11}$  is the p by q singlediagonal matrix

$$\Sigma_{11} = \frac{k_{11} - r}{p - k_{11}} \begin{pmatrix} k_{11} - r & r & q - k_{11} \\ I & 0 & 0 \\ 0 & C & 0 \\ 0 & 0 & - \end{pmatrix}, \quad k_{11} = \min(p, q)$$

 $\Sigma_{12}$  is the p by m-q single-diagonal matrix

$$\Sigma_{12} = \frac{p - k_{12}}{r} \begin{pmatrix} m - q - k_{12} & r & k_{12} - r \\ 0 & 0 \\ k_{12} - r \begin{pmatrix} 0 & 0 \\ 0 & S & 0 \\ 0 & 0 & I \end{pmatrix}, \quad k_{12} = \min(p, m - q),$$

 $\Sigma_{21}$  is the m-p by q single-diagonal matrix

$$\Sigma_{21} = \frac{m - p - k_{21}}{r} \begin{pmatrix} q - k_{21} & r & k_{21} - r \\ 0 & 0 \\ k_{21} - r \end{pmatrix}, \quad k_{21} = \min(m - p, q),$$

and,  $\Sigma_{21}$  is the m-p by q single-diagonal matrix

$$\Sigma_{22} = \frac{k_{22} - r}{m - p - k_{22}} \begin{pmatrix} k_{22} - r & r & m - q - k_{22} \\ I & 0 & 0 \\ 0 & C & 0 \\ 0 & 0 & - \end{pmatrix}, \quad k_{22} = \min(m - p, m - q)$$

where  $r = \min(p, m - p, q, m - q)$  and the missing zeros remind us that either the column or the row is missing. The r by r diagonal matrices C and S are such that  $C^2 + S^2 = I$ .

This is equivalent to the simultaneous singular value decomposition of the four submatrices  $X_{11}$ ,  $X_{12}$ ,  $X_{21}$  and  $X_{22}$ .

#### 2.7 Symmetric Eigenvalue Problems

The symmetric eigenvalue problem is to find the eigenvalues,  $\lambda$ , and corresponding eigenvectors,  $z \neq 0$ , such that

$$Az = \lambda z$$
,  $A = A^{\mathrm{T}}$ , where A is real.

For the Hermitian eigenvalue problem we have

$$Az = \lambda z, \quad A = A^{H}, \quad \text{where } A \text{ is complex.}$$

For both problems the eigenvalues  $\lambda$  are real.

When all eigenvalues and eigenvectors have been computed, we write

$$A = Z\Lambda Z^{\mathrm{T}}$$
 (or  $A = Z\Lambda Z^{\mathrm{H}}$  if complex),

where  $\Lambda$  is a diagonal matrix whose diagonal elements are the eigenvalues, and Z is an orthogonal (or unitary) matrix whose columns are the eigenvectors. This is the classical *spectral factorization* of A.

The basic task of the symmetric eigenproblem routines is to compute values of  $\lambda$  and, optionally, corresponding vectors z for a given matrix A. This computation proceeds in the following stages.

- 1. The real symmetric or complex Hermitian matrix A is reduced to *real tridiagonal form* T. If A is real symmetric this decomposition is  $A = QTQ^{T}$  with Q orthogonal and T symmetric tridiagonal. If A is complex Hermitian, the decomposition is  $A = QTQ^{H}$  with Q unitary and T, as before, *real* symmetric tridiagonal.
- 2. Eigenvalues and eigenvectors of the real symmetric tridiagonal matrix T are computed. If all eigenvalues and eigenvectors are computed, this is equivalent to factorizing T as  $T = SAS^{T}$ , where S is orthogonal and  $\Lambda$  is diagonal. The diagonal entries of  $\Lambda$  are the eigenvalues of T, which are also the eigenvalues of A, and the columns of S are the eigenvectors of T; the eigenvectors of A are the columns of Z = QS, so that  $A = ZAZ^{T}$  ( $ZAZ^{H}$  when A is complex Hermitian).

This chapter supports four primary algorithms for computing eigenvalues and eigenvectors of real symmetric matrices and complex Hermitian matrices. They are:

- (i) the divide-and-conquer algorithm;
- (ii) the QR algorithm;
- (iii) bisection followed by inverse iteration;
- (iv) the Relatively Robust Representation (RRR).

The divide-and-conquer algorithm is generally more efficient than the traditional QR algorithm for computing all eigenvalues and eigenvectors, but the RRR algorithm tends to be fastest of all. For further information and references see Anderson *et al.* (1999).

# 2.8 Generalized Symmetric-definite Eigenvalue Problems

This section is concerned with the solution of the generalized eigenvalue problems  $Az = \lambda Bz$ ,  $ABz = \lambda z$ , and  $BAz = \lambda z$ , where A and B are real symmetric or complex Hermitian and B is positive definite. Each of these problems can be reduced to a standard symmetric eigenvalue problem, using a Cholesky factorization of B as either  $B = LL^{T}$  or  $B = U^{T}U$  ( $LL^{H}$  or  $U^{H}U$  in the Hermitian case).

With  $B = LL^{\mathrm{T}}$ , we have

$$Az = \lambda Bz \Rightarrow \left(L^{-1}AL^{-\mathsf{T}}\right)\left(L^{\mathsf{T}}z\right) = \lambda\left(L^{\mathsf{T}}z\right).$$

Hence the eigenvalues of  $Az = \lambda Bz$  are those of  $Cy = \lambda y$ , where C is the symmetric matrix  $C = L^{-1}AL^{-T}$  and  $y = L^{T}z$ . In the complex case C is Hermitian with  $C = L^{-1}AL^{-H}$  and  $y = L^{H}z$ .

Table 1 summarises how each of the three types of problem may be reduced to standard form  $Cy = \lambda y$ , and how the eigenvectors z of the original problem may be recovered from the eigenvectors y of the reduced problem. The table applies to real problems; for complex problems, transposed matrices must be replaced by conjugate-transposes.

	Type of problem	Factorization of B	Reduction	Recovery of eigenvectors
1.	$Az = \lambda Bz$	$B = LL^{\mathrm{T}}, B = U^{\mathrm{T}}U$	$C = L^{-1}AL^{-T},$ $C = U^{-T}AU^{-1}$	$egin{array}{ll} z = L^{-\mathrm{T}}y,\ z = U^{-1}y \end{array}$
2.	$ABz = \lambda z$	$B = LL^{\mathrm{T}}, B = U^{\mathrm{T}}U$	$C = L^{\mathrm{T}} A L,$ $C = U A U^{\mathrm{T}}$	$egin{array}{ll} z = L^{-T}y,\ z = U^{-1}y \end{array}$
3.	$BAz = \lambda z$	$B = LL^{\mathrm{T}}, B = U^{\mathrm{T}}U$	$C = L^{\mathrm{T}}AL,$ $C = UAU^{\mathrm{T}}$	$ \begin{aligned} z &= Ly, \\ z &= U^{\mathrm{T}}y \end{aligned} $

#### Table 1

Reduction of generalized symmetric-definite eigenproblems to standard problems

When the generalized symmetric-definite problem has been reduced to the corresponding standard problem  $Cy = \lambda y$ , this may then be solved using the routines described in the previous section. No special routines are needed to recover the eigenvectors z of the generalized problem from the eigenvectors y of the standard problem, because these computations are simple applications of Level 2 or Level 3 BLAS (see Chapter F06).

## 2.9 Packed Storage for Symmetric Matrices

Routines which handle symmetric matrices are usually designed so that they use either the upper or lower triangle of the matrix; it is not necessary to store the whole matrix. If either the upper or lower triangle is stored conventionally in the upper or lower triangle of a two-dimensional array, the remaining elements of the array can be used to store other useful data. However, that is not always convenient, and if it is important to economize on storage, the upper or lower triangle can be stored in a one-dimensional array of length n(n + 1)/2; that is, the storage is almost halved.

This storage format is referred to as *packed storage*; it is described in Section 3.3.2 in the F07 Chapter Introduction.

Routines designed for packed storage are usually less efficient, especially on high-performance computers, so there is a trade-off between storage and efficiency.

# 2.10 Band Matrices

A *band* matrix is one whose elements are confined to a relatively small number of subdiagonals or superdiagonals on either side of the main diagonal. Algorithms can take advantage of bandedness to reduce the amount of work and storage required. The storage scheme for band matrices is described in Section 3.3.4 in the F07 Chapter Introduction.

If the problem is the generalized symmetric definite eigenvalue problem  $Az = \lambda Bz$  and the matrices A and B are additionally banded, the matrix C as defined in Section 2.8 is, in general, full. We can reduce the problem to a banded standard problem by modifying the definition of C thus:

$$C = X^{\mathrm{T}}AX$$
, where  $X = U^{-1}Q$  or  $L^{-\mathrm{T}}Q$ ,

where Q is an orthogonal matrix chosen to ensure that C has bandwidth no greater than that of A.

A further refinement is possible when A and B are banded, which halves the amount of work required to form C. Instead of the standard Cholesky factorization of B as  $U^{T}U$  or  $LL^{T}$ , we use a *split Cholesky* factorization  $B = S^{T}S$ , where

$$S = \begin{pmatrix} U_{11} & \\ M_{21} & L_{22} \end{pmatrix}$$

with  $U_{11}$  upper triangular and  $L_{22}$  lower triangular of order approximately n/2; S has the same bandwidth as B.

#### 2.11 Nonsymmetric Eigenvalue Problems

The nonsymmetric eigenvalue problem is to find the eigenvalues,  $\lambda$ , and corresponding eigenvectors,  $v \neq 0$ , such that

$$Av = \lambda v.$$

More precisely, a vector v as just defined is called a *right eigenvector* of A, and a vector  $u \neq 0$  satisfying

$$u^{\mathrm{T}}A = \lambda u^{\mathrm{T}}$$
  $(u^{\mathrm{H}}A = \lambda u^{\mathrm{H}}$  when u is complex)

is called a *left eigenvector* of A.

A real matrix A may have complex eigenvalues, occurring as complex conjugate pairs.

This problem can be solved via the Schur factorization of A, defined in the real case as

$$A = ZTZ^{\mathrm{T}},$$

where Z is an orthogonal matrix and T is an upper quasi-triangular matrix with 1 by 1 and 2 by 2 diagonal blocks, the 2 by 2 blocks corresponding to complex conjugate pairs of eigenvalues of A. In the complex case, the Schur factorization is

$$A = ZTZ^{\mathrm{H}},$$

where Z is unitary and T is a complex upper triangular matrix.

The columns of Z are called the *Schur vectors*. For each k  $(1 \le k \le n)$ , the first k columns of Z form an orthonormal basis for the *invariant subspace* corresponding to the first k eigenvalues on the diagonal of T. Because this basis is orthonormal, it is preferable in many applications to compute Schur vectors rather than eigenvectors. It is possible to order the Schur factorization so that any desired set of k eigenvalues occupy the k leading positions on the diagonal of T.

The two basic tasks of the nonsymmetric eigenvalue routines are to compute, for a given matrix A, all n values of  $\lambda$  and, if desired, their associated right eigenvectors v and/or left eigenvectors u, and the Schur factorization.

These two basic tasks can be performed in the following stages.

- 1. A general matrix A is reduced to upper Hessenberg form H which is zero below the first subdiagonal. The reduction may be written  $A = QHQ^{T}$  with Q orthogonal if A is real, or  $A = QHQ^{H}$  with Q unitary if A is complex.
- 2. The upper Hessenberg matrix H is reduced to Schur form T, giving the Schur factorization  $H = STS^{T}$  (for H real) or  $H = STS^{H}$  (for H complex). The matrix S (the Schur vectors of H) may optionally be computed as well. Alternatively S may be postmultiplied into the matrix Q determined in stage 1, to give the matrix Z = QS, the Schur vectors of A. The eigenvalues are obtained from the diagonal elements or diagonal blocks of T.

3. Given the eigenvalues, the eigenvectors may be computed in two different ways. Inverse iteration can be performed on H to compute the eigenvectors of H, and then the eigenvectors can be multiplied by the matrix Q in order to transform them to eigenvectors of A. Alternatively the eigenvectors of T can be computed, and optionally transformed to those of H or A if the matrix S or Z is supplied.

The accuracy with which eigenvalues can be obtained can often be improved by *balancing* a matrix. This is discussed further in Section 2.14.6 below.

## 2.12 Generalized Nonsymmetric Eigenvalue Problem

The generalized nonsymmetric eigenvalue problem is to find the eigenvalues,  $\lambda$ , and corresponding eigenvectors,  $v \neq 0$ , such that

$$Av = \lambda Bv.$$

More precisely, a vector v as just defined is called a *right eigenvector* of the matrix pair (A, B), and a vector  $u \neq 0$  satisfying

$$u^{\mathrm{T}}A = \lambda u^{\mathrm{T}}B$$
 ( $u^{\mathrm{H}}A = \lambda u^{\mathrm{H}}B$  when u is complex)

is called a *left eigenvector* of the matrix pair (A, B).

If B is singular then the problem has one or more *infinite eigenvalues*  $\lambda = \infty$ , corresponding to Bv = 0. Note that if A is nonsingular, then the equivalent problem  $\mu Av = Bv$  is perfectly well defined and an infinite eigenvalue corresponds to  $\mu = 0$ . To deal with both finite (including zero) and infinite eigenvalues, the routines in this chapter do not compute  $\lambda$  explicitly, but rather return a pair of numbers  $(\alpha, \beta)$  such that if  $\beta \neq 0$ 

$$\lambda = \alpha / \beta$$

and if  $\alpha \neq 0$  and  $\beta = 0$  then  $\lambda = \infty$ .  $\beta$  is always returned as real and non-negative. Of course, computationally an infinite eigenvalue may correspond to a small  $\beta$  rather than an exact zero.

For a given pair (A, B) the set of all the matrices of the form  $(A - \lambda B)$  is called a matrix *pencil* and  $\lambda$  and v are said to be an eigenvalue and eigenvector of the pencil  $(A - \lambda B)$ . If A and B are both singular and share a common null space then

$$\det(A - \lambda B) \equiv 0$$

so that the pencil  $(A - \lambda B)$  is *singular* for all  $\lambda$ . In other words any  $\lambda$  can be regarded as an eigenvalue. In exact arithmetic a singular pencil will have  $\alpha = \beta = 0$  for some  $(\alpha, \beta)$ . Computationally if some pair  $(\alpha, \beta)$  is small then the pencil is singular, or nearly singular, and no reliance can be placed on any of the computed eigenvalues. Singular pencils can also manifest themselves in other ways; see, in particular, Sections 2.3.5.2 and 4.11.1.4 of Anderson *et al.* (1999) for further details.

The generalized eigenvalue problem can be solved via the *generalized Schur factorization* of the pair (A, B) defined in the real case as

$$A = QSZ^{\mathsf{T}}, \quad B = QTZ^{\mathsf{T}},$$

where Q and Z are orthogonal, T is upper triangular with non-negative diagonal elements and S is upper quasi-triangular with 1 by 1 and 2 by 2 diagonal blocks, the 2 by 2 blocks corresponding to complex conjugate pairs of eigenvalues. In the complex case, the generalized Schur factorization is

$$A = QSZ^{\mathrm{H}}, \quad B = QTZ^{\mathrm{H}},$$

where Q and Z are unitary and S and T are upper triangular, with T having real non-negative diagonal elements. The columns of Q and Z are called respectively the *left* and *right generalized Schur vectors* and span pairs of *deflating subspaces* of A and B, which are a generalization of invariant subspaces.

It is possible to order the generalized Schur factorization so that any desired set of k eigenvalues correspond to the k leading positions on the diagonals of the pair (S,T).

The two basic tasks of the generalized nonsymmetric eigenvalue routines are to compute, for a given pair (A, B), all n values of  $\lambda$  and, if desired, their associated right eigenvectors v and/or left eigenvectors u, and the generalized Schur factorization.

These two basic tasks can be performed in the following stages.

- 1. The matrix pair (A, B) is reduced to generalized upper Hessenberg form (H, R), where H is upper Hessenberg (zero below the first subdiagonal) and R is upper triangular. The reduction may be written as  $A = Q_1 H Z_1^T$ ,  $B = Q_1 R Z_1^T$  in the real case with  $Q_1$  and  $Z_1$  orthogonal, and  $A = Q_1 H Z_1^H$ ,  $B = Q_1 R Z_1^H$  in the complex case with  $Q_1$  and  $Z_1$  unitary.
- 2. The generalized upper Hessenberg form (H, R) is reduced to the generalized Schur form (S, T) using the generalized Schur factorization  $H = Q_2 S Z_2^T$ ,  $R = Q_2 T Z_2^T$  in the real case with  $Q_2$  and  $Z_2$  orthogonal, and  $H = Q_2 S Z_2^H$ ,  $R = Q_2 T Z_2^H$  in the complex case. The generalized Schur vectors of (A, B) are given by  $Q = Q_1 Q_2$ ,  $Z = Z_1 Z_2$ . The eigenvalues are obtained from the diagonal elements (or blocks) of the pair (S, T).
- 3. Given the eigenvalues, the eigenvectors of the pair (S,T) can be computed, and optionally transformed to those of (H,R) or (A,B).

The accuracy with which eigenvalues can be obtained can often be improved by *balancing* a matrix pair. This is discussed further in Section 2.14.8 below.

## 2.13 The Sylvester Equation and the Generalized Sylvester Equation

The Sylvester equation is a matrix equation of the form

$$AX + XB = C,$$

where A, B, and C are given matrices with A being m by m, B an n by n matrix and C, and the solution matrix X, m by n matrices. The solution of a special case of this equation occurs in the computation of the condition number for an invariant subspace, but a combination of routines in this chapter allows the solution of the general Sylvester equation.

Routines are also provided for solving a special case of the generalized Sylvester equations

$$AR - LB = C, \quad DR - LE = F,$$

where (A, D), (B, E) and (C, F) are given matrix pairs, and R and L are the solution matrices.

#### 2.14 Error and Perturbation Bounds and Condition Numbers

In this section we discuss the effects of rounding errors in the solution process and the effects of uncertainties in the data, on the solution to the problem. A number of the routines in this chapter return information, such as condition numbers, that allow these effects to be assessed. First we discuss some notation used in the error bounds of later sections.

The bounds usually contain the factor p(n) (or p(m, n)), which grows as a function of the matrix dimension n (or matrix dimensions m and n). It measures how errors can grow as a function of the matrix dimension, and represents a potentially different function for each problem. In practice, it usually grows just linearly;  $p(n) \leq 10n$  is often true, although generally only much weaker bounds can be actually proved. We normally describe p(n) as a 'modestly growing' function of n. For detailed derivations of various p(n), see Golub and Van Loan (2012) and Wilkinson (1965).

For linear equation (see Chapter F07) and least squares solvers, we consider bounds on the relative error  $||x - \hat{x}|| / ||x||$  in the computed solution  $\hat{x}$ , where x is the true solution. For eigenvalue problems we consider bounds on the error  $|\lambda_i - \hat{\lambda}_i|$  in the *i*th computed eigenvalue  $\hat{\lambda}_i$ , where  $\lambda_i$  is the true *i*th eigenvalue. For singular value problems we similarly consider bounds  $|\sigma_i - \hat{\sigma}_i|$ .

Bounding the error in computed eigenvectors and singular vectors  $\hat{v}_i$  is more subtle because these vectors are not unique: even though we restrict  $\|\hat{v}_i\|_2 = 1$  and  $\|v_i\|_2 = 1$ , we may still multiply them by arbitrary constants of absolute value 1. So to avoid ambiguity we bound the *angular difference* between  $\hat{v}_i$  and the true vector  $v_i$ , so that

$$\theta(v_i, \hat{v}_i) = \text{acute angle between } v_i \text{ and } \hat{v}_i$$

$$= \operatorname{arccos} |v_i^{\mathrm{H}} \hat{v}_i|.$$

$$(2)$$

Here  $\operatorname{arccos}(\theta)$  is in the standard range:  $0 \leq \operatorname{arccos}(\theta) < \pi$ . When  $\theta(v_i, \hat{v}_i)$  is small, we can choose a constant  $\alpha$  with absolute value 1 so that  $\|\alpha v_i - \hat{v}_i\|_2 \approx \theta(v_i, \hat{v}_i)$ .

In addition to bounds for individual eigenvectors, bounds can be obtained for the spaces spanned by collections of eigenvectors. These may be much more accurately determined than the individual eigenvectors which span them. These spaces are called *invariant subspaces* in the case of eigenvectors, because if v is any vector in the space, Av is also in the space, where A is the matrix. Again, we will use angle to measure the difference between a computed space  $\hat{S}$  and the true space S:

$$\theta\left(S,\hat{S}\right) = \text{acute angle between } S \text{ and } \hat{S}$$
  
= 
$$\max_{\substack{s \in S \\ s \neq 0}} \inf_{\hat{s} \neq 0} \theta(s,\hat{s}) \text{ or } \max_{\substack{\hat{s} \in \hat{S} \\ \hat{s} \neq 0}} \inf_{\substack{s \in S \\ s \neq 0}} \theta(s,\hat{s})$$
(3)

 $\theta(S, \hat{S})$  may be computed as follows. Let S be a matrix whose columns are orthonormal and span S. Similarly let  $\hat{S}$  be an orthonormal matrix with columns spanning  $\hat{S}$ . Then

$$\theta \Big( S, \hat{S} \Big) = \arccos \sigma_{\min} \left( S^{\mathrm{H}} \hat{S} \right).$$

Finally, we remark on the accuracy of the bounds when they are large. Relative errors like  $||\hat{x} - x||/||x||$ and angular errors like  $\theta(\hat{v}_i, v_i)$  are only of interest when they are much less than 1. Some stated bounds are not strictly true when they are close to 1, but rigorous bounds are much more complicated and supply little extra information in the interesting case of small errors. These bounds are indicated by using the symbol  $\lesssim$ , or 'approximately less than', instead of the usual  $\leq$ . Thus, when these bounds are close to 1 or greater, they indicate that the computed answer may have no significant digits at all, but do not otherwise bound the error.

A number of routines in this chapter return error estimates and/or condition number estimates directly. In other cases Anderson *et al.* (1999) gives code fragments to illustrate the computation of these estimates, and a number of the Chapter F08 example programs, for the driver routines, implement these code fragments.

#### 2.14.1 Least squares problems

The conventional error analysis of linear least squares problems goes as follows. The problem is to find the x minimizing  $||Ax - b||_2$ . Let  $\hat{x}$  be the solution computed using one of the methods described above. We discuss the most common case, where A is overdetermined (i.e., has more rows than columns) and has full rank.

Then the computed solution  $\hat{x}$  has a small normwise backward error. In other words  $\hat{x}$  minimizes  $||(A+E)\hat{x} - (b+f)||_2$ , where

$$\max\left(\frac{\|E\|_2}{\|A\|_2}, \frac{\|f\|_2}{\|b\|_2}\right) \le p(n)\epsilon$$

and p(n) is a modestly growing function of n and  $\epsilon$  is the *machine precision*. Let  $\kappa_2(A) = \sigma_{\max}(A)/\sigma_{\min}(A)$ ,  $\rho = ||Ax - b||_2$ , and  $\sin(\theta) = \rho/||b||_2$ . Then if  $p(n)\epsilon$  is small enough, the error  $\hat{x} - x$  is bounded by

$$\frac{\|x - \hat{x}\|_2}{\|x\|_2} \lesssim p(n)\epsilon \bigg\{ \frac{2\kappa_2(A)}{\cos(\theta)} + \tan(\theta)\kappa_2^2(A) \bigg\}.$$

If A is rank-deficient, the problem can be *regularized* by treating all singular values less than a userspecified threshold as exactly zero. See Golub and Van Loan (2012) for error bounds in this case, as well as for the underdetermined case.

The solution of the overdetermined, full-rank problem may also be characterised as the solution of the linear system of equations

$$\begin{pmatrix} I & A \\ A^{\mathsf{T}} & 0 \end{pmatrix} \begin{pmatrix} r \\ x \end{pmatrix} = \begin{pmatrix} b \\ 0 \end{pmatrix}.$$

By solving this linear system (see Chapter F07) component-wise error bounds can also be obtained (see Arioli *et al.* (1989)).

#### 2.14.2 The singular value decomposition

The usual error analysis of the SVD algorithm is as follows (see Golub and Van Loan (2012)).

The computed SVD,  $\hat{U}\hat{\Sigma}\hat{V}^{T}$ , is nearly the exact SVD of A + E, i.e.,  $A + E = (\hat{U} + \delta\hat{U})\hat{\Sigma}(\hat{V} + \delta\hat{V})$  is the true SVD, so that  $\hat{U} + \delta\hat{U}$  and  $\hat{V} + \delta\hat{V}$  are both orthogonal, where  $||E||_{2}/||A||_{2} \leq p(m,n)\epsilon$ ,  $||\delta\hat{U}|| \leq p(m,n)\epsilon$ , and  $||\delta\hat{V}|| \leq p(m,n)\epsilon$ . Here p(m,n) is a modestly growing function of m and n and  $\epsilon$  is the **machine precision**. Each computed singular value  $\hat{\sigma}_{i}$  differs from the true  $\sigma_{i}$  by an amount satisfying the bound

$$|\hat{\sigma}_i - \sigma_i| \le p(m, n)\epsilon\sigma_1$$

Thus large singular values (those near  $\sigma_1$ ) are computed to high relative accuracy and small ones may not be.

The angular difference between the computed left singular vector  $\hat{u}_i$  and the true  $u_i$  satisfies the approximate bound

$$heta(\hat{u}_i, u_i) \lesssim rac{p(m, n)\epsilon \|A\|_2}{\operatorname{\mathsf{gap}}_i}$$

where

$$\operatorname{gap}_i = \min_{j \neq i} \left| \sigma_i - \sigma_j \right|$$

is the *absolute gap* between  $\sigma_i$  and the nearest other singular value. Thus, if  $\sigma_i$  is close to other singular values, its corresponding singular vector  $u_i$  may be inaccurate. The same bound applies to the computed right singular vector  $\hat{v}_i$  and the true vector  $v_i$ . The gaps may be easily obtained from the computed singular values.

Let  $\hat{S}$  be the space spanned by a collection of computed left singular vectors  $\{\hat{u}_i, i \in I\}$ , where I is a subset of the integers from 1 to n. Let S be the corresponding true space. Then

$$heta (\hat{oldsymbol{S}}, oldsymbol{S}) \lesssim rac{p(m, n)\epsilon \|A\|_2}{ ext{gap}_I}.$$

where

$$\operatorname{gap}_{I} = \min\{ \left| \sigma_{i} - \sigma_{j} \right| \quad \text{for } i \in I, j \notin I \}$$

is the absolute gap between the singular values in I and the nearest other singular value. Thus, a cluster of close singular values which is far away from any other singular value may have a well determined space  $\hat{S}$  even if its individual singular vectors are ill-conditioned. The same bound applies to a set of right singular vectors  $\{\hat{v}_i, i \in I\}$ .

In the special case of bidiagonal matrices, the singular values and singular vectors may be computed much more accurately (see Demmel and Kahan (1990)). A bidiagonal matrix B has nonzero entries only on the main diagonal and the diagonal immediately above it (or immediately below it). Reduction of a dense matrix to bidiagonal form B can introduce additional errors, so the following bounds for the bidiagonal case do not apply to the dense case.

Using the routines in this chapter, each computed singular value of a bidiagonal matrix is accurate to nearly full relative accuracy, no matter how tiny it is, so that

$$|\hat{\sigma}_i - \sigma_i| \leq p(m, n)\epsilon\sigma_i.$$

The computed left singular vector  $\hat{u}_i$  has an angular error at most about

$$\theta(\hat{u}_i, u_i) \lesssim \frac{p(m, n)\epsilon}{\mathrm{relgap}_i}$$

where

$$\operatorname{relgap}_i = \min_{j \neq i} |\sigma_i - \sigma_j| / (\sigma_i + \sigma_j)$$

is the *relative gap* between  $\sigma_i$  and the nearest other singular value. The same bound applies to the right singular vector  $\hat{v}_i$  and  $v_i$ . Since the relative gap may be much larger than the absolute gap, this error bound may be much smaller than the previous one. The relative gaps may be easily obtained from the computed singular values.

#### 2.14.3 The symmetric eigenproblem

The usual error analysis of the symmetric eigenproblem is as follows (see Parlett (1998)).

The computed eigendecomposition  $\hat{Z}\hat{A}\hat{Z}^{T}$  is nearly the exact eigendecomposition of A + E, i.e.,  $A + E = (\hat{Z} + \delta\hat{Z})\hat{A}(\hat{Z} + \delta\hat{Z})^{T}$  is the true eigendecomposition so that  $\hat{Z} + \delta\hat{Z}$  is orthogonal, where  $||E||_{2}/||A||_{2} \leq p(n)\epsilon$  and  $||\delta\hat{Z}||_{2} \leq p(n)\epsilon$  and p(n) is a modestly growing function of n and  $\epsilon$  is the *machine precision*. Each computed eigenvalue  $\hat{\lambda}_{i}$  differs from the true  $\lambda_{i}$  by an amount satisfying the bound

$$\left|\hat{\lambda}_i - \lambda_i\right| \le p(n)\epsilon \|A\|_2.$$

Thus large eigenvalues (those near  $\max_{i} |\lambda_i| = ||A||_2$ ) are computed to high relative accuracy and small ones may not be.

The angular difference between the computed unit eigenvector  $\hat{z}_i$  and the true  $z_i$  satisfies the approximate bound

$$heta(\hat{z}_i, z_i) \lesssim rac{p(n)\epsilon \|A\|_2}{ ext{gap}_i}$$

if  $p(n)\epsilon$  is small enough, where

$$ext{gap}_i = \min_{j 
eq i} ig| \lambda_i - \lambda_j ig|$$

is the *absolute gap* between  $\lambda_i$  and the nearest other eigenvalue. Thus, if  $\lambda_i$  is close to other eigenvalues, its corresponding eigenvector  $z_i$  may be inaccurate. The gaps may be easily obtained from the computed eigenvalues.

Let **S** be the invariant subspace spanned by a collection of eigenvectors  $\{\hat{z}_i, i \in I\}$ , where **I** is a subset of the integers from 1 to *n*. Let **S** be the corresponding true subspace. Then

$$hetaig(\hat{m{S}},m{S}ig)\lesssim rac{p(n)\epsilon\|A\|_2}{ ext{gap}_{m{I}}}$$

where

$$\operatorname{gap}_{\boldsymbol{I}} = \min\{ \left| \lambda_i - \lambda_j \right| \quad \text{for } i \in \boldsymbol{I}, j \notin \boldsymbol{I} \}$$

is the absolute gap between the eigenvalues in I and the nearest other eigenvalue. Thus, a cluster of close eigenvalues which is far away from any other eigenvalue may have a well determined invariant subspace  $\hat{S}$  even if its individual eigenvectors are ill-conditioned.

In the special case of a real symmetric tridiagonal matrix T, routines in this chapter can compute the eigenvalues and eigenvectors much more accurately. See Anderson *et al.* (1999) for further details.

#### 2.14.4 The generalized symmetric-definite eigenproblem

The three types of problem to be considered are  $A - \lambda B$ ,  $AB - \lambda I$  and  $BA - \lambda I$ . In each case A and B are real symmetric (or complex Hermitian) and B is positive definite. We consider each case in turn, assuming that routines in this chapter are used to transform the generalized problem to the standard symmetric problem, followed by the solution of the symmetric problem. In all cases

$$ext{gap}_i = \min_{j 
eq i} ig| \lambda_i - \lambda_j ig|$$

is the *absolute gap* between  $\lambda_i$  and the nearest other eigenvalue.

1.  $A - \lambda B$ . The computed eigenvalues  $\hat{\lambda}_i$  can differ from the true eigenvalues  $\lambda_i$  by an amount

$$\left|\hat{\lambda}_{i} - \lambda_{i}\right| \lesssim p(n)\epsilon \left\|B^{-1}\right\|_{2} \|A\|_{2}.$$

The angular difference between the computed eigenvector  $\hat{z}_i$  and the true eigenvector  $z_i$  is

$$heta(\hat{z}_i, z_i) \lesssim rac{p(n)\epsilon \|B^{-1}\|_2 \|A\|_2 (\kappa_2(B))^{1/2}}{\operatorname{gap}_i}.$$

2.  $AB - \lambda I$  or  $BA - \lambda I$ . The computed eigenvalues  $\hat{\lambda}_i$  can differ from the true eigenvalues  $\lambda_i$  by an amount

$$|\hat{\lambda}_i - \lambda_i| \lesssim p(n)\epsilon \|B\|_2 \|A\|_2.$$

The angular difference between the computed eigenvector  $\hat{z}_i$  and the true eigenvector  $z_i$  is

$$heta(\hat{z}_i, z_i) \lesssim rac{p(n)\epsilon \|B\|_2 \|A\|_2 (\kappa_2(B))^{1/2}}{\operatorname{gap}_i}.$$

These error bounds are large when B is ill-conditioned with respect to inversion ( $\kappa_2(B)$  is large). It is often the case that the eigenvalues and eigenvectors are much better conditioned than indicated here. One way to get tighter bounds is effective when the diagonal entries of B differ widely in magnitude, as for example with a graded matrix.

- 1.  $A \lambda B$ . Let  $D = \text{diag}(b_{11}^{-1/2}, \dots, b_{nn}^{-1/2})$  be a diagonal matrix. Then replace B by DBD and A by DAD in the above bounds.
- 2.  $AB \lambda I$  or  $BA \lambda I$ . Let  $D = \text{diag}(b_{11}^{-1/2}, \dots, b_{nn}^{-1/2})$  be a diagonal matrix. Then replace B by DBD and A by  $D^{-1}AD^{-1}$  in the above bounds.

Further details can be found in Anderson et al. (1999).

#### 2.14.5 The nonsymmetric eigenproblem

The nonsymmetric eigenvalue problem is more complicated than the symmetric eigenvalue problem. In this section, we just summarise the bounds. Further details can be found in Anderson *et al.* (1999).

We let  $\hat{\lambda}_i$  be the *i*th computed eigenvalue and  $\lambda_i$  the *i*th true eigenvalue. Let  $\hat{v}_i$  be the corresponding computed right eigenvector, and  $v_i$  the true right eigenvector (so  $Av_i = \lambda_i v_i$ ). If I is a subset of the

integers from 1 to *n*, we let  $\lambda_I$  denote the average of the selected eigenvalues:  $\lambda_I = \left(\sum_{i \in I} \lambda_i\right) / \left(\sum_{i \in I} 1\right)$ , and similarly for  $\hat{\lambda}_I$ . We also let  $S_I$  denote the subspace spanned by  $\{v_i, i \in I\}$ ; it is called a right

invariant subspace because if v is any vector in  $S_I$  then Av is also in  $S_I$ .  $\hat{S}_I$  is the corresponding computed subspace.

The algorithms for the nonsymmetric eigenproblem are normwise backward stable: they compute the exact eigenvalues, eigenvectors and invariant subspaces of slightly perturbed matrices (A + E), where  $||E|| \le p(n)\epsilon||A||$ . Some of the bounds are stated in terms of  $||E||_2$  and others in terms of  $||E||_F$ ; one may use  $p(n)\epsilon$  for either quantity.

Routines are provided so that, for each  $(\hat{\lambda}_i, \hat{v}_i)$  pair the two values  $s_i$  and  $sep_i$ , or for a selected subset I of eigenvalues the values  $s_I$  and  $sep_I$  can be obtained, for which the error bounds in Table 2 are true for sufficiently small ||E||, (which is why they are called asymptotic):

Simple eigenvalue	$\left \hat{\lambda_i} - \lambda_i  ight  \lesssim \ E\ _2/s_i$
Eigenvalue cluster	$\left  \hat{\lambda}_{I} - \lambda_{I} \right  \lesssim \ E\ _{2} / s_{I}$
Eigenvector	$ heta(\hat{v}_i, v_i) \lesssim \ E\ _F / sep_i$
Invariant subspace	$\theta \left( \hat{S}_{I}, S_{I} \right) \lesssim \ E\ _{F} / sep_{I}$

 Table 2

 Asymptotic error bounds for the nonsymmetric eigenproblem

If the problem is ill-conditioned, the asymptotic bounds may only hold for extremely small ||E||. The global error bounds of Table 3 are guaranteed to hold for all  $||E||_F < s \times sep/4$ :

Simple eigenvalue	$\left \hat{\lambda}_i - \lambda_i\right  \le n \ E\ _2 / s_i$	Holds for all E
Eigenvalue cluster	$\left \hat{\lambda}_{I} - \lambda_{I}\right  \leq 2\ E\ _{2}/s_{I}$	Requires $  E  _F < s_I \times sep_I/4$
Eigenvector	$ heta(\hat{v}_i, v_i) \leq \arctan\left(2\ E\ _F / \left(sep_i - 4\ E\ _F / s_i\right)\right)$	Requires $  E  _F < s_i \times sep_i/4$
Invariant subspace	$\theta(\hat{S}_{I}, S_{I}) \leq \arctan(2\ E\ _{F}/(sep_{I} - 4\ E\ _{F}/s_{I}))$	Requires $  E  _F < s_I \times sep_I/4$

#### Table 3

Global error bounds for the nonsymmetric eigenproblem

#### 2.14.6 Balancing and condition for the nonsymmetric eigenproblem

There are two preprocessing steps one may perform on a matrix A in order to make its eigenproblem easier. The first is *permutation*, or reordering the rows and columns to make A more nearly upper triangular (closer to Schur form):  $A' = PAP^{T}$ , where P is a permutation matrix. If A' is permutable to upper triangular form (or close to it), then no floating-point operations (or very few) are needed to reduce it to Schur form. The second is *scaling* by a diagonal matrix D to make the rows and columns of A' more nearly equal in norm:  $A'' = DA'D^{-1}$ . Scaling can make the matrix norm smaller with respect to the eigenvalues, and so possibly reduce the inaccuracy contributed by roundoff (see Chapter 11 of Wilkinson and Reinsch (1971)). We refer to these two operations as *balancing*.

Permuting has no effect on the condition numbers or their interpretation as described previously. Scaling, however, does change their interpretation and further details can be found in Anderson *et al.* (1999).

### 2.14.7 The generalized nonsymmetric eigenvalue problem

The algorithms for the generalized nonsymmetric eigenvalue problem are normwise backward stable: they compute the exact eigenvalues (as the pairs  $(\alpha, \beta)$ ), eigenvectors and deflating subspaces of slightly perturbed pairs (A + E, B + F), where

$$||(E,F)||_F \le p(n)\epsilon ||(A,B)||_F.$$

Asymptotic and global error bounds can be obtained, which are generalizations of those given in Tables 2 and 3. See Section 4.11 of Anderson *et al.* (1999) for details. Routines are provided to compute estimates of reciprocal conditions numbers for eigenvalues and eigenspaces.

#### 2.14.8 Balancing the generalized eigenvalue problem

As with the standard nonsymmetric eigenvalue problem, there are two preprocessing steps one may perform on a matrix pair (A, B) in order to make its eigenproblem easier; permutation and scaling, which together are referred to as balancing, as indicated in the following two steps.

1. The balancing routine first attempts to permute A and B to block upper triangular form by a similarity transformation:

$$PAP^{\mathsf{T}} = F = \begin{pmatrix} F_{11} & F_{12} & F_{13} \\ & F_{22} & F_{23} \\ & & F_{33} \end{pmatrix},$$

$$PBP^{\mathrm{T}} = G = \begin{pmatrix} G_{11} & G_{12} & G_{13} \\ & G_{22} & G_{23} \\ & & G_{33} \end{pmatrix},$$

where P is a permutation matrix,  $F_{11}$ ,  $F_{33}$ ,  $G_{11}$  and  $G_{33}$  are upper triangular. Then the diagonal elements of the matrix  $(F_{11}, G_{11})$  and  $(G_{33}, H_{33})$  are generalized eigenvalues of (A, B). The rest of the generalized eigenvalues are given by the matrix pair  $(F_{22}, G_{22})$ . Subsequent operations to compute the eigenvalues of (A, B) need only be applied to the matrix  $(F_{22}, G_{22})$ ; this can save a significant amount of work if  $(F_{22}, G_{22})$  is smaller than the original matrix pair (A, B). If no suitable permutation exists (as is often the case), then there is no gain in efficiency or accuracy.

2. The balancing routine applies a diagonal similarity transformation to (F, G), to make the rows and columns of  $(F_{22}, G_{22})$  as close as possible in the norm:

$$DFD^{-1} = \begin{pmatrix} I & & \\ & D_{22} & \\ & & I \end{pmatrix} \begin{pmatrix} F_{11} & F_{12} & F_{13} \\ & F_{22} & F_{23} \\ & & F_{33} \end{pmatrix} \begin{pmatrix} I & & \\ & D_{22}^{-1} & \\ & & I \end{pmatrix},$$
$$DGD^{-1} = \begin{pmatrix} I & & \\ & D_{22} & \\ & & I \end{pmatrix} \begin{pmatrix} G_{11} & G_{12} & G_{13} \\ & G_{22} & G_{23} \\ & & G_{33} \end{pmatrix} \begin{pmatrix} I & & \\ & D_{22}^{-1} & \\ & & I \end{pmatrix}.$$

This transformation usually improves the accuracy of computed generalized eigenvalues and eigenvectors. However, there are exceptional occasions when this transformation increases the norm of the pencil; in this case accuracy could be lower with diagonal balancing.

See Anderson et al. (1999) for further details.

#### 2.14.9 Other problems

Error bounds for other problems such as the generalized linear least squares problem and generalized singular value decomposition can be found in Anderson *et al.* (1999).

#### 2.15 Block Partitioned Algorithms

A number of the routines in this chapter use what is termed a *block partitioned algorithm*. This means that at each major step of the algorithm a *block* of rows or columns is updated, and much of the computation is performed by matrix-matrix operations on these blocks. These matrix-matrix operations make efficient use of computer memory and are key to achieving high performance. See Golub and Van Loan (2012) or Anderson *et al.* (1999) for more about block partitioned algorithms.

The performance of a block partitioned algorithm varies to some extent with the *block size* – that is, the number of rows or columns per block. This is a machine-dependent constant, which is set to a suitable

value when the library is implemented on each range of machines. *Block size* affects the amount of workspace that should be supplied to a particular routine. This is discussed in Section 3.4.3.

# **3** Recommendations on Choice and Use of Available Routines

## 3.1 Available Routines

The tables in the following sub-sections show the routines which are provided for performing different computations on different types of matrices. Each entry in the table gives the NAG routine name and the LAPACK double precision name(see Section 3.2).

Black box (or driver) routines are provided for the solution of most problems. In a number of cases there are *simple drivers*, which just return the solution to the problem, as well as *expert drivers*, which return additional information, such as condition number estimates, and may offer additional facilities such as balancing. The following sub-sections give tables for the driver routines.

## 3.1.1 Driver routines

## 3.1.1.1 Linear least squares problems (LLS)

Operation	real	complex
solve LLS using $QR$ or $LQ$ factorization	f08aaf (dgels)	f08anf (zgels)
solve LLS using complete orthogonal factorization	f08baf (dgelsy)	f08bnf (zgelsy)
solve LLS using SVD	f08kaf (dgelss)	f08knf (zgelss)
solve LLS using divide-and-conquer SVD	f08kcf (dgelsd)	f08kqf (zgelsd)

## 3.1.1.2 Generalized linear least squares problems (LSE and GLM)

Operation	real	complex
solve LSE problem using GRQ	f08zaf (dgglse)	f08znf (zgglse)
solve GLM problem using GQR	f08zbf (dggglm)	f08zpf (zggglm)

#### 3.1.1.3 Symmetric eigenvalue problems (SEP)

Function and storage scheme	real	complex
simple driver divide-and-conquer driver expert driver RRR driver	f08faf (dsyev) f08fcf (dsyevd) f08fbf (dsyevx) f08fdf (dsyevr)	f08fnf (zheev) f08fqf (zheevd) f08fpf (zheevx) f08frf (zheevr)
<b>packed storage</b> simple driver divide-and-conquer driver expert driver	f08gaf (dspev) f08gcf (dspevd) f08gbf (dspevx)	f08gnf (zhpev) f08gqf (zhpevd) f08gpf (zhpevx)

<b>band matrix</b> simple driver divide-and-conquer driver expert driver	f08haf (dsbev) f08hcf (dsbevd) f08hbf (dsbevx)	f08hnf (zhbev) f08hqf (zhbevd) f08hqf (zhbevx)
<b>tridiagonal matrix</b> simple driver divide-and-conquer driver expert driver RRR driver	f08jaf (dstev) f08jcf (dstevd) f08jbf (dstevx) f08jdf (dstevr)	

# 3.1.1.4 Nonsymmetric eigenvalue problem (NEP)

Function and storage scheme	real	complex
simple driver for Schur factorization	f08paf (dgees)	f08pnf (zgees)
expert driver for Schur factorization	f08pbf (dgeesx)	f08ppf (zgeesx)
simple driver for eigenvalues/vectors	f08naf (dgeev)	f08nnf (zgeev)
expert driver for eigenvalues/vectors	f08nbf (dgeevx)	f08npf (zgeevx)

# 3.1.1.5 Singular value decomposition (SVD)

Function and storage scheme	real	complex
simple driver divide-and-conquer driver simple driver for one-sided Jacobi SVD expert driver for one-sided Jacobi SVD	f08kbf (dgesvd) f08kdf (dgesdd) f08kjf (dgesvj) f08khf (dgejsv)	f08kpf (zgesvd) f08krf (zgesdd)

# 3.1.1.6 Generalized symmetric definite eigenvalue problems (GSEP)

Function and storage scheme	real	complex
simple driver divide-and-conquer driver expert driver	f08saf (dsygv) f08scf (dsygvd) f08sbf (dsygvx)	f08snf (zhegv) f08sqf (zhegvd) f08spf (zhegvx)
<b>packed storage</b> simple driver divide-and-conquer driver expert driver	f08taf (dspgv) f08tcf (dspgvd) f08tbf (dspgvx)	f08tnf (zhpgv) f08tqf (zhpgvd) f08tpf (zhpgvx)
<b>band matrix</b> simple driver divide-and-conquer driver expert driver	f08uaf (dsbgv) f08ucf (dsbgvd) f08ubf (dsbgvx)	f08unf (zhbgv) f08uqf (zhbgvd) f08upf (zhbgvx)

## 3.1.1.7 Generalized nonsymmetric eigenvalue problem (GNEP)

Function and storage scheme	real	complex
simple driver for Schur factorization	f08xcf (dgges3)	f08xqf (zgges3)
expert driver for Schur factorization	f08xbf (dggesx)	f08xpf (zggesx)
simple driver for eigenvalues/vectors	f08wcf (dggev3)	f08wqf (zggev3)
expert driver for eigenvalues/vectors	f08wbf (dggevx)	f08wpf (zggevx)

# 3.1.1.8 Generalized singular value decomposition (GSVD)

Function and storage scheme	real	complex
singular values/vectors	f08vcf (dggsvd3)	f08vqf (zggsvd3)

## 3.1.2 Computational routines

It is possible to solve problems by calling two or more routines in sequence. Some common sequences of routines are indicated in the tables in the following sub-sections; an asterisk (\*) against a routine name means that the sequence of calls is illustrated in the example program for that routine.

## 3.1.2.1 Orthogonal factorizations

Routines are provided for QR factorization (with and without column pivoting), and for LQ, QL and RQ factorizations (without pivoting only), of a general real or complex rectangular matrix. A routine is also provided for the RQ factorization of a real or complex upper trapezoidal matrix. (LAPACK refers to this as the RZ factorization.)

The factorization routines do not form the matrix Q explicitly, but represent it as a product of elementary reflectors (see Section 3.3.6). Additional routines are provided to generate all or part of Q explicitly if it is required, or to apply Q in its factored form to another matrix (specifically to compute one of the matrix products QC,  $Q^{T}C$ , CQ or  $CQ^{T}$  with  $Q^{T}$  replaced by  $Q^{H}$  if C and Q are complex).

	Factorize without pivoting	Factorize with pivoting	Factorize (blocked)	Generate matrix <i>Q</i>	Apply matrix <i>Q</i>	Apply Q (blocked)
QR factorization, real matrices	f08aef (dgeqrf)	f08bff (dgeqp3)	f08abf (dgeqrt)	f08aff (dorgqr)	f08agf (dormqr)	f08acf (dgemqrt)
QR factorization, real triangular-pentagonal			f08bbf (dtpqrt)			f08bcf (dtpmqrt)
LQ factorization, real matrices	f08ahf (dgelqf)			f08ajf (dorglq)	f08akf (dormlq)	
QL factorization, real matrices	f08cef (dgeqlf)			f08cff (dorgql)	f08cgf (dormql)	
RQ factorization, real matrices	f08chf (dgerqf)			f08cjf (dorgrq)	f08ckf (dormrq)	
RQ factorization, real upper trapezoidal matrices	f08bhf (dtzrzf)				f08bkf (dormrz)	
QR factorization, complex matrices	f08asf (zgeqrf)	f08btf (zgeqp3)	f08apf (zgeqrt)	f08atf (zungqr)	f08auf (zunmqr)	f08aqf (zgemqrt)
QR factorization, complex triangular-pentagonal			f08bpf (ztpqrt)			f08bqf (ztpmqrt)
LQ factorization, complex matrices	f08avf (zgelqf)			f08awf (zunglq)	f08axf (zunmlq)	
QL factorization, complex matrices	f08csf (zgeqlf)			f08ctf (zungql)	f08cuf (zunmql)	

RQ factorization, complex matrices	f08cvf (zgerqf)		f08cwf (zungrq)	f08cxf (zunmrq)	
RQ factorization, complex upper trapezoidal matrices	f08bvf (ztzrzf)			f08bxf (zunmrz)	

To solve linear least squares problems, as described in Sections 2.2.1 or 2.2.3, routines based on the QR factorization can be used:

real data, full-rank problem

(dgeqrf) and f08agf (dormqr),
f08abf (dgeqrt) and f08acf
(dgemqrt), f06yjf (dtrsm)
f08anf (zgels), f08asf
(zgeqrf) and f08auf (zunmqr),
f08apf (zgeqrt) and f08aqf
(zgemqrt), f06zjf (ztrsm)
f08bff (dgeqp3)*, f06yjf
(dtrsm), f08agf (dormqr)
f08btf (zgeqp3)*, f06zjf
(ztrsm), f08auf (zunmqr)

To find the minimum norm solution of under-determined systems of linear equations, as described in Section 2.2.2, routines based on the LQ factorization can be used:

real data, full-rank problem

complex data, full-rank problem

f08ahf (dgelqf)\*, f06yjf (dtrsm), f08akf (dormlq) f08avf (zgelqf)\*, f06zjf (ztrsm), f08axf (zunmlq)

f08aaf (dgels), f08aef

## 3.1.2.2 Generalized orthogonal factorizations

Routines are provided for the generalized QR and RQ factorizations of real and complex matrix pairs.

	Factorize
Generalized QR factorization, real matrices	f08zef (dggqrf)
Generalized RQ factorization, real matrices	f08zff (dggrqf)
Generalized QR factorization, complex matrices	f08zsf (zggqrf)
Generalized RQ factorization, complex matrices	f08ztf (zggrqf)

### 3.1.2.3 Singular value problems

Routines are provided to reduce a general real or complex rectangular matrix A to real bidiagonal form B by an orthogonal transformation  $A = QBP^{T}$  (or by a unitary transformation  $A = QBP^{H}$  if A is complex). Different routines allow a full matrix A to be stored conventionally (see Section 3.3.1), or a band matrix to use band storage (see Section 3.3.4 in the F07 Chapter Introduction).

The routines for reducing full matrices do not form the matrix Q or P explicitly; additional routines are provided to generate all or part of them, or to apply them to another matrix, as with the routines for orthogonal factorizations. Explicit generation of Q or P is required before using the bidiagonal QR algorithm to compute left or right singular vectors of A.

The routines for reducing band matrices have options to generate Q or P if required.

Further routines are provided to compute all or part of the singular value decomposition of a real bidiagonal matrix; the same routines can be used to compute the singular value decomposition of a real or complex matrix that has been reduced to bidiagonal form.

	Reduce to bidiagonal form	Generate matrix <i>Q</i> or <i>P</i> <sup>T</sup>	Apply matrix <i>Q</i> or <i>P</i>		bidiagonal	SVD of bidiagonal form (divide and conquer)
real matrices	f08kef (dgebrd)	f08kff (dorgbr)	f08kgf (dormbr)	f08lef (dgbbrd)	f08mef (dbdsqr)	f08mdf (dbdsdc)
complex matrices	f08ksf (zgebrd)	f08ktf (zungbr)	f08kuf (zunmbr)	f08lsf (zgbbrd)	f08msf (zbdsqr)	

Given the singular values, **f08flf (ddisna)** is provided to compute the reciprocal condition numbers for the left or right singular vectors of a real or complex matrix.

To compute the singular values and vectors of a rectangular matrix, as described in Section 2.3, use the following sequence of calls:

#### Rectangular matrix (standard storage)

real matrix, singular values and vectors complex matrix, singular values and vectors	f08kef (dgebrd), f08kff (dorgbr)*, f08mef (dbdsqr) f08ksf (zgebrd), f08ktf (zungbr)*, f08msf (zbdsqr)
Rectangular matrix (banded)	
real matrix, singular values and vectors	f08lef (dgbbrd), f08kff (dorgbr), f08mef (dbdsqr)
complex matrix, singular values and vectors	f08lsf (zgbbrd), f08ktf

To use the singular value decomposition to solve a linear least squares problem, as described in Section 2.4, the following routines are required:

real data

complex data

f06yaf (dgemm), f08kef (dgebrd), f08kff (dorgbr), f08kgf (dormbr), f08mef (dbdsqr) f06zaf (zgemm), f08ksf (zgebrd), f08ktf (zungbr), f08kuf (zunmbr), f08msf (zbdsqr)

(zungbr), f08msf (zbdsqr)

## 3.1.2.4 Generalized singular value decomposition

Routines are provided to compute the generalized SVD of a real or complex matrix pair (A, B) in upper trapezoidal form. Routines are also provided to reduce a general real or complex matrix pair to the required upper trapezoidal form.

	Reduce to trapezoidal form	Generalized SVD of trapezoidal form
real matrices	f08vgf (dggsvp3)	f08yef (dtgsja)
complex matrices	f08vuf (zggsvp3)	f08ysf (ztgsja)

Routines are provided for the full CS decomposition of orthogonal and unitary matrices expressed as 2 by 2 partitions of submatrices. For real orthogonal matrices the CS decomposition is performed by **f08raf (dorcsd)**, while for unitary matrices the equivalent routine is **f08rnf (zuncsd)**.

## 3.1.2.5 Symmetric eigenvalue problems

Routines are provided to reduce a real symmetric or complex Hermitian matrix A to real tridiagonal form T by an orthogonal similarity transformation  $A = QTQ^{T}$  (or by a unitary transformation  $A = QTQ^{H}$  if A is complex). Different routines allow a full matrix A to be stored conventionally (see Section 3.3.1 in the F07 Chapter Introduction) or in packed storage (see Section 3.3.2 in the F07 Chapter Introduction); or a band matrix to use band storage (see Section 3.3.4 in the F07 Chapter Introduction).

The routines for reducing full matrices do not form the matrix Q explicitly; additional routines are provided to generate Q, or to apply it to another matrix, as with the routines for orthogonal factorizations. Explicit generation of Q is required before using the QR algorithm to find all the eigenvectors of A; application of Q to another matrix is required after eigenvectors of T have been found by inverse iteration, in order to transform them to eigenvectors of A.

The routines for reducing band matrices have an option to generate Q if required.

	Reduce to tridiagonal form	Generate matrix <i>Q</i>	Apply matrix Q
real symmetric matrices	f08fef (dsytrd)	f08fff (dorgtr)	f08fgf (dormtr)
real symmetric matrices (packed storage)	f08gef (dsptrd)	f08gff (dopgtr)	f08ggf (dopmtr)
real symmetric band matrices	f08hef (dsbtrd)		
complex Hermitian matrices	f08fsf (zhetrd)	f08ftf (zungtr)	f08fuf (zunmtr)
complex Hermitian matrices (packed storage)	f08gsf (zhptrd)	f08gtf (zupgtr)	f08guf (zupmtr)
complex Hermitian band matrices	f08hsf (zhbtrd)		

Given the eigenvalues, **f08flf (ddisna)** is provided to compute the reciprocal condition numbers for the eigenvectors of a real symmetric or complex Hermitian matrix.

A variety of routines are provided to compute eigenvalues and eigenvectors of the real symmetric tridiagonal matrix T, some computing all eigenvalues and eigenvectors, some computing selected eigenvalues and eigenvectors. The same routines can be used to compute eigenvalues and eigenvectors of a real symmetric or complex Hermitian matrix which has been reduced to tridiagonal form.

## Eigenvalues and eigenvectors of real symmetric tridiagonal matrices:

The original (non-reduced) matrix is Real Symmetric or Complex Hermitian

all eigenvalues (root-free $QR$ algorithm) all eigenvalues (root-free $QR$ algorithm called by divide-and-conquer) selected eigenvalues (bisection) selected eigenvalues (RRR)	f08jff (dsterf) f08jcf (dstevd) or f08jhf (dstedc) f08jjf (dstebz) f08jlf (dstegr)
The original (non-reduced) matrix is Real Symmetric	
all eigenvalues and eigenvectors ( $QR$ algorithm) all eigenvalues and eigenvectors (divide-and-conquer)	f08jef (dsteqr) f08jef (dstevd) or f08jhf (dstada)
all eigenvalues and eigenvectors (positive definite case) selected eigenvectors (inverse iteration) selected eigenvalues and eigenvectors (RRR)	(dstedc) f08jgf (dpteqr) f08jkf (dstein) f08jlf (dstegr)

# The original (non-reduced) matrix is Complex Hermitian

all eigenvalues and eigenvectors ( $QR$ algorithm)	f08jsf (zsteqr)
all eigenvalues and eigenvectors (divide and conquer)	f08jvf (zstedc)
all eigenvalues and eigenvectors (positive definite case)	f08juf (zpteqr)
selected eigenvectors (inverse iteration)	f08jxf (zstein)
selected eigenvalues and eigenvectors (RRR)	f08jyf (zstegr)

The following sequences of calls may be used to compute various combinations of eigenvalues and eigenvectors, as described in Section 2.7.

# Sequences for computing eigenvalues and eigenvectors

Real Symmetric matrix (standard storage)

all eigenvalues and eigenvectors (using divide-and-conquer) all eigenvalues and eigenvectors (using <i>QR</i> algorithm) selected eigenvalues and eigenvectors (bisection and inverse iteration) selected eigenvalues and eigenvectors (RRR)	f08fcf (dsyevd) f08fef (dsytrd), f08fff (dorgtr)*, f08jef (dsteqr) f08fef (dsytrd), f08fgf (dormtr), f08jjf (dstebz), f08jkf (dstein)* f08fef (dsytrd), f08fgf (dormtr), f08jlf (dstegr)
Real Symmetric matrix (packed storage)	
all eigenvalues and eigenvectors (using divide-and-conquer) all eigenvalues and eigenvectors (using $QR$ algorithm)	f08gcf (dspevd) f08gef (dsptrd), f08gff (dopgtr) and f08jef (dsteqr)
selected eigenvalues and eigenvectors (bisection and inverse iteration)	f08gef (dsptrd), f08ggf (dopmtr), f08jjf (dstebz),
selected eigenvalues and eigenvectors (RRR)	f08jkf (dstein)* f08gef (dsptrd), f08ggf (dopmtr), f08jlf (dstegr)
Real Symmetric banded matrix	
all eigenvalues and eigenvectors (using divide-and-conquer) all eigenvalues and eigenvectors (using $QR$ algorithm)	f08hcf (dsbevd) f08hef (dsbtrd)*, f08jef (dsteqr)
Complex Hermitian matrix (standard storage)	
all eigenvalues and eigenvectors (using divide-and-conquer) all eigenvalues and eigenvectors (using $QR$ algorithm)	f08fqf (zheevd) f08fsf (zhetrd), f08ftf (zungtr)*, f08jsf (zsteqr)
selected eigenvalues and eigenvectors (bisection and inverse iteration)	f08fsf (zhetrd), f08fuf (zunmtr), f08jjf (dstebz), f08jxf (zstein)*
selected eigenvalues and eigenvectors (RRR)	f08fsf (zhetrd), f08fuf (zunmtr), f08jyf (zstegr)
Complex Hermitian matrix (packed storage)	
all eigenvalues and eigenvectors (using divide-and-conquer) all eigenvalues and eigenvectors (using $QR$ algorithm)	f08gqf (zhpevd) f08gsf (zhptrd), f08gtf (zupgtr)*, f08jsf (zsteqr)

(zsteqr)

selected eigenvalues and eigenvectors (bisection and inverse iteration)	f08gsf (zhptrd), f08guf (zupmtr), f08jjf (dstebz),
selected eigenvalues and eigenvectors (RRR)	f08jxf (zstein)* f08gsf (zhptrd), f08guf (zupmtr) and f08jyf (zstegr)
Complex Hermitian banded matrix	
all eigenvalues and eigenvectors (using divide-and-conquer) all eigenvalues and eigenvectors (using $QR$ algorithm)	f08hqf (zhbevd) f08hsf (zhbtrd)*, f08jsf

## 3.1.2.6 Generalized symmetric-definite eigenvalue problems

Routines are provided for reducing each of the problems  $Ax = \lambda Bx$ ,  $ABx = \lambda x$  or  $BAx = \lambda x$  to an equivalent standard eigenvalue problem  $Cy = \lambda y$ . Different routines allow the matrices to be stored either conventionally or in packed storage. The positive definite matrix B must first be factorized using a routine from Chapter F07. There is also a routine which reduces the problem  $Ax = \lambda Bx$  where A and B are banded, to an equivalent banded standard eigenvalue problem; this uses a split Cholesky factorization for which a routine in Chapter F08 is provided.

	Reduce to standard problem	Reduce to standard problem (packed storage)	Reduce to standard problem (band matrices)
real symmetric matrices	f08sef (dsygst)	f08tef (dspgst)	f08uef (dsbgst)
complex Hermitian matrices	f08ssf (zhegst)	f08tsf (zhpgst)	f08usf (zhbgst)

The equivalent standard problem can then be solved using the routines discussed in Section 3.1.2.5. For example, to compute all the eigenvalues, the following routines must be called:

real symmetric-definite problem	f07fdf (dpotrf), f08sef (dsygst)*, f08fef (dsytrd), f08jff (dsterf)
real symmetric-definite problem, packed storage	f07gdf (dpptrf), f08tef (dspgst)*, f08gef (dsptrd), f08jff (dsterf)
real symmetric-definite banded problem	f08uff (dpbstf)*, f08uef (dsbgst)*, f08hef (dsbtrd), f08jff (dsterf)
complex Hermitian-definite problem	f07frf (zpotrf), f08ssf (zhegst)*, f08fsf (zhetrd), f08jff (dsterf)
complex Hermitian-definite problem, packed storage	f07grf (zpptrf), f08tsf (zhpgst)*, f08gsf (zhptrd), f08jff (dsterf)
complex Hermitian-definite banded problem	f08utf (zpbstf)*, f08usf (zhbgst)*, f08hsf (zhbtrd), f08jff (dsterf)

If eigenvectors are computed, the eigenvectors of the equivalent standard problem must be transformed back to those of the original generalized problem, as indicated in Section 2.8; routines from Chapter F06 may be used for this.

## 3.1.2.7 Nonsymmetric eigenvalue problems

Routines are provided to reduce a general real or complex matrix A to upper Hessenberg form H by an orthogonal similarity transformation  $A = QHQ^{T}$  (or by a unitary transformation  $A = QHQ^{H}$  if A is complex).

These routines do not form the matrix Q explicitly; additional routines are provided to generate Q, or to apply it to another matrix, as with the routines for orthogonal factorizations. Explicit generation of Q is required before using the QR algorithm on H to compute the Schur vectors; application of Q to another matrix is needed after eigenvectors of H have been computed by inverse iteration, in order to transform them to eigenvectors of A.

Routines are also provided to balance the matrix before reducing it to Hessenberg form, as described in Section 2.14.6. Companion routines are required to transform Schur vectors or eigenvectors of the balanced matrix to those of the original matrix.

	Reduce to Hessenberg form	Generate matrix <i>Q</i>	Apply matrix <i>Q</i>	Balance	Back- transform vectors after balancing
real matrices	f08nef	f08nff	f08ngf	f08nhf (dge	f08njf (dge
	(dgehrd)	(dorghr)	(dormhr)	bal)	bak)
complex matrices	f08nsf	f08ntf	f08nuf	f08nvf (zge	f08nwf (zge
	(zgehrd)	(zunghr)	(zunmhr)	bal)	bak)

Routines are provided to compute the eigenvalues and all or part of the Schur factorization of an upper Hessenberg matrix. Eigenvectors may be computed either from the upper Hessenberg form by inverse iteration, or from the Schur form by back-substitution; these approaches are equally satisfactory for computing individual eigenvectors, but the latter may provide a more accurate basis for a subspace spanned by several eigenvectors.

Additional routines estimate the sensitivities of computed eigenvalues and eigenvectors, as discussed in Section 2.14.5.

	Eigenvalues and Schur factorization (QR algorithm)	0		
real matrices	f08pef (dhseqr)	f08pkf (dhsein)	f08qkf (dtrevc)	f08qlf (dtrsna)
complex matrices	f08psf (zhseqr)	f08pxf (zhsein)	f08qxf (ztrevc)	f08qyf (ztrsna)

Finally routines are provided for reordering the Schur factorization, so that eigenvalues appear in any desired order on the diagonal of the Schur form. The routines **f08qff (dtrexc)** and **f08qtf (ztrexc)** simply swap two diagonal elements or blocks, and may need to be called repeatedly to achieve a desired order. The routines **f08qgf (dtrsen)** and **f08quf (ztrsen)** perform the whole reordering process for the important special case where a specified cluster of eigenvalues is to appear at the top of the Schur form; if the Schur vectors are reordered at the same time, they yield an orthonormal basis for the invariant subspace corresponding to the specified cluster of eigenvalues. These routines can also compute the sensitivities of the cluster of eigenvalues and the invariant subspace.

	Reorder Schur factorization	Reorder Schur factorization, find basis for invariant subspace and estimate sensitivities
real matrices	f08qff (dtrexc)	f08qgf (dtrsen)
complex matrices	f08qtf (ztrexc)	f08quf (ztrsen)

The following sequences of calls may be used to compute various combinations of eigenvalues, Schur vectors and eigenvectors, as described in Section 2.11:

real matrix, all eigenvalues and Schur factorization	f08nef (dgehrd), f08nff (dorghr)*, f08pef (dhseqr)
real matrix, all eigenvalues and selected eigenvectors	f08nef (dgehrd), f08ngf (dormhr), f08pef (dhseqr),
	f08pkf (dhsein)
real matrix, all eigenvalues and eigenvectors (with balancing)	f08nhf (dgebal)*, f08nef (dgehrd), f08nff (dorghr),
	f08njf (dgebak), f08pef (dhseqr), f08pkf (dhsein)
complex matrix, all eigenvalues and Schur factorization	f08nsf (zgehrd), f08ntf
complex matrix, all eigenvalues and selected eigenvectors	(zunghr)*, f08psf (zhseqr) f08nsf (zgehrd), f08nuf
I I I I I I I I I I I I I I I I I I I	(zunmhr), f08psf (zhseqr),
complex matrix, all eigenvalues and eigenvectors (with balancing)	f08pxf (zhsein)* f08nvf (zgebal)*, f08nsf (zgehrd), f08ntf (zunghr), f08nwf (zgebak), f08psf
	(zhseqr), f08pxf (zhsein)

## 3.1.2.8 Generalized nonsymmetric eigenvalue problems

Routines are provided to reduce a real or complex matrix pair  $(A_1, R_1)$ , where  $A_1$  is general and  $R_1$  is upper triangular, to generalized upper Hessenberg form by orthogonal transformations  $A_1 = Q_1 H Z_1^T$ ,  $R_1 = Q_1 R Z_1^T$ , (or by unitary transformations  $A_1 = Q_1 H Z_1^H$ ,  $R = Q_1 R_1 Z_1^H$ , in the complex case). These routines can optionally return  $Q_1$  and/or  $Z_1$ . Note that to transform a general matrix pair (A, B) to the form  $(A_1, R_1)$  a QR factorization of B ( $B = \tilde{Q}R_1$ ) should first be performed and the matrix  $A_1$  obtained as  $A_1 = \tilde{Q}^T A$  (see Section 3.1.2.1 above).

Routines are also provided to balance a general matrix pair before reducing it to generalized Hessenberg form, as described in Section 2.14.8. Companion routines are provided to transform vectors of the balanced pair to those of the original matrix pair.

	Reduce to generalized Hessenberg form	Balance	Backtransform vectors after balancing
real matrices	f08wff (dgghd3)	f08whf (dggbal)	f08wjf (dggbak)
complex matrices	f08wtf (zgghd3)	f08wvf (zggbal)	f08wwf (zggbak)

Routines are provided to compute the eigenvalues (as the pairs  $(\alpha, \beta)$ ) and all or part of the generalized Schur factorization of a generalized upper Hessenberg matrix pair. Eigenvectors may be computed from the generalized Schur form by back-substitution.

	Eigenvalues and generalized Schur factorization (QZ algorithm)	Eigenvectors from generalized Schur factorization	Sensitivities of eigenvalues and eigenvectors
real matrices	f08xef (dhgeqz)	f08ykf (dtgevc)	f08ylf (dtgsna)
complex matrices	f08xsf (zhgeqz)	f08yxf (ztgevc)	f08yyf (ztgsna)

Additional routines estimate the sensitivities of computed eigenvalues and eigenvectors.

Finally, routines are provided for reordering the generalized Schur factorization so that eigenvalues appear in any desired order on the diagonal of the generalized Schur form. **f08yff (dtgexc)** and **f08ytf (ztgexc)** simply swap two diagonal elements or blocks, and may need to be called repeatedly to achieve a desired order. **f08ygf (dtgsen)** and **f08yuf (ztgsen)** perform the whole reordering process for the important special case where a specified cluster of eigenvalues is to appear at the top of the generalized Schur form; if the Schur vectors are reordered at the same time, they yield an orthonormal basis for the deflating subspace corresponding to the specified cluster of eigenvalues. These routines can also compute the sensitivities of the cluster of eigenvalues and the deflating subspace.

	Reorder generalized Schur factorization	Reorder generalized Schur factorization, find basis for deflating subspace and estimate sensitivites
real matrices	f08yff (dtgexc)	f08ygf (dtgsen)
complex matrices	f08ytf (ztgexc)	f08yuf (ztgsen)

The following sequences of calls may be used to compute various combinations of eigenvalues, generalized Schur vectors and eigenvectors

real matrix pair, all eigenvalues (with balancing)

real matrix pair, all eigenvalues and generalized Schur factorization

real matrix pair, all eigenvalues and eigenvectors (with balancing)

f08aef (dgeqrf), f08agf (dormqr) (or f08abf (dgeqrt), f08acf (dgemqrt)), f08wff (dgghd3), f08whf (dggbal), f08xef (dhgeqz)\* f08aef (dgeqrf), f08aff (dorgqr), f08agf (dormqr) (or f08abf (dgeqrt), f08acf (dgemqrt)), f08wff (dgghd3), f08xef (dhgeqz) f06qff, f06qhf, f08aef (dgeqrf), f08aff (dorgqr), f08agf (dormqr) (or f08abf (dgeqrt), f08acf (dgemqrt)), f08wff (dgghd3), f08whf (dggbal), f08xef (dhgeqz), f08ykf (dtgevc)\*, f08wjf (dggbak) f08asf (zgeqrf), f08auf (zunmqr) (or f08apf (zgeqrt), f08aqf (zgemqrt)), f08wtf (zgghd3), f08wvf (zggbal), f08xsf (zhgeqz)\*

complex matrix pair, all eigenvalues (with balancing)

complex matrix pair, all eigenvalues and generalized Schur factorization

complex matrix pair, all eigenvalues and eigenvectors (with balancing)

f08asf (zgeqrf), f08atf (zungqr), f08auf (zunmqr) (or f08apf (zgeqrt), f08aqf (zgemqrt)), f08wtf (zgghd3), f08xsf (zhgeqz) f06tff, f06thf, f08asf (zgeqrf), f08atf (zungqr), f08auf (zunmqr) (or f08apf (zgeqrt), f08aqf (zgemqrt)), f08wtf (zgghd3), f08wvf (zggbal), f08xsf (zhgeqz), f08yxf (ztgevc)\*, f08wwf (zggbak)

## 3.1.2.9 The Sylvester equation and the generalized Sylvester equation

Routines are provided to solve the real or complex Sylvester equation  $AX \pm XB = C$ , where A and B are upper quasi-triangular if real, or upper triangular if complex. To solve the general form of the Sylvester equation in which A and B are general square matrices, A and B must be reduced to upper (quasi-) triangular form by the Schur factorization, using routines described in Section 3.1.2.7. For more details, see the documents for the routines listed below.

	Solve the Sylvester equation	
real matrices	f08qhf (dtrsyl)	
complex matrices	f08qvf (ztrsyl)	

Routines are also provided to solve the real or complex generalized Sylvester equations

$$AR - LB = C, \quad DR - LE = F,$$

where the pairs (A, D) and (B, E) are in generalized Schur form. To solve the general form of the generalized Sylvester equation in which (A, D) and (B, E) are general matrix pairs, (A, D) and (B, E) must first be reduced to generalized Schur form.

	Solve the generalized Sylvester equation
real matrices	f08yhf (dtgsyl)
complex matrices	f08yvf (ztgsyl)

## 3.2 NAG Names and LAPACK Names

As well as the NAG routine name (beginning F08), the tables in Section 3.1 show the LAPACK routine names in double precision.

The routines may be called either by their NAG or LAPACK names. When using the NAG Library, the double precision form of the LAPACK name must be used (beginning with D- or Z-).

References to Chapter F08 routines in the manual normally include the LAPACK double precision names, for example **f08aef (dgeqrf)**. The LAPACK routine names follow a simple scheme (which is similar to that used for the BLAS in Chapter F06). Each name has the structure **XYYZZZ**, where the components have the following meanings:

- the initial letter X indicates the data type (real or complex) and precision:
  - S real, single precision (in Fortran 77, REAL)
  - D real, double precision (in Fortran 77, DOUBLE PRECISION)
  - C complex, single precision (in Fortran 77, COMPLEX)

- Z complex, double precision (in Fortran 77, COMPLEX\*16 or DOUBLE COMPLEX)
- the second and third letters **YY** indicate the type of the matrix A or matrix pair (A, B) (and in some cases the storage scheme):
  - $BD\ -\ bidiagonal$
  - DI diagonal
  - GB general band
  - GE general
  - GG general pair (B may be triangular)
  - HB (complex) Hermitian band
  - HE Hermitian
  - HG generalized upper Hessenberg
  - HP Hermitian (packed storage)
  - HS upper Hessenberg
  - OP (real) orthogonal (packed storage)
  - OR (real) orthogonal
  - PT symmetric or Hermitian positive definite tridiagonal
  - SB (real) symmetric band
  - SP symmetric (packed storage)
  - ST (real) symmetric tridiagonal
  - SY symmetric
  - TG triangular pair (one may be quasi-triangular)
  - TP triangular-pentagonal
  - TR triangular (or quasi-triangular)
  - UN (complex) unitary
  - UP (complex) unitary (packed storage)
- the last three letters ZZZ indicate the computation performed. For example, QRF is a QR factorization.

Thus the routine **DGEQRF** performs a QR factorization of a real general matrix; the corresponding routine for a complex general matrix is **ZGEQRF**.

## **3.3 Matrix Storage Schemes**

In this chapter the following storage schemes are used for matrices:

- conventional storage in a two-dimensional array;
- packed storage for symmetric or Hermitian matrices;
- packed storage for orthogonal or unitary matrices;
- band storage for general, symmetric or Hermitian band matrices;
- storage of bidiagonal, symmetric or Hermitian tridiagonal matrices in two one-dimensional arrays.

These storage schemes are compatible with those used in Chapters F06 and F07, but different schemes for packed, band and tridiagonal storage are used in a few older routines in Chapters F01, F02, F03 and F04.

## 3.3.1 Conventional storage

Please see Section 3.3.1 in the F07 Chapter Introduction for full details.

## 3.3.2 Packed storage

Please see Section 3.3.2 in the F07 Chapter Introduction for full details.

## 3.3.3 Band storage

Please see Section 3.3.4 in the F07 Chapter Introduction for full details.

#### 3.3.4 Tridiagonal and bidiagonal matrices

A symmetric tridiagonal or bidiagonal matrix is stored in two one-dimensional arrays, one of length n containing the diagonal elements, and one of length n-1 containing the off-diagonal elements. (Older routines in Chapter F02 store the off-diagonal elements in elements 2:n of a vector of length n.)

#### 3.3.5 Real diagonal elements of complex matrices

Please see Section 3.3.6 in the F07 Chapter Introduction for full details.

#### 3.3.6 Representation of orthogonal or unitary matrices

A real orthogonal or complex unitary matrix (usually denoted Q) is often represented in the NAG Library as a product of *elementary reflectors* – also referred to as *elementary Householder matrices* (usually denoted  $H_i$ ). For example,

$$Q = H_1 H_2 \cdots H_k.$$

You need not be aware of the details, because routines are provided to work with this representation, either to generate all or part of Q explicitly, or to multiply a given matrix by Q or  $Q^{T}$  ( $Q^{H}$  in the complex case) without forming Q explicitly.

Nevertheless, the following further details may occasionally be useful.

An elementary reflector (or elementary Householder matrix) H of order n is a unitary matrix of the form

$$H = I - \tau v v^{\rm H} \tag{4}$$

where  $\tau$  is a scalar, and v is an n-element vector, with  $|\tau|^2 ||v||_2^2 = 2 \times \text{Re}(\tau)$ ; v is often referred to as the *Householder vector*. Often v has several leading or trailing zero elements, but for the purpose of this discussion assume that H has no such special structure.

There is some redundancy in the representation (4), which can be removed in various ways. The representation used in Chapter F08 and in LAPACK (which differs from those used in some of the routines in Chapters F01, F02, F04 and F06) sets  $v_1 = 1$ ; hence  $v_1$  need not be stored. In real arithmetic,  $1 \le \tau \le 2$ , except that  $\tau = 0$  implies H = I.

In complex arithmetic,  $\tau$  may be complex, and satisfies  $1 \le \text{Re}(\tau) \le 2$  and  $|\tau - 1| \le 1$ . Thus a complex H is not Hermitian (as it is in other representations), but it is unitary, which is the important property. The advantage of allowing  $\tau$  to be complex is that, given an arbitrary complex vector x, H can be computed so that

$$H^{\mathrm{H}}x = \beta(1, 0, \dots, 0)^{\mathrm{T}}$$

with *real*  $\beta$ . This is useful, for example, when reducing a complex Hermitian matrix to real symmetric tridiagonal form, or a complex rectangular matrix to real bidiagonal form.

## 3.4 Argument Conventions

#### 3.4.1 Option Arguments

Most routines in this chapter have one or more option arguments, of type CHARACTER. The descriptions in Section 5 of the routine documents refer only to upper case values (for example uplo = 'U' or uplo = 'L'); however in every case, the corresponding lower case characters may be supplied (with the same meaning). Any other value is illegal.

A longer character string can be passed as the actual argument, making the calling program more readable, but only the first character is significant. (This is a feature of Fortran 77.) For example:

```
Call DSYTRD('Upper',...)
```

## 3.4.2 Problem dimensions

It is permissible for the problem dimensions (for example,  $\mathbf{m}$  or  $\mathbf{n}$ ) to be passed as zero, in which case the computation (or part of it) is skipped. Negative dimensions are regarded as an error.

## 3.4.3 Length of work arrays

A number of routines implementing block algorithms require workspace sufficient to hold one block of rows or columns of the matrix if they are to achieve optimum levels of performance – for example, workspace of size  $n \times nb$ , where nb is the optimal block size. In such cases, the actual declared length of the work array must be passed as a separate argument **lwork**, which immediately follows **work** in the argument-list.

The blocked routines in this chapter allow you to perform a workspace query. In this case the routine only calculates the optimal size of the **work** array, and returns this value as the first entry of the **work** array. You are strongly encouraged to perform such a query before using a particular routine. The routine will still perform correctly when less workspace is provided: it simply uses the largest block size allowed by the amount of workspace supplied, as long as this is likely to give better performance than the unblocked algorithm.

If **lwork** indicates that there is insufficient workspace to perform the unblocked algorithm, this is regarded as an illegal value of **lwork**, and is treated like any other illegal argument value (see Section 3.4.4).

## 3.4.4 Error-handling and the Diagnostic Argument INFO

Routines in this chapter do not use the usual NAG Library error-handling mechanism, involving the argument IFAIL. Instead they have a diagnostic argument INFO. (Thus they preserve complete compatibility with the LAPACK specification.)

Whereas IFAIL is an *Input/Output* argument and must be set before calling a routine, INFO is purely an *Output* argument and need not be set before entry.

INFO indicates the success or failure of the computation, as follows:

info = 0: successful termination;

info > 0: failure in the course of computation, control returned to the calling program.

If the routine document specifies that the routine may terminate with info > 0, then it is **essential to test info on exit** from the routine. (This corresponds to a *soft failure* in terms of the usual NAG error-handling terminology.) No error message is output.

All routines check that input arguments such as **n** or **lda** or option arguments of type CHARACTER have permitted values. If an illegal value of the *i*th argument is detected, **info** is set to -i, a message is output, and execution of the program is terminated. (This corresponds to a *hard failure* in the usual NAG terminology.) In some implementations, especially when linking to vendor versions of LAPACK, execution of the program may continue, in which case, it is essential to test **info** on exit from the routine.

## 3.5 Normalizing Output Vectors

In cases where a routine computes a set of orthogonal or unitary vectors, e.g., eigenvectors or an orthogonal matrix factorization, it is possible for these vectors to differ between implementations, but still be correct. Under a strict normalization that enforces uniqueness of solution, these different solutions can be shown to be the same under that normalization. For example, an eigenvector v is computed such that  $|v|_2 = 1$ . However, the vector  $\alpha v$ , where  $\alpha$  is a scalar such that  $|\alpha|_2 = 1$ , is also an eigenvector. So for symmetric eigenproblems where eigenvectors are real valued,  $\alpha = 1$ , or -1; and for complex eigenvectors,  $\alpha$  can lie anywhere on the unit circle on the complex plane,  $\alpha = \exp(i\theta)$ .

Another example is in the computation of the singular valued decomposition of a matrix. Consider the factorization

$$A = UK\Sigma K^{\rm H}V^{\rm H},$$

where K is a diagonal matrix with elements on the unit circle. Then UK and VK are corresponding left and right singular vectors of A for any such choice of K.


The example programs for routines in Chapter F08 take care to perform post-processing normalizations, in such cases as those highlighted above, so that a unique set of results can be displayed over many implementations of the NAG Library (see Section 10 in **f08yxf (ztgevc)**). Similar care should be taken to obtain unique vectors and matrices when calling routines in Chapter F08, particularly when these are used in equivalence tests.


# 4 Decision Trees

The following decision trees are principally for the computation (general purpose) routines. See Section 3.1.1.1 for tables of the driver (black box) routines.

## 4.1 General Purpose Routines (eigenvalues and eigenvectors)

## Tree 1: Real Symmetric Eigenvalue Problems

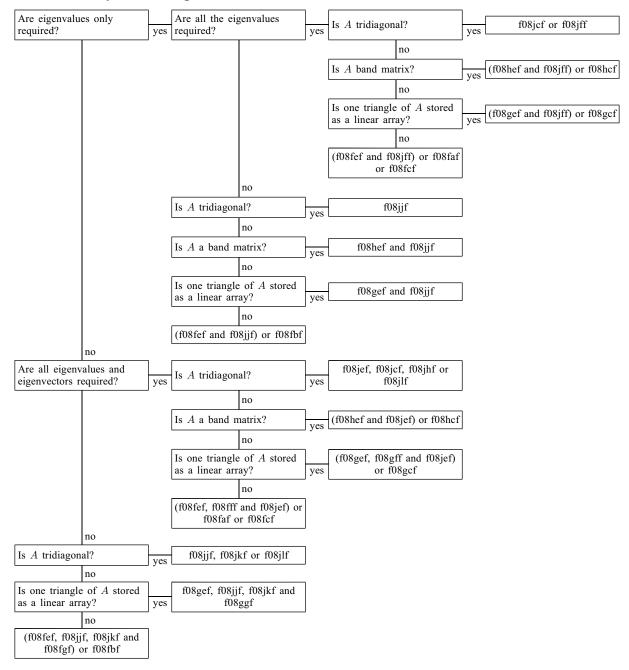


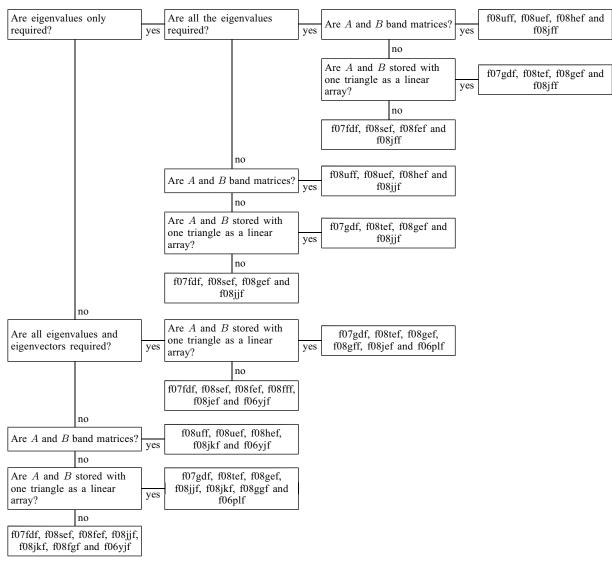


#### Tree 2: Real Generalized Symmetric-definite Eigenvalue Problems


Note: the routines for band matrices only handle the problem  $Ax = \lambda Bx$ ; the other routines handle all three types of problems  $(Ax = \lambda Bx, ABx = \lambda x \text{ or } BAx = \lambda x)$  except that, if the problem is  $BAx = \lambda x$  and eigenvectors are required, f06phf must be used instead of f06plf and f06yff instead of f06yjf.

#### Tree 3: Real Nonsymmetric Eigenvalue Problems

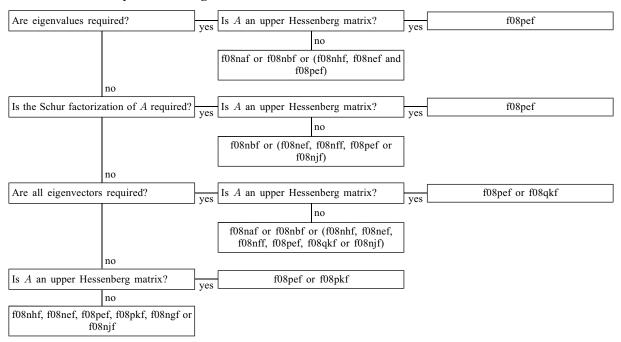


Tree 4: Real Generalized Nonsymmetric Eigenvalue Problems

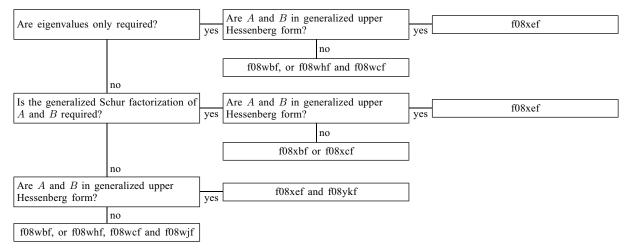

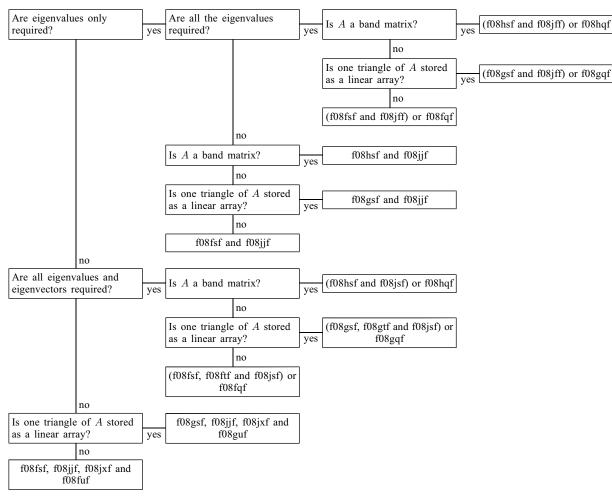



#### **Tree 5: Complex Hermitian Eigenvalue Problems**

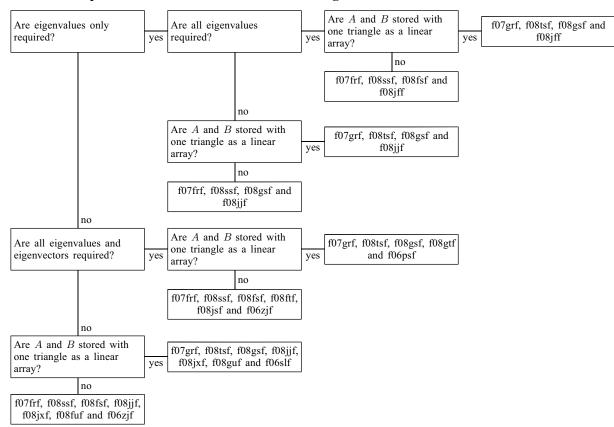

#### Tree 6: Complex Generalized Hermitian-definite Eigenvalue Problems

#### Tree 7: Complex non-Hermitian Eigenvalue Problems

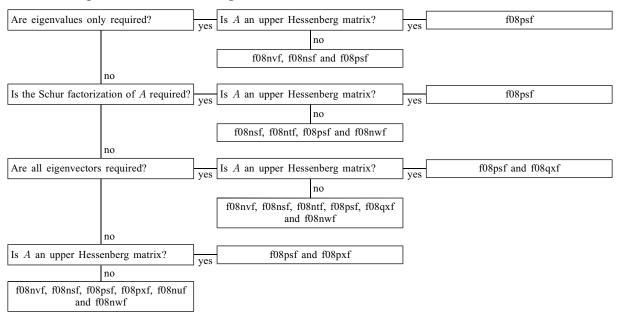

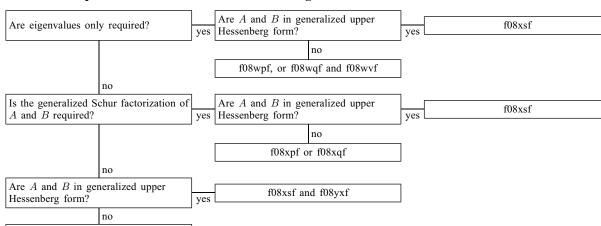


#### Tree 8: Complex Generalized non-Hermitian Eigenvalue Problems

f08wpf, or f08wvf, f08wqf and f08wwf

## 4.2 General Purpose Routines (singular value decomposition)

## Tree 9: Singular Value Decomposition of a Matrix

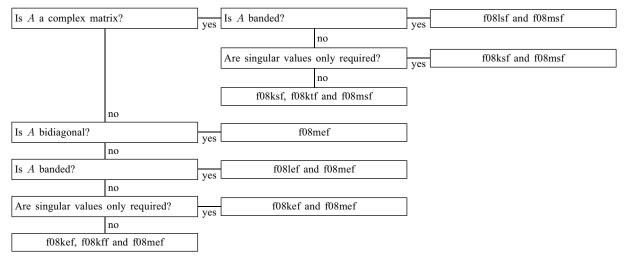

#### Tree 10: Singular Value Decompositon of a Matrix Pair

Are A and B complex matrices	?	yes	f08vqf
	no		
f08	vcf	]	

# **5** Functionality Index

Backtransformation of eigenvectors from those of balanced forms, complex matrix real matrix	f08nwf (zgebak) f08njf (dgebak)
Backtransformation of generalized eigenvectors from those of balanced forms, complex matrix	f08wwf (zggbak) f08wjf (dggbak)
Balancing, complex general matrix complex general matrix pair real general matrix pair	f08nvf (zgebal) f08wvf (zggbal) f08nhf (dgebal) f08whf (dggbal)

Eigenvalue problems for condensed forms of matrices, complex Hermitian matrix, eigenvalues and eigenvectors, band matrix, all/selected eigenvalues and eigenvectors by root-free QR algorithm f08hpf (zhbevx) all eigenvalues and eigenvectors by a divide-and-conquer algorithm, f08hqf (zhbevd) using packed storage..... all eigenvalues and eigenvectors by root-free QR algorithm..... f08hnf (zhbev) general matrix, all/selected eigenvalues and eigenvectors by root-free QR algorithm f08fpf (zheevx) all/selected eigenvalues and eigenvectors by root-free QR algorithm, f08gpf (zhpevx) using packed storage..... all/selected eigenvalues and eigenvectors using Relatively Robust f08frf (zheevr) Representations ..... all eigenvalues and eigenvectors by a divide-and-conquer algorithm. f08fqf (zheevd) all eigenvalues and eigenvectors by a divide-and-conquer algorithm, f08gqf (zhpevd) using packed storage..... all eigenvalues and eigenvectors by root-free QR algorithm..... f08fnf (zheev) all eigenvalues and eigenvectors by root-free QR algorithm, using f08gnf (zhpev) packed storage ..... eigenvalues only, band matrix, all/selected eigenvalues by the Pal-Walker-Kahan variant of the QL f08hpf (zhbevx) or *QR* algorithm ..... all eigenvalues by the Pal–Walker–Kahan variant of the QL or QRf08hnf (zhbev) algorithm..... all eigenvalues by the Pal-Walker-Kahan variant of the QL or QRf08hqf (zhbevd) algorithm, using packed storage..... general matrix, all/selected eigenvalues by the Pal-Walker-Kahan variant of the QL f08fpf (zheevx) or *QR* algorithm..... all/selected eigenvalues by the Pal-Walker-Kahan variant of the QL f08gpf (zhpevx) or QR algorithm, using packed storage..... all eigenvalues by the Pal–Walker–Kahan variant of the QL or QRf08fnf (zheev) algorithm..... all eigenvalues by the Pal-Walker-Kahan variant of the QL or QRf08gnf (zhpev) algorithm, using packed storage..... complex upper Hessenberg matrix, reduced from complex general matrix, eigenvalues and Schur factorization..... f08psf (zhseqr) selected right and/or left eigenvectors by inverse iteration..... f08pxf (zhsein) real bidiagonal matrix, singular value decomposition, after reduction from complex general matrix..... f08msf (zbdsqr) after reduction from real general matrix ..... f08mef (dbdsqr) after reduction from real general matrix, using divide-and-conquer ...... f08mdf (dbdsdc) real symmetric matrix, eigenvalues and eigenvectors, band matrix, all/selected eigenvalues and eigenvectors by root-free QR algorithm f08hbf (dsbevx) all eigenvalues and eigenvectors by a divide-and-conquer algorithm. f08hcf (dsbevd) all eigenvalues and eigenvectors by root-free QR algorithm..... f08haf (dsbev) general matrix, all/selected eigenvalues and eigenvectors by root-free QR algorithm f08fbf (dsyevx) all/selected eigenvalues and eigenvectors by root-free QR algorithm, f08gbf (dspevx) using packed storage..... all/selected eigenvalues and eigenvectors using Relatively Robust f08fdf (dsyevr) Representations ..... all eigenvalues and eigenvectors by a divide-and-conquer algorithm. f08fcf (dsvevd)

all eigenvalues and eigenvectors by a divide-and-conquer algorithm, using packed storage	f08gcf (dspevd)
all eigenvalues and eigenvectors by root-free $QR$ algorithm	f08faf (dsyev)
all eigenvalues and eigenvectors by root-free $QR$ algorithm, using	f08gaf (dspev)
packed storage	
eigenvalues only,	
band matrix,	(0) 01 1 C ( 1 1 )
all/selected eigenvalues by the Pal–Walker–Kahan variant of the $QL$ or $QR$ algorithm	f08hbf (dsbevx)
all eigenvalues by the Pal–Walker–Kahan variant of the $QL$ or $QR$	f08haf (dsbev)
algorithm	
general matrix,	
all/selected eigenvalues by the Pal–Walker–Kahan variant of the $QL$	f08fbf (dsyevx)
or QR algorithm	
all/selected eigenvalues by the Pal–Walker–Kahan variant of the $QL$	f08gbf (dspevx)
or QR algorithm, using packed storage	
all eigenvalues by the Pal–Walker–Kahan variant of the $QL$ or $QR$ algorithm	f08faf (dsyev)
all eigenvalues by the Pal–Walker–Kahan variant of the $QL$ or $QR$	f08gaf (dspev)
algorithm, using packed storage	(uspev)
real symmetric tridiagonal matrix,	
eigenvalues and eigenvectors,	
after reduction from complex Hermitian matrix,	f00izef (mate and)
all/selected eigenvalues and eigenvectors, using Relatively Robust	f08jyf (zstegr)
Representations	f(0):=f(+)
all eigenvalues and eigenvectors	f08jsf (zsteqr)
all eigenvalues and eigenvectors, positive definite matrix	f08juf (zpteqr)
all eigenvalues and eigenvectors, using divide-and-conquer	f08jvf (zstedc)
selected eigenvectors by inverse iteration	f08jxf (zstein)
all/selected eigenvalues and eigenvectors, using Relatively Robust Representations	f08jlf (dstegr)
all/selected eigenvalues and eigenvectors by root-free $QR$ algorithm	f08jbf (dstevx)
all/selected eigenvalues and eigenvectors using Relatively Robust	f08jdf (dstevr)
Representations	• • •
all eigenvalues and eigenvectors	f08jef (dsteqr)
all eigenvalues and eigenvectors, by divide-and-conquer	f08jhf (dstedc)
all eigenvalues and eigenvectors, positive definite matrix	f08jgf (dpteqr)
all eigenvalues and eigenvectors by a divide-and-conquer algorithm	f08jcf (dstevd)
all eigenvalues and eigenvectors by root-free QR algorithm	f08jaf (dstev)
selected eigenvectors by inverse iteration	f08jkf (dstein)
eigenvalues only,	5 ( )
all/selected eigenvalues by the Pal–Walker–Kahan variant of the $QL$ or	f08jbf (dstevx)
QR algorithm	5 ( )
all eigenvalues by root-free $QR$ algorithm	f08jff (dsterf)
all eigenvalues by the Pal–Walker–Kahan variant of the $QL$ or $QR$	f08jaf (dstev)
algorithm	J. (marth)
selected eigenvalues only	f08jjf (dstebz)
real upper Hessenberg matrix, reduced from real general matrix,	55 (1111)
eigenvalues and Schur factorization	f08pef (dhseqr)
selected right and/or left eigenvectors by inverse iteration	f08pkf (dhsein)
	pin (unsem)
Eigenvalue problems for nonsymmetric matrices,	
complex matrix,	
all eigenvalues, Schur form, Schur vectors and reciprocal condition numbers	f08ppf (zgeesx)
all eigenvalues, Schur form and Schur vectors	f08pnf (zgees)
all eigenvalues and left/right eigenvectors	f08nnf (zgeev)
all eigenvalues and left/right eigenvectors, plus balancing transformation and	f08npf (zgeevx)
reciprocal condition numbers	
-	

real matrix,	
all eigenvalues, real Schur form, Schur vectors and reciprocal condition numbers	f08pbf (dgeesx)
all eigenvalues, real Schur form and Schur vectors all eigenvalues and left/right eigenvectors all eigenvalues and left/right eigenvectors, plus balancing transformation and reciprocal condition numbers	f08paf (dgees) f08naf (dgeev) f08nbf (dgeevx)
Eigenvalues and generalized Schur factorization, complex generalized upper Hessenberg form real generalized upper Hessenberg form	f08xsf (zhgeqz) f08xef (dhgeqz)
General Gauss-Markov linear model, solves a complex general Gauss-Markov linear model problem solves a real general Gauss-Markov linear model problem	f08zpf (zggglm) f08zbf (dggglm)
Generalized eigenvalue problems for condensed forms of matrices, complex Hermitian-definite eigenproblems, banded matrices,	
all eigenvalues and eigenvectors by a divide-and-conquer algorithm all eigenvalues and eigenvectors by reduction to tridiagonal form selected eigenvalues and eigenvectors by reduction to tridiagonal form general matrices,	f08uqf (zhbgvd) f08unf (zhbgv) f08upf (zhbgvx)
all eigenvalues and eigenvectors by a divide-and-conquer algorithm all eigenvalues and eigenvectors by a divide-and-conquer algorithm, packed storage format	f08sqf (zhegvd) f08tqf (zhpgvd)
all eigenvalues and eigenvectors by reduction to tridiagonal form all eigenvalues and eigenvectors by reduction to tridiagonal form, packed storage format	f08snf (zhegv) f08tnf (zhpgv)
selected eigenvalues and eigenvectors by reduction to tridiagonal form. selected eigenvalues and eigenvectors by reduction to tridiagonal form, packed storage format.	f08spf (zhegvx) f08tpf (zhpgvx)
real symmetric-definite eigenproblems,	
banded matrices, all eigenvalues and eigenvectors by a divide-and-conquer algorithm all eigenvalues and eigenvectors by reduction to tridiagonal form selected eigenvalues and eigenvectors by reduction to tridiagonal form general matrices,	f08ucf (dsbgvd) f08uaf (dsbgv) f08ubf (dsbgvx)
all eigenvalues and eigenvectors by a divide-and-conquer algorithm all eigenvalues and eigenvectors by a divide-and-conquer algorithm, packed storage format	f08scf (dsygvd) f08tcf (dspgvd)
all eigenvalues and eigenvectors by reduction to tridiagonal form all eigenvalues and eigenvectors by reduction to tridiagonal form, packed storage format	f08saf (dsygv) f08taf (dspgv)
selected eigenvalues and eigenvectors by reduction to tridiagonal form selected eigenvalues and eigenvectors by reduction to tridiagonal form, packed storage format	f08sbf (dsygvx) f08tbf (dspgvx)
Generalized eigenvalue problems for nonsymmetric matrix pairs,	
complex nonsymmetric matrix pairs, all eigenvalues, generalized Schur form, Schur vectors and reciprocal	f08xpf (zggesx)
condition numbers all eigenvalues, generalized Schur form and Schur vectors, deprecated all eigenvalues, generalized Schur form and Schur vectors, using level 3	f08xnf (zgges) f08xqf (zgges3)
BLAS all eigenvalues and left/right eigenvectors, deprecated all eigenvalues and left/right eigenvectors, plus the balancing transformation	f08wnf (zggev) f08wpf (zggevx)
and reciprocal condition numbers all eigenvalues and left/right eigenvectors, using level 3 BLAS	f08wqf (zggev3)

real nonsymmetric matrix pairs, all eigenvalues, generalized real Schur form and left/right Schur vectors, deprecated all eigenvalues, generalized real Schur form and left/right Schur vectors, plus	f08xaf (dgges) f08xbf (dggesx)
reciprocal condition numbersall eigenvalues, generalized real Schur form and left/right Schur vectors,	f08xcf (dgges3)
using level 3 BLAS all eigenvalues and left/right eigenvectors, deprecated all eigenvalues and left/right eigenvectors, plus the balancing transformation and reciprocal condition numbers	f08waf (dggev) f08wbf (dggevx)
all eigenvalues and left/right eigenvectors, using level 3 BLAS	f08wcf (dggev3)
Generalized <i>QR</i> factorization, complex matrices real matrices	f08zsf (zggqrf) f08zef (dggqrf)
Generalized <i>RQ</i> factorization, complex matrices real matrices	f08ztf (zggrqf) f08zff (dggrqf)
Generalized singular value decomposition,	
after reduction from complex general matrix, complex triangular or trapezoidal matrix pair after reduction from real general matrix,	f08ysf (ztgsja)
complex matrix pair, deprecated	f08yef (dtgsja) f08vnf (zggsvd) f08vqf (zggsvd3)
partitioned orthogonal matrix (CS decomposition) partitioned unitary matrix (CS decomposition) real matrix pair, deprecated	f08raf (dorcsd) f08raf (zuncsd) f08vaf (dggsvd)
real matrix pair, using level 3 BLAS reduction of a pair of general matrices to triangular or trapezoidal form, complex matrices, deprecated	f08vcf (dggsvd3) f08vsf (zggsvp)
complex matrices, using level 3 BLAS real matrices, deprecated real matrices, using level 3 BLAS	f08vuf (zggsvp3) f08vef (dggsvp) f08vgf (dggsvp3)
least squares problems,	
complex matrices, apply orthogonal matrix minimum norm solution using a complete orthogonal factorization minimum norm solution using the singular value decomposition minimum norm solution using the singular value decomposition (divide-and-	f08bxf (zunmrz) f08bnf (zgelsy) f08knf (zgelss) f08kqf (zgelsd)
conquer) reduction of upper trapezoidal matrix to upper triangular form real matrices,	f08bvf (ztzrzf)
apply orthogonal matrix minimum norm solution using a complete orthogonal factorization minimum norm solution using the singular value decomposition minimum norm solution using the singular value decomposition (divide-and- conquer)	f08bkf (dormrz) f08baf (dgelsy) f08kaf (dgelss) f08kcf (dgelsd)
reduction of upper trapezoidal matrix to upper triangular form	f08bhf (dtzrzf)
least squares problems with linear equality constraints, complex matrices, minimum norm solution subject to linear equality constraints using a generalized RQ factorization	f08znf (zgglse)
real matrices, minimum norm solution subject to linear equality constraints using a generalized $RQ$ factorization	f08zaf (dgglse)

Left and right eigenvectors of a pair of matrices, complex upper triangular matrices real quasi-triangular matrices	f08yxf (ztgevc) f08ykf (dtgevc)
LQ factorization and related operations, complex matrices, apply unitary matrix factorization form all or part of unitary matrix real matrices,	f08axf (zunmlq) f08avf (zgelqf) f08awf (zunglq)
apply orthogonal matrix factorization form all or part of orthogonal matrix	f08akf (dormlq) f08ahf (dgelqf) f08ajf (dorglq)
Operations on eigenvectors of a real symmetric or complex Hermitian matrix, or singular vectors of a general matrix, estimate condition numbers	f08flf (ddisna)
Operations on generalized Schur factorization of a general matrix pair, complex matrix, estimate condition numbers of eigenvalues and/or eigenvectors re-order Schur factorization re-order Schur factorization, compute generalized eigenvalues and condition	f08yyf (ztgsna) f08ytf (ztgexc) f08yuf (ztgsen)
numbers real matrix, estimate condition numbers of eigenvalues and/or eigenvectors re-order Schur factorization re-order Schur factorization, compute generalized eigenvalues and condition	f08ylf (dtgsna) f08yff (dtgexc) f08ygf (dtgsen)
numbers Operations on Schur factorization of a general matrix, complex matrix,	
compute left and/or right eigenvectors estimate sensitivities of eigenvalues and/or eigenvectors re-order Schur factorization re-order Schur factorization, compute basis of invariant subspace, and estimate sensitivities	f08qxf (ztrevc) f08qyf (ztrsna) f08qtf (ztrexc) f08quf (ztrsen)
real matrix, compute left and/or right eigenvectors estimate sensitivities of eigenvalues and/or eigenvectors re-order Schur factorization re-order Schur factorization, compute basis of invariant subspace, and estimate sensitivities	f08qkf (dtrevc) f08qlf (dtrsna) f08qff (dtrexc) f08qgf (dtrsen)
Overdetermined and underdetermined linear systems, complex matrices, solves an overdetermined or undetermined complex linear system real matrices,	f08anf (zgels)
solves an overdetermined or undetermined real linear system Performs a reduction of eigenvalue problems to condensed forms, and related operations,	f08aaf (dgels)
real rectangular band matrix to upper bidiagonal form QL factorization and related operations, complex matrices, apply unitary matrix	f08lef (dgbbrd) f08cuf (zunmql)
factorization form all or part of unitary matrix real matrices,	f08csf (zgeqlf) f08ctf (zungql)
apply orthogonal matrix factorization	f08cgf (dormql) f08cef (dgeqlf)

form all or part of orthogonal matrix	f08cff (dorgql)
QR factorization and related operations,	
complex matrices,	
general matrices,	
apply unitary matrix	f08auf (zunmqr)
apply unitary matrix, explicitly blocked	f08aqf (zgemqrt)
factorization	f08asf (zgeqrf)
factorization,	
with column pivoting, using BLAS-3	f08btf (zgeqp3)
factorization, explicitly blocked	f08apf (zgeqrt)
factorization, with column pivoting	f08bsf (zgeqpf)
form all or part of unitary matrix	f08atf (zungqr)
triangular-pentagonal matrices,	
apply unitary matrix	f08bqf (ztpmqrt)
factorization	f08bpf (ztpqrt)
real matrices, general matrices,	
apply orthogonal matrix	f08agf (dormqr)
apply orthogonal matrix, explicitly blocked	f08acf (dgemqrt)
factorization,	iooder (ugeniqit)
with column pivoting, using BLAS-3	f08bff (dgeqp3)
factorization, orthogonal matrix	f08aef (dgeqrf)
factorization, with column pivoting	f08bef (dgeqpf)
factorization, with explicit blocking	f08abf (dgeqrt)
form all or part of orthogonal matrix	f08aff (dorgqr)
triangular-pentagonal matrices,	
apply orthogonal matrix	f08bbf (dtpqrt)
factorization	f08bcf (dtpmqrt)
Reduction of a pair of general matrices to generalized upper Hessenberg form,	
orthogonal reduction, real matrices, deprecated	f08wef (dgghrd)
orthogonal reduction, real matrices, using level 3 BLAS	f08wff (dgghd3)
unitary reduction, complex matrices, deprecated	f08wsf (zgghrd)
unitary reduction, complex matrices, using level 3 BLAS	f08wtf (zgghd3)
	(88)
Reduction of eigenvalue problems to condensed forms, and related operations,	
complex general matrix to upper Hessenberg form,	f08nuf (zunmhr)
apply orthogonal matrix form orthogonal matrix	f08ntf (zunghr)
reduce to Hessenberg form	f08nsf (zgehrd)
complex Hermitian band matrix to real symmetric tridiagonal form	f08hsf (zhbtrd)
complex Hermitian matrix to real symmetric tridiagonal form,	ioonsi (znotra)
apply unitary matrix	f08fuf (zunmtr)
apply unitary matrix, packed storage	f08guf (zupmtr)
form unitary matrix	f08ftf (zungtr)
form unitary matrix, packed storage	f08gtf (zupgtr)
reduce to tridiagonal form	f08fsf (zhetrd)
reduce to tridiagonal form, packed storage	f08gsf (zhptrd)
complex rectangular band matrix to real upper bidiagonal form	f08lsf (zgbbrd)
complex rectangular matrix to real bidiagonal form,	
apply unitary matrix	f08kuf (zunmbr)
form unitary matrix	f08ktf (zungbr)
reduce to bidiagonal form	f08ksf (zgebrd)
real general matrix to upper Hessenberg form,	
apply orthogonal matrix	f08ngf (dormhr)
form orthogonal matrix	f08nff (dorghr)
reduce to Hessenberg form	f08nef (dgehrd)
real rectangular matrix to bidiagonal form,	
apply orthogonal matrix	f08kgf (dormbr)

form orthogonal matrix reduce to bidiagonal form real symmetric band matrix to symmetric tridiagonal form real symmetric matrix to symmetric tridiagonal form, apply orthogonal matrix apply orthogonal matrix packed storage form orthogonal matrix packed storage reduce to tridiagonal form reduce to tridiagonal form packed storage	f08kff (dorgbr) f08kef (dgebrd) f08hef (dsbtrd) f08fgf (dormtr) f08ggf (dopmtr) f08fff (dorgtr) f08gff (dopgtr) f08gef (dsytrd) f08gef (dsptrd)
Reduction of generalized eigenproblems to standard eigenproblems, complex Hermitian-definite banded generalized eigenproblem $Ax = \lambda Bx$ complex Hermitian-definite generalized eigenproblem $Ax = \lambda Bx$ , $ABx = \lambda x$ or $BAx = \lambda x$	f08usf (zhbgst) f08ssf (zhegst)
complex Hermitian-definite generalized eigenproblem $Ax = \lambda Bx$ , $ABx = \lambda x$ or $BAx = \lambda x$ , packed storage real symmetric-definite banded generalized eigenproblem $Ax = \lambda Bx$ real symmetric-definite generalized eigenproblem $Ax = \lambda Bx$ , $ABx = \lambda x$ or $BAx = \lambda x$	f08tsf (zhpgst) f08uef (dsbgst) f08sef (dsygst)
real symmetric-definite generalized eigenproblem $Ax = \lambda Bx$ , $ABx = \lambda x$ or $BAx = \lambda x$ , packed storage	f08tef (dspgst)
RQ factorization and related operations, complex matrices, apply unitary matrix factorization form all or part of unitary matrix real matrices, apply orthogonal matrix factorization form all or part of orthogonal matrix	f08cxf (zunmrq) f08cvf (zgerqf) f08cwf (zungrq) f08ckf (dormrq) f08chf (dgerqf) f08cjf (dorgrq)
Singular value decomposition, complex matrix, using a divide-and-conquer algorithm using bidiagonal $QR$ iteration real matrix, preconditioned Jacobi SVD using fast scaled rotations and de Rijks pivoting using a divide-and-conquer algorithm using bidiagonal $QR$ iteration using fast scaled rotation and de Rijks pivoting using fast scaled rotation and de Rijks pivoting	f08krf (zgesdd) f08kpf (zgesvd) f08khf (dgejsv) f08kdf (dgesdd) f08kbf (dgesvd) f08kjf (dgesvj)
Solve generalized Sylvester equation, complex matrices real matrices	f08yvf (ztgsyl) f08yhf (dtgsyl)
Solve reduced form of Sylvester matrix equation, complex matrices real matrices	f08qvf (ztrsyl) f08qhf (dtrsyl)
Split Cholesky factorization, complex Hermitian positive definite band matrix real symmetric positive definite band matrix	f08utf (zpbstf) f08uff (dpbstf)

# 6 Auxiliary Routines Associated with Library Routine Arguments

See the description of the argument **select** in f08paf (dgees) and f08pbf (dgeesx). f08pnz nagf\_lapack\_zgees\_dummy\_select See the description of the argument **select** in f08pnf (zgees) and f08ppf (zgeesx).

F08.52

- f08xaz nagf\_lapack\_dgges\_dummy\_selctg See the description of the argument **selctg** in f08xaf (dgges), f08xbf (dggesx) and f08xcf (dgges3).
- f08xnz nagf\_lapack\_zgges\_dummy\_selctg See the description of the argument **selctg** in f08xnf (zgges), f08xpf (zggesx) and f08xqf (zgges3).

# 7 Routines Withdrawn or Scheduled for Withdrawal

None.

# 8 References

Anderson E, Bai Z, Bischof C, Blackford S, Demmel J, Dongarra J J, Du Croz J J, Greenbaum A, Hammarling S, McKenney A and Sorensen D (1999) *LAPACK Users' Guide* (3rd Edition) SIAM, Philadelphia

Arioli M, Duff I S and de Rijk P P M (1989) On the augmented system approach to sparse least squares problems *Numer*. *Math.* **55** 667–684

Demmel J W and Kahan W (1990) Accurate singular values of bidiagonal matrices SIAM J. Sci. Statist. Comput. **11** 873–912

Golub G H and Van Loan C F (2012) Matrix Computations (4th Edition) Johns Hopkins University Press, Baltimore

Moler C B and Stewart G W (1973) An algorithm for generalized matrix eigenproblems SIAM J. Numer. Anal. 10 241-256

Parlett B N (1998) The Symmetric Eigenvalue Problem SIAM, Philadelphia

Stewart G W and Sun J-G (1990) Matrix Perturbation Theory Academic Press, London

Ward R C (1981) Balancing the generalized eigenvalue problem SIAM J. Sci. Stat. Comp. 2 141-152

Wilkinson J H (1965) The Algebraic Eigenvalue Problem Oxford University Press, Oxford

Wilkinson J H and Reinsch C (1971) Handbook for Automatic Computation II, Linear Algebra Springer-Verlag